Wireless World

Electronics
Radio
Television

January 1961 Two Shillings

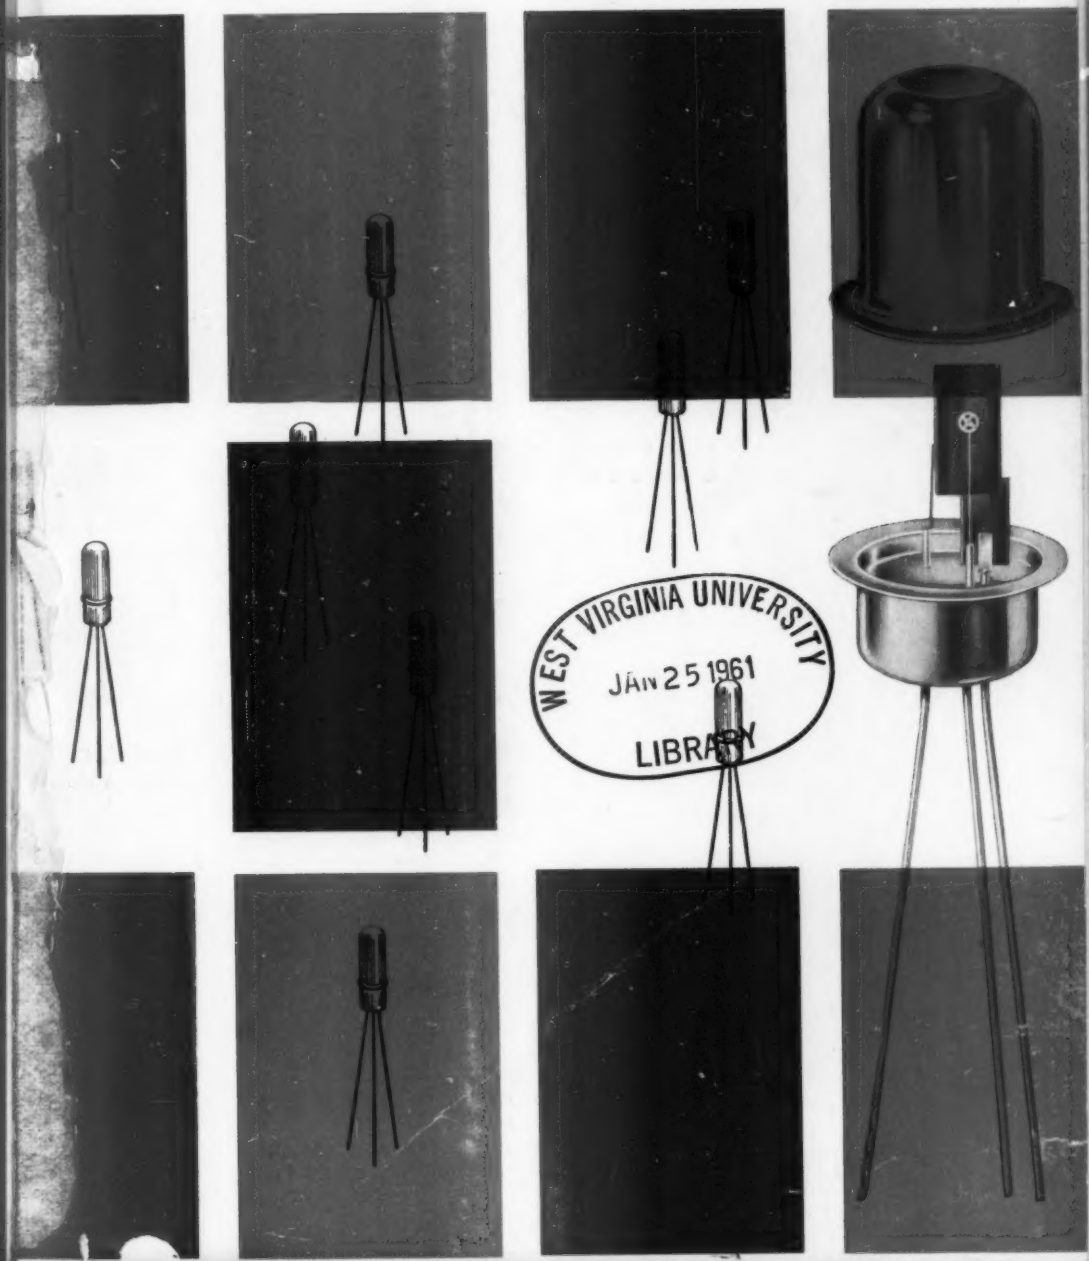

WEST VIRGINIA UNIVERSITY
JAN 25 1961
LIBRARY

TJ 9.
W744
v.67
1961

37-way moulded-on polypole coupler.

BICC

custom-built

POLYPOLE COUPLER SYSTEMS

BICC design and manufacture to customers' specific requirements polypole coupler systems incorporating flexible multicore cables. These systems cover a wide variety of sizes and types of cable each terminated with robust moulded-on couplers.

BICC polypole coupler systems are particularly suitable for the reliable outdoor interconnection of mobile radio or electronic control equipment.

Further information is contained in Publication No. TD TPC 5—available on request.

BRITISH INSULATED CALLENDER'S CABLES LIMITED,
21 BLOOMSBURY STREET, LONDON, W.C.1

AVO INSTRUMENTATION

AVO instruments are in the service of British Railways and transport and industrial undertakings throughout the world.

Regd. Trade Mark

Multi-range Testmeters
Valve Voltmeters
Valve Testers
and other electronic instruments

AVO LTD

AVOCET HOUSE · 92-96 VAUXHALL BRIDGE ROAD · LONDON · S.W.1

Telephone: VICtoria 3404 (12 lines) Telegrams: AVOCET, SOWEST, LONDON

A MEMBER OF THE METAL INDUSTRIES GROUP OF COMPANIES

An Esso Photograph
G84

382031

Illustration by courtesy of British Railways

A new Grommet development

THE DOUBLE SEALING EMPIRE RUBBER GROMMET

infinitely accommodating in use:
considerably reduces range of sizes
because the same grommet can be used with
several plate thicknesses or cable sizes

PAT. APP. No. 5255/59

This newly developed self-conforming grommet, because it is immediately self-locking against the elements, is the solution to many of an engineer's sealing problems.
Any one size will not only accommodate itself to a variety of mounting plate thicknesses, but (designed for cable or control rod) will take these in a variety of sizes and be weather-, water- and dust-proof at a variety of angles to the cable or rod.

Because of its capacity to conform to many varying requirements, it enables a workshop stock range of grommets to be reduced to perhaps one tenth of that at present maintained.

THE NEW BLIND GROMMET



FREE

THE NEW DESIGNED GROMMET



FREE

FITTED

Note how when sprung into position the grommet provides a perfect double seal by its own permanent pressures. The angled groove also creates a tight pressure hold on the metal plate.

In the cable grommet variety the same double pressure seal is created, allied to tight seal on various diameters of cable. This new grommet gives sound sealing at *all* vital points.

A useful feature of this cable grommet is that by reason of the designed taper of the cable entry and the flexibility of the web, a considerable angle of cable entry and a variety of cable size are possible. This avoids necessity for special grommets with angled bores.



In the conventional grommet, only one thickness of plate and only one size of cable can be accommodated. No effective seal is afforded by the parallel groove.

Now being produced in a range of sizes
THESE GROMMETS WILL SOLVE
YOUR SEALING PROBLEMS

ENQUIRE
for catalogue section and detailed particulars.

EMPIRE RUBBER COMPANY • DUNSTABLE • BEDFORDSHIRE • ENGLAND

R.B.101

GERMANIUM POWER TRANSISTORS

are best selected from this chart

—then you should contact the MULLARD technical information service, who will give you all the data you need to confirm your choice.

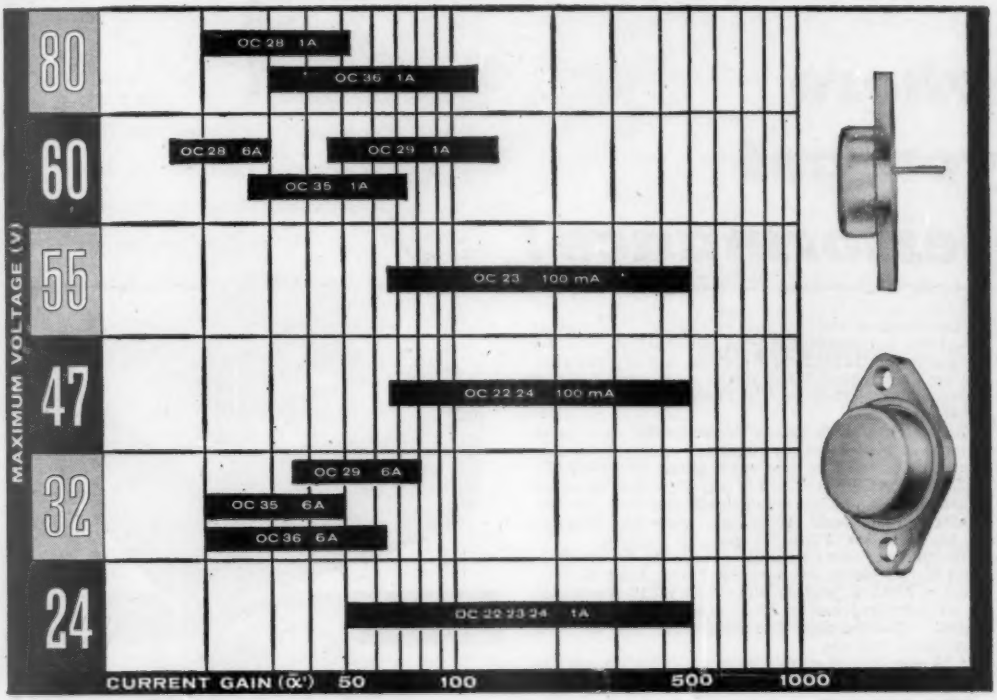

GREY is maximum allowable collector -emitter voltage at maximum continuous current.

BLACK is maximum allowable collector base voltage Vcb max. (Ie=0).

Here is a guide to recommended applications:

- ✲ **OC22** for high-quality industrial audio
- ✲ **OC23** for ferrite memory core drive
- ✲ **OC24** for r.f. power applications
- ✲ **OC28** for d.c. converters (24V version)
- ✲ **OC29** for extra high gain
- ✲ **OC35** for general purpose, low-cost application
- ✲ **OC36** for general purpose, high-power audio and d.c. converters (12V version)

Mullard

semiconductors for industry

SEMICONDUCTOR DIVISION
Mullard Limited · Mullard House · Torrington Place · London WC1 · Tel: LANgham 6633

MIS 272

GD514

HERE'S

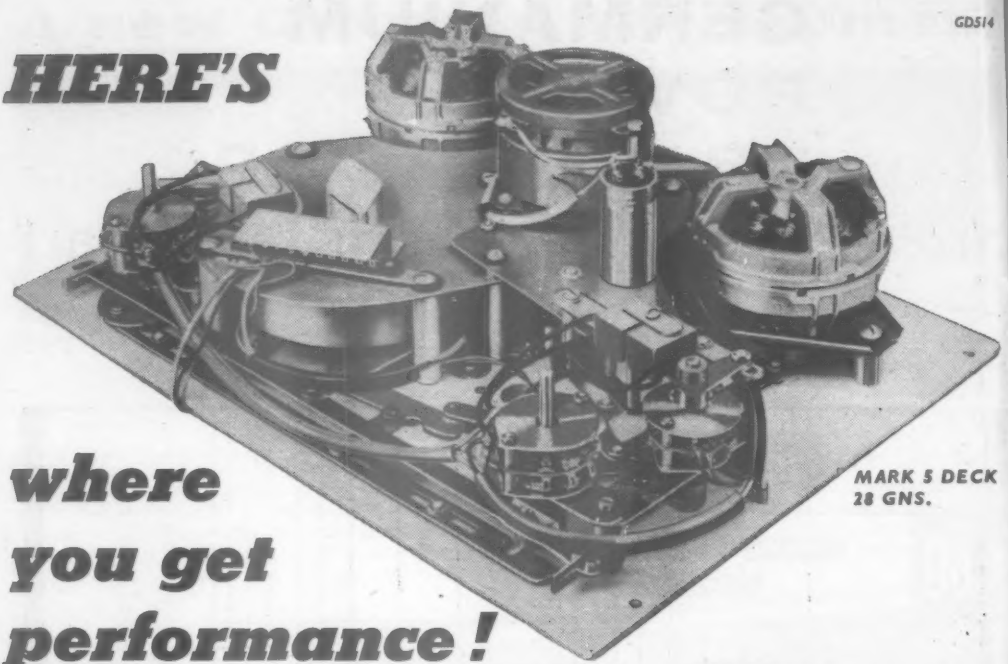

MARK 5 DECK
28 GNS.

where you get performance!

A tape recorder is only as good as its deck. This is where precision in manufacture and assembly is vital for professional standards of recording and reproduction. In the Brenell Mark 5 deck there's a rare combination of advanced technology and an almost-forgotten kind of craftsmanship.

The Mark 5 deck has a remarkable, new main motor of a type widely regarded as the most efficient to be used in tape recording. The HYSTERESIS SYNCHRONOUS MOTOR, with a balanced outer rotor and a heavy, statically and dynamically balanced flywheel. It brings 'wow and flutter' down to below .1% at 7½ ips!

This and the other components providing the specification shown below are assembled with fanatical care. Brenell Mark 5 (**and** all other equipment) production is an individual task which is repeatedly checked and tested. Nothing less than mechanical and electrical perfection will do.

At **28 gns.**, you'd be missing a great deal to pay less and there's no need to pay more.

Abridged specification
3 INDEPENDENT MOTORS
4 RECORDING SPEEDS
FAST REWIND in either direction. 1,200ft. reel rewound in 45 seconds.

WOW AND FLUTTER				FREQUENCY RANGE:			
Below	.05%	at	25 ips	15 ips:	50/16,000 c/s	±	3db
Below	.1%	at	7½ ips	7½ ips:	60/12,000 c/s	±	3db
Below	.15%	at	3¾ ips	3¾ ips:	60/7,000 c/s	±	3db
Below	.25%	at	1⅞ ips	1⅞ ips:	60/4,000 c/s	±	3db

SELECTIVE FREQUENCY CORRECTION at 15, 7½ and 3¾ ips. ACCEPTS 8½in. REELS, PAUSE CONTROL, DIGITAL REV. COUNTER. PROVISION FOR EXTRA HEADS.

3 STAR

MK. 5

TAPE RECORDERS:

3 STAR: 58 GNS.
MK.5: 64 GNS.
3 STAR. R/P STEREO: 89 GNS.
MK.5 R/P STEREO: £99 . 12 . 0

* ½ track available with 3 Star models

Brenell

Full details and the address of your nearest stockist from the Sole Manufacturers
BRENELL ENGINEERING CO. LTD. · 1a DOUGHTY STREET · LONDON WC1 CHAN 5809 & HOL 7358

Printed Circuit Counter Panels

A complete range of transistorized counter panels of common size, fixing method and electrical connexion, designed to provide a flexible unit system whereby any special requirements in the counting or data processing fields can be quickly built up.

A fully illustrated brochure giving complete performance and specification figures for every panel in the range is available on request.

50kc/s Scaler
1Mc/s Scaler
Input Amplifier
Gate Unit
10kc/s Oscillator
1Mc/s Oscillator
Power Unit
50kc/s Read-out Scaler
1Mc/s Read-out Scaler
4 Channel Output Unit
Read-out Unit
Meter Display Unit
Lamp Display Unit
Numerical Indicator Tube
Shift Register Stage
Shift Register Driver

CINTEL INSTRUMENT Division

RANK CINTEL LIMITED
Worsley Bridge Road · London · SE 26
HITher Green 4600

Sales and Servicing Agents:
Atkins, Robertson & Whiteford Ltd. Industrial Estate, Thornliebank, Glasgow;
McKellen Automation Ltd., 122 Seymour Grove, Old Trafford, Manchester, 16;
Hawnt & Co. Ltd., 112/114 Pritchett Street, Birmingham 6

Portable/Mobile

V.H.F RADIO TELEPHONE

TYPE W.S B44 MK2.

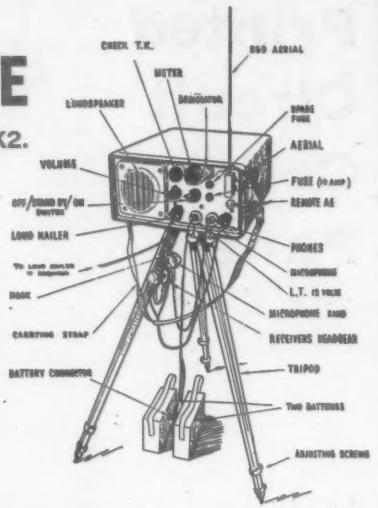

EXPORT ONLY

CRYSTAL CONTROLLED 60-95mc/s.

A modern 14-valve superhet receiver and AM transmitter using current series of B7g valves. Valve line-up: 2–CV136/7D9, 1–CV137/EAC91, 7–CV138/EF91, 4–CV416/6F17. Robust cast aluminium case includes 5in. loudpseaker. Internal vibrator pack (synchronous type) provides operation from 12-volt accumulators or vehicle or boat 12-volt supply, in fixed or mobile use. Available, less crystals and accessories, but with connecting plugs, ex-stock. Accessories and crystals for specified frequencies in the range 60–95 Mc/s can be supplied to order at extra cost.

Each unit is fully tested and in good condition. Price (including packing FOB London), £20 each.

Special quotation for quantities up to 500 sets.

---

50 MICRO AMP MOVING COIL METERS

Brand New & Boxed—Large Stocks available

Made on Government Contract by Famous British Maker

3½in. Square—800 ohms resistance. 4 Scales operated by lever "Set-zero"—"0–3"—"0–30"—"0–300." Easily coupled to rotary range switch by cord or lever. Ideally suitable for transistor tester, output meter, volt-milliameter. Adjustable to work as centre-zero 25–0–25 μA.

A RANGE OF METER BOXES

Useful for all kinds of testgear, a quality job in welded steel, finished in grey hammer stoved enamel. Standard panel size 4½" x 7¼", available in depths 2", 3", 4" and 6".

UNDRILLED: 2" 12/6: 3" 13/-: 4" 13/6: 6" 15/-. With panel punched to take one 50μA meter, add 1/6, or to take two meters 2/6.

Complete with data

ONE METER **19/6** (*plus post 6d in U.K.*)

TWO METERS **35/-** (*plus post 1/- in U.K.*)

SPECIAL PRICES FOR 100 LOTS

TEST GEAR COMPONENTS (LONDON) LTD

15 ARCANY ROAD, SOUTH OCKENDON, ESSEX *TEL: SOUTH OCKENDON 2610*

Goodmans loudspeakers are subjected to the most severe examination in the anechoic chamber, shown above, during both development and subsequent manufacture, ensuring that your GOODMANS HIGH FIDELITY LOUDSPEAKER has "passed with honours" and that its performance will justify your choice.

AXIOM 110
Price £3.15.9 (Plus P.T. £1.4.3)
Power Handling : ..... 10 Watts.
Flux Density : ..... 12,000 Gauss.

AXIOM 112 as illustrated
Price £6.8.8 (Plus P.T. £2.1.4)
Power Handling : ..... 12 Watts.
Flux Density : ..... 16,000 Gauss.

BOTH UNITS have a frequency range of 40-15,000 c/s and impedance of 15 ohms.

GOODMANS

GOODMANS INDUSTRIES LIMITED, Axiom Works, Wembley, Middlesex.
Tel : Wembley 1200 (8 lines) Grams : Goodaxiom, Wembley, England
Available in all countries.
In every sense the greatest range—in every country the greatest name

Please send High Fidelity Manual.
Name .....
Address .....
.....
.....
G 44 WW

meters made to measure

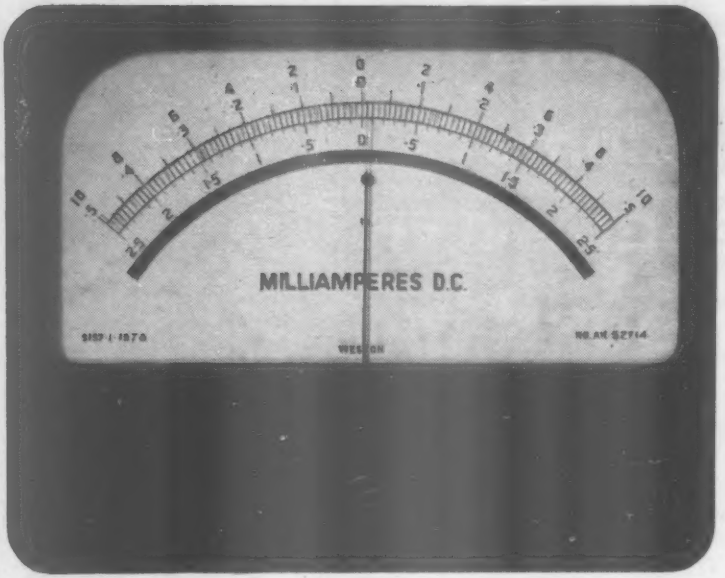

This multi-range meter, using Sangamo Weston S.157, is one of several similar instruments produced by Anders for Ultra Electronics Limited within 14 days. The meters are used in Ground Test Equipment supplied to B.O.A.C. (shown below) for testing the Ultra Engine Throttle Control fitted in Bristol Britannia Aircraft. A typical example of the quick service Anders are giving to many famous firms. Anders are indebted to Ultra Electronics Limited and B.O.A.C. for permission to illustrate this equipment.

special multi-range meter produced for Ultra in 14 days



The Anders Instrument Centre is in a unique position to meet the most urgent, and the most unusual, meter requirements from production, development and research. Most standard meters are available immediately from stock. Non-standard meters are calibrated, tested, and normally ready within 10-14 days. All shapes; sizes from 1½" to the largest switchboard meters. All well-known makes and all types including moving coil, moving iron, thermocouples, electrostatic, dynamometers and full range of meter accessories. Anders would like to demonstrate the kind of service they can give you and look forward to your enquiries, by letter or by telephone.

ANDERS ELECTRONICS LIMITED

103 Hampstead Road, London NW1. Tel: EUSton 1639

Contractors to GPO and Government Departments.
Ministry of Aviation approved.

METERS, ELECTRONIC AND TEST EQUIPMENT TO INDIVIDUAL SPECIFICATIONS

So easy to build

Heathkit
DAYSTROM

so easy to use

6 W STEREO AMPLIFIER KIT Model S-33

A versatile high-quality self-contained STEREO/MONAURAL Amplifier with adequate output for a living room. Can be used to convert a favourite (monaural) radiogram into a stereo-radiogram. 3 watts per channel; 0.3% distortion at 2.5 w/chnl.; 20 dB N.F.B., inputs for Radio (or Tape) and Gram., Stereo or Monaural; Ganged controls. Sensitivity 100 mV.

£11.8.0

HI-FI SINGLE CHANNEL AMPLIFIER KIT Model MA-12



A compact high fidelity power amplifier (including auxiliary power supply). 12 watts output. Wide frequency range and low distortion. A variable sensitivity control is fitted enabling it to be used with an existing amplifier in a stereophonic system. Other applications include sound reinforcing systems, transmitter modulators, for use with tape recorders, also as a general purpose laboratory amplifier.

£9.19.6

TRANSCRIPTION RECORD PLAYER Model RP-1U

With 4-spd. A.C. motor unit and Stereophonic Pick-up completely assembled on plinth. *High performance at low cost.*

This attractive Transcription Record Player incorporates many new features which make it suitable for all types of recordings on discs. It has the new Collaro RP.594 unit with the Ronette Stereo Pick-up and gives excellent results on stereo or mono (16, 33, 45 L.P. or 78 r.p.m.) gramophone records.

£12.10.0

STEREO-HEAD BOOSTER KIT Model USP-1

Hi-Fi Stereo Pre-Amplifier for low-output Hi-Fi P.U.s. Input 2 mV. to 20 mV. Output adjustable from 20 mV. to 2 V. 40-20,000 c/s. Also suitable as low-noise R.C.-Coupled high-gain monaural amplifier.

£5.19.6

GLOUCESTER STEREO CABINET KIT

OPEN

Specially developed to meet the varying needs of different homes. It will house Tape Deck and/or Record Player, F.M. Tuner and Stereo Amplifier. In addition, for the convenience of those to whom space is an overriding consideration, it is possible to house speaker systems at each end. For this purpose a loudspeaker kit, comprising two 4in. plus 8in. speaker systems, balance unit, speaker grille, cutting template, padsaw and mounting details is also available. Neutral hardwoods have carefully been selected so that the finished product can be stained and polished to individual choice. There is storage space for records, etc., also for power amplifiers. Dimensions: length 46½in., height 30in., depth 21in.

CLOSED

Mk. I for Tape Deck or Record Player £15 18 4
Mk. II for both T/D and R/P £17 8 6

CHEPSTOW EQUIPMENT CABINET KIT

Specially designed for those whose floor space is at a premium. Will house Record Player, FM Tuner, Stereo Amplifier and additional power amplifiers where needed. An upper deck is available for the self-powered stereo amplifiers to ensure maximum heat dissipation. Veneered and left in white for finishing to personal taste. Overall dimensions are 35in. x 18in. x 33in. high.

£10.10.0

● **Deferred Terms** ●
available on all orders above £10.

HI-FI STEREO AMPLIFIER KIT Model S-88

Gives 16 w. output (8 per channel with 0.1 per cent. distortion at 6 w. per channel). It has ganged controls. STEREO/MONAURAL gram, radio and tape recorder inputs and push-button selection as well as many other first class features well above its price range. In two-tone grey metal cabinet with a golden surround and fittings. Also ultra-linear push-pull output. Basic sensitivity 10 mV. (2 mV. available 20/- extra).

£25.5.6

HI-FI SPEAKER SYSTEM KIT Model SSU-1

Ducted-port bass reflex cabinet, "in the white." Frequency response to 40-16,000-c/s. Power rating 25 watts. Matched speaker units 8in. high flux (12,000 lines) with hyperbolic cone and 4in. wide angle dispersion type for higher frequencies. With legs £11/12/6.....

£10.5.6

COTSWOLD SPEAKER SYSTEM KIT

This acoustically designed enclosure measures 26 x 23 x 15½in. and houses a special 12in. bass speaker with 2in. speech coil, elliptical middle speaker together with a pressure unit to cover the full frequency range of 30-20,000 c/s. Its polar distribution makes it ideal for really Hi-Fi Stereo. Delivered complete with speakers, cross-over unit, level control, Tygan grille cloth, etc. Left "in the white" for finish to personal taste, all parts are precut and drilled for ease of assembly.

£19.18.6

STEREO CONTROL UNIT KIT Model USC-1

Incorporates all worthwhile features for high fidelity stereo and mono. Push-button selection, accurately matched ganged controls to ±1dB. Negative feedback rumble and variable low-pass filters. Printed circuit boards. Accepts inputs from most tape heads and any stereo or mono-pick-up.

£17.19.6

TAPE DECKS now available as "packaged deals" with other equipment. *Details on request.*

DAYSTROM LTD.

DEPT. W.W.1, GLOUCESTER, ENGLAND

A member of the Daystrom Group. *MANUFACTURERS OF THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS*

Technically Heathkit DAYSTROM excellent

5in. OSCILLOSCOPE KIT
Model O-12U

Laboratory quality at utility oscilloscope price and ease of assembly make this kit of outstanding value. Vertical frequency response 3 c/s to 5 Mc/s., +1.5 dB. −5 dB., sensitivity 10 mV. per cm. at 1 kc. Horizontal frequency 1 c/s. to over 400 kc/s. (±1 dB. up to 200 kc/s.). The Heath patented sweep circuit functions from 10 c/s to 500 kc/s. in five ranges giving five times the usual sweep of other 'scopes. In addition it has exceedingly short re-trace and rise times and electronically stabilised power supply. Included is a 48-page instructional Manual. **£34.15.0**

ELECTRONIC SWITCH KIT Model (Oscilloscope Trace Doubler) S-3U

This extremely useful, low priced device will extend the use of your single-beam oscilloscope for duties otherwise only in the province of the double-beam tube.
In short, at a nominal cost, the Heathkit model S-3U will give you the advantages of a double (or other multiple) beam 'scope, while retaining all the advantages of your present single-beam instrument.
Hitherto an electronic switch of this nature, permitting the simultaneous observation of two signals on the screen of a single-beam C.R.T. oscilloscope, has cost nearly as much as the 'scope itself. **£9.18.6**

RESISTANCE-CAPACITANCE BRIDGE KIT Model C-3U

Measures capacity 10pF to 1,000μF, resistance 100Ω to 5 megohms and power factor. 5-450 v. test voltages. Safety switch provided.
£7.19.6

AUDIO SIGNAL GENERATOR KIT
Model AG-9U

10 c/s. to 100 kc/s., switch selected. Distortion less than 0.1%. 10 v. sine wave output metered in volts and dB's. **£19.3.0**

AUDIO VALVE MILLIVOLTMETER KIT Model AV-3U
Very sensitive. High stability. 1 mV. to 300 V. A.C. 10 c/s to 400 kc/s.
£13.18.6

MULTIMETER KIT
Model MM-1U

Provides wide voltage, current, resistance and dB ranges to cover hundreds of applications. Sensitivity 20,000 ohms/volt D.C. and 5,000 ohms/volt A.C. Ranges: 0-1.5V. to 1,500V A.C. and D.C.; 150μA to 15A D.C.; 0.2Ω to 20MΩ. 4½in. 50 μA meter. **£11.8.6**

DECADE CAPACITOR KIT Model DC-1U
Capacity values 100μμF to 0.111μF in 100μμF steps. Precision silver-mica capacitors and minimum loss ceramic wafer switches ensure high accuracy. **£5.18.6**

TRANSISTOR PORTABLE RADIO KIT Model UXR-1



Presented in elegant real hide case with tasteful gold relief. Can be assembled in 4 to 6 hours, and you have a set in the top flight of transistor portables. Pre-aligned I.F. transformers, printed circuit and a 7in. x 4in. high-flux speaker. **£14.18.6**

HI-FI F.M. TUNER

Tuning range 88-108 Mc/s. Flywheel tuning. Attractive Plastic Front Panel in two-tone grey with golden trim, surround and motif. Thermometer type visual tuning indicator. Pre-aligned I.F. transformers (eliminates adjustment). Three I.F. Stages. Wide-band low distortion. Ratio Detector. Complete R.F. Unit, wired, tested and pre-aligned (ready for mounting to chassis). Printed circuit for I.F. Amplifiers and Ratio Detector, for ease of assembly. No alignment necessary after assembling. Built-in power supply. Output sockets for stereophonic adaptor (for stereo transmission when available).

TUNER UNIT Model FMT-4U (incl. 16/11 P.T.) with 10.7 Mc/s. I.F. output £3 2 0

FI.. AMPLIFIER Model FMA-4U complete with case and valves £10 10 6

Sold separately .....Total £13 12 6

CAPACITANCE METER KIT
Model CM-1U

This Direct-Reading Capacitance Meter is a very low priced, time-saving instrument which is so useful that it should be part of the general equipment of every electronic laboratory and production line. Easily built in a few hours. 0-100μμF, 0-1,000μμF, 0-0.01μF, 0-0.1μF. The meter has 4½in. scale and can be used by an unskilled operator after a few minutes' instruction. **£14.10.0**

2¾in. SERVICE OSCILLOSCOPE KIT Model OS-1
Light, compact, portable, for service engineers. Printed circuit board for easy construction. Wt. 10½ lb. Size 5in. x 8in. x 14½in. long. **£18.19.6**

POWER SUPPLY UNIT KIT
Model MGP-1



Compact, general purpose unit suitable for FM Tuners, Tape Recording Amplifiers and general Laboratory use. Input 100/120 v., 200/250 v., 40-60 c/s. Output 6.3 v. 2.5 A. A.C.; 200, 250, 270 v. 120 mA. max. D.C.
£4.9.0

AUDIO WATTMETER KIT
Model AW-1U
This popular meter is used in many recording studios and broadcasting stations as a monitor as well as for servicing purposes. Dissipation rating up to 25 w. continuous, 50 w. intermittent. **£13.18.6**

VALVE VOLTMETER KIT
Model V-7A

The world's most popular valve voltmeter, with printed circuit and 1 per cent. precision resistors to ensure consistent laboratory performance. It has 7 voltage ranges measuring respectively d.c. volts to 1,500 and a.c. to 1,500 r.m.s. and 4,000 peak to peak. Resistance measurements from 0.1 ohm to 1,000 M ohms with internal battery. D.C. input impedance is 11 Megohms and dB measurement has a centre-zero scale. Complete with test prods, leads and standardising battery. **£13.0.0**

R.F. PROBE KIT Model 309-CU
This complete probe kit will extend the frequency range of the V-7A Valve Voltmeter to 100 Mc/s. and will enable useful voltage indication to be obtained up to 300 Mc/s. **£1.5.6**

● Deferred Terms available on all orders above £10. ●

DAYSTROM LTD.
DEPT. W.W. 1, GLOUCESTER, ENGLAND
A MEMBER OF THE DAYSTROM GROUP, MANUFACTURERS OF

thoroughly **Heathkit** DAYSTROM dependable

"HAM" TRANSMITTER KIT
Model DX-40U



Covers all amateur bands from 80 to 10 metres. Power input 75 watts C.W. 60 watts peak controlled carrier phone. Output 40 watts to aerial. Provision for V.F.O. Filters minimise T.V. interference. **£29.10.0**

BALUN COIL UNIT KIT
Model B-1U



Useful transmitter accessory. Will match unbalanced coaxial lines, used on most modern transmitters, to balanced lines of either 75 or 300Ω impedance. Can be used with transmitters and receivers without adjustment over the frequency range of 80 through 10 meters, and will handle power inputs up to 200 watts. **£4.4.6**

MATCHED HI-FI STEREO KIT

4-speed Transcription Record Player Model RP-1U	£12 10 0
6 w. Hi-Fi Amplifier, Model S-33	£11 8 0
Twin Stereo Speaker Systems Model SSU-1	£20 11 0
Total cost if purchased separately	£44 9 0

YOURS for **£42.10.0**

if all ordered together, or £8/8/- deposit and 9 monthly payments of £4/3/-. Pedestal speaker legs £2/14/- optional extra.

PERSONAL TRANSISTOR RADIO KIT
Model UJR-1

Operated by a 4.5V. torch battery, this sensitive dual-wave headphone set is a fine introduction to electronics for young and old. In Polystyrene moulded plastic case which accommodates battery (and amplifier if added). **£2.16.6**

Additional Amplifier Stage Model UJR-1S will enable the UJR-1 to work a loudspeaker under favourable conditions. 16/6 extra.

FREE

A copy of our latest (British) Heathkit Catalogue will be sent upon request.

All prices include free delivery in U.K.

★ Latest Additions ★
to our range of kits

TAPE AMPLIFIER UNITS
Models TA-1M and TA-1S

This Combined Tape Record/Replay Amplifier is available in both monophonic and Stereophonic models. Model TA-1M can be modified to the stereo version with modification kit TA-1C.

TA-1M £16/14/-; TA-1S, £22/4/-; TA-1C, £6.

4-wave TRANSISTORISED PORTABLE RADIO
Model RSW-1

Using 7 latest type transistors and three diodes this highly sensitive set is specially designed for Short and Medium wavebands (200–550, 90–200, 18–50 and 11–18 m.). In solid leather case fitted with retractable whip aerial..... **£20.18.6**

R.F. SIG. GENERATOR
Model RF-1U

Provides extended frequency coverage on six bands from 100 kc/s.-100 Mc/s. on fundamentals and up to 200 Mc/s on calibrated harmonics. **£11.11.0**

GRID-DIP METER
Model GD-1U

Functions as oscillator or absorption wave meter. With plug-in coils for continuous frequency coverage from 2 Mc/s. to 250 Mc/s. **£9.19.6**

Two Additional Plug-in Coils Model 341-U extend coverage down to 350 kc/s. With dial correlation curves, 15/-.

TRANSISTORISED GRID-DIP METER
Model XGD-1

Similar to GD-1U. Fully transistorised with a frequency range of 1.75 to 45 Mc/s. **£9.18.6**

AMATEUR TRANSMITTER KIT
Model DX-100U

The world's most popular "Ham" T.X. Kit

- Completely self-contained, compact "Ham" Transmitter.
- Built-in, high stable VFO and all Power Supplies.
- TVI: Careful design has reduced TVI to a minimum by use of effectively screened frequency-generating stages and pi tuned circuits at the input and output of the PA stage, and by 11 chokes and pi network filters to all outlets from the cabinet. No fewer than 35 disc-ceramic by-pass capacitors help to achieve the exceptional stability and high-performance for which this Transmitter is noted.
- The KT88 high-level anode and screen modulator stage gives over 100 watts of audio from less than 1.5 mV. input.
- Adjustable drive and clamp control ensure that valves are only driven sufficiently to maintain the required output.
- Keying on CW is via the VFO and buffer amplifier cathodes; the other RF valves are biased beyond cut-off. When zero-beating the TX with incoming signals, the exciter stages only may be run without the final amplifier being switched on.
- Provision has been made for remote control operation.
- VFO slow-motion drive is very smooth and back-lash free. ● VFO or Crystal control.
- Covers all Amateur bands up to 30 Mc/s. phone or CW **£78.10.0**

VARIABLE FREQUENCY OSCILLATOR KIT
Model VF-1U

Specially designed to meet the demand for the maximum possible flexibility from an amateur Transmitter which would otherwise be subject to certain limitations imposed by crystal control. For all Amateur Bands 160–10 metres. Ideal for Heathkit DX-40U and similar transmitters ..... Price less valves **£8/19/6.** **£10.12.0**

Our Technical Consultation and Service Departments are always ready to help in the unlikely event of your experiencing any difficulty.

Please send me FREE CATALOGUE (Yes/No).....

Full details of Model(s) .....

NAME .....
(Block Capitals)

ADDRESS .....

..... WW1

● Deferred Terms available on all orders above £10 ●

DAYSTROM LTD.

DEPT. W.W.1, GLOUCESTER, ENGLAND

THE WORLD'S LARGEST-SELLING ELECTRONIC KIT-SETS

THESE GO

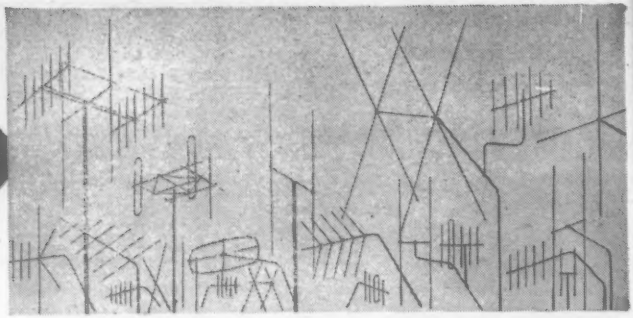

because of THIS....

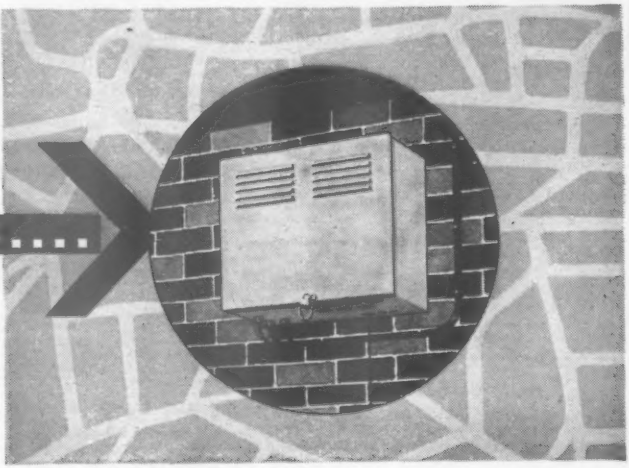

● GOOD STRONG SIGNALS
● CLEAN PICTURES
● ELIMINATION OF AERIALS

An occasional intermediate amplifier and neat house-to-house wiring are the only visible evidence that, in this area, for the first time T.V. is being enjoyed at its best, with clean pictures, no interference and no aerial replacement and repair costs.

Built with the future in mind, the installations of to-day are capable of handling a third or fourth channel—or more, colour, "coin-in-the-slot" T.V. or any foreseeable development in television and sound techniques.

EMI COMMUNITY TELEVISION SYSTEM

Full technical particulars together with any planning assistance that may be required can be obtained from

THE GRAMOPHONE COMPANY LIMITED.
Recording and Relay Equipment Division,
HAYES, MIDDLESEX, ENGLAND. - Telephone: Southall 2468
(One of the E.M.I. Group of Companies)

ec/crv/s

NEW VINKOR SERIES

Covers frequencies from 100 Kc/s to 2 Mc/s

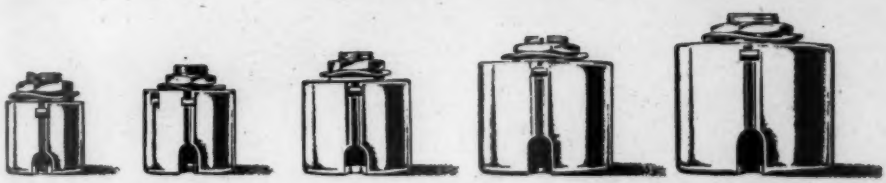

A new series of Vinkor adjustable pot cores has now been developed by Mullard for use in the frequency range 100 kc/s to 2 Mc/s. This series is in addition to the highly successful group already widely used for frequencies between 1 kc/s and 200 kc/s.
The world's most efficient pot core assembly, the Mullard Vinkor gives a choice of 3 permeabilities and has exceptionally high performance and stability.
Write today for full details of the wide range of Vinkors now available.

Mullard VINKOR

ADJUSTABLE POT CORE ASSEMBLIES

MULLARD LTD., COMPONENT DIVISION, MULLARD HOUSE, TORRINGTON PLACE, W.C.1.

MCT1D

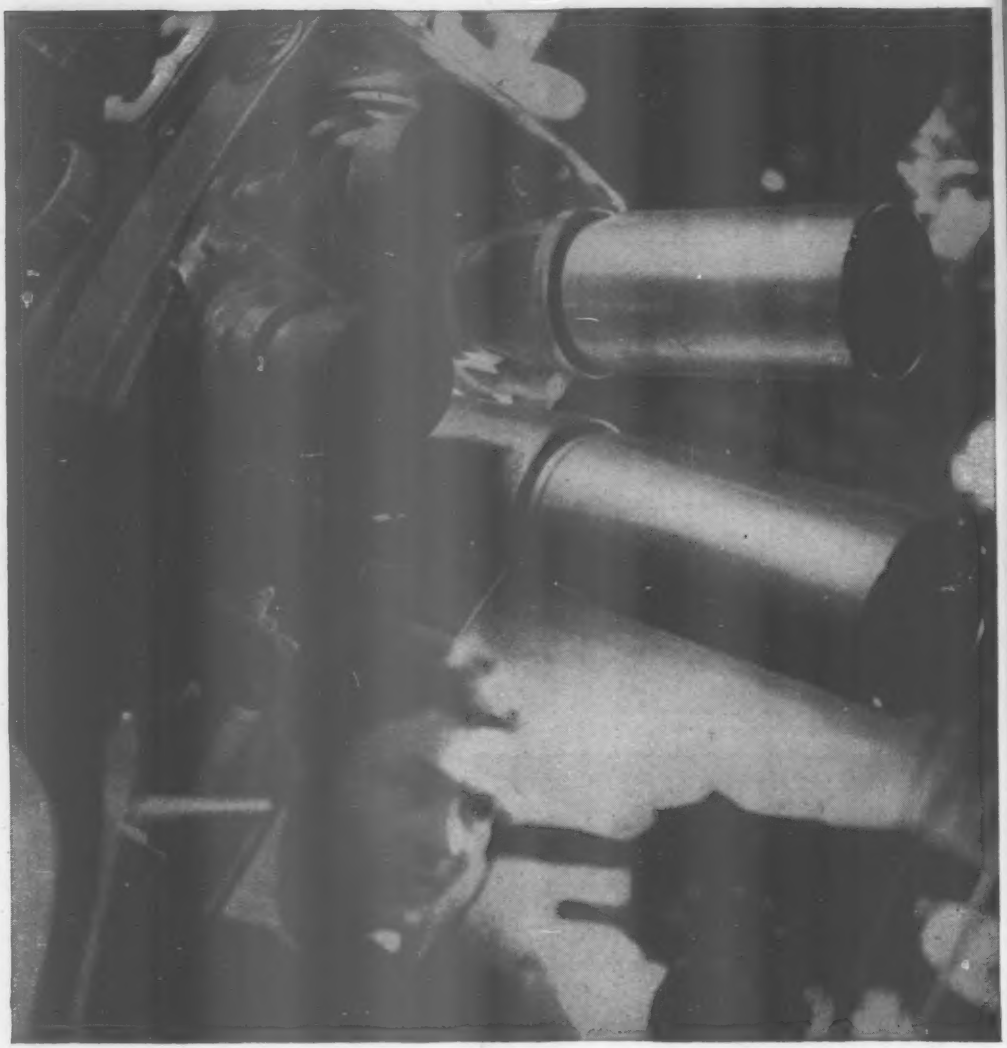

BUILDS COMPLETE STUDIOS

Many countries owe their first glimpse of TV to the resource and enterprise of Pye. Today Pye transmission equipment is used by the television services of more than twenty-eight nations throughout the world. Even in such countries as America and Canada, where television is highly developed and keenly competitive, the Pye product is increasing in demand. The company's pioneering work in the field of TV transmission, and the succession of major developments which they have introduced, have given Pye a place of leadership in the industry.

For full technical details, please write to

PYE TVT LTD., CAMBRIDGE, ENGLAND

CATHODEON

MINIATURE THERMOSTATICALLY CONTROLLED OVEN

ACTUAL SIZE

GENERAL DESCRIPTION

This oven was designed specifically for accurate temperature control of Style "J" Quartz Crystal Units but is ideally suited for other components such as transistors, diodes, thermistors, etc., which are sensitive to ambient temperature variations. Heat control is achieved by a bi-metallic thermal switch. Capacity of the inner shell $\frac{13}{16}$" x $\frac{1}{2}$" x $\frac{13}{16}$" (2.0 x 0.9 x 2.3 cms). Overall dimensions $1\frac{1}{4}$" x $\frac{13}{16}$" x $2\frac{1}{8}$" long (3.2 x 2.0 x 6.6 cms). Weight $1\frac{1}{8}$ oz. (43 grms).

OPERATING DATA

6v or 12v supply. Power consumption 4.6 watts. Temperature settings between 50°C and 85°C. Standard tolerance on setting is ±2°C but ±1°C can be supplied.
Temperature differential over the operating temperature range is within ±2°C of the setting-up temperature. The heating-up time is less than 5 minutes from +20°C to +85°C.

CATHODEON CRYSTALS LIMITED
LINTON CAMBRIDGESHIRE
TELEPHONE LINTON 501 (4 lines)



NEW!

PORTABLE!

LOW DISTORTION

Transistor Oscillator

SOLARTRON

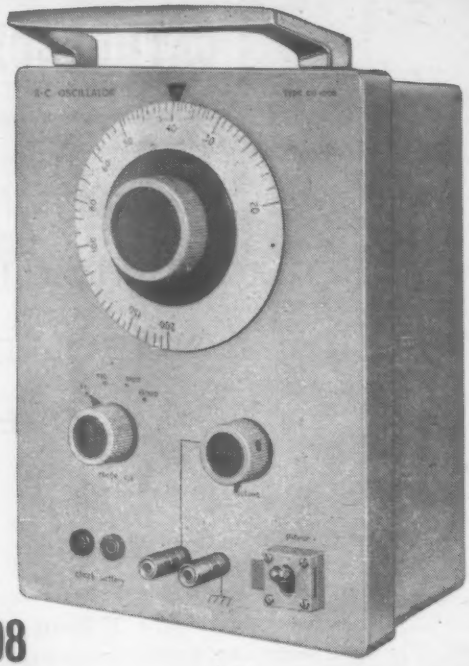

R-C Oscillator CO 1008

- **20 c/s to 200 kc/s, continuously variable**
- **Outstanding Frequency and Amplitude stability**
- **D_{TOT} <0·25% above 100 c/s, D_{TOT} <1% below 100 c/s**
- **Battery powered**
- **Weighs only 4½ lbs (2 kg).**

The new Solartron R–C Oscillator, based on an original design by the Royal Radar Establishment, is fully transistorised and is powered by two internal batteries.
Frequency may be set to an accuracy of ± 5% with fine control dial, and is held to within 0·2% of the set frequency over an 8 hour period.

BRIEF SPECIFICATION

Frequency stability:	0·2% over 8 hour period
Frequency accuracy:	± 5%
Output:	0–1 Volt (loads > 50 kΩ)
	0–0·5 Volt into 600Ω.
Amplitude stability:	± 2% at full output
Zout:	600Ω at full output, > 2 kΩ on any setting
Power requirements:	Two 9V EVER READY PP9
	(or equivalent) batteries.
	3 months battery life, based on
	4 hours/day usage.

Write now for full details: **SOLARTRON LABORATORY INSTRUMENTS LTD.**
COX LANE, CHESSINGTON, SURREY.
Telephone: LOWer Hook 2150 Cables: SOLARTRON CHESSINGTON
Telex: 23842 SOLARTRON T. DIT
A member of the Firth Cleveland Group

Plessey
COMPONENTS
SERVE
THE WORLD
Plessey produces, in large quantities and
competitive prices, a very wide range of radi
TV and electronic components; their applicatio
range from domestic radio and television
advanced sub-miniature electronic equipment an
memory systems.
Plessey components are backed by long exper
ence, exceptional development and environmenta
test laboratories and stringent quality control.
If you need reliable components or are meetin
difficulties in supply, get in touch with Pless
now.
The overseas selling organisation
of The Plessey Group of Companies
PLESSEY INTERNATIONAL LIMITED
ILFORD · ESSEX · ENGLAND
Overseas Telegrams: Plessinter Telex Ilford

PIL/C/2

A*

Make contact with MULLARD EQUIPMENT LIMIT

Mullard Equipment Limited has extensive experience in the manufacture of telecommunications equipment to the stringent standards of performance and reliability demanded for military applications. This wealth of experience has also been applied in the development of the company's civil telecommunications equipment, resulting in a range that sets the highest performance standards and meets all kinds of exacting operational requirements.

Dual-diversity Independent Sideband Receiver—GFR552

This equipment, designed in conjunction with the British Post Office, is used by Communications Authorities throughout the world for long distance point-to-point short wave radio links.

The GFR 552 is capable of receiving independent, single and double sideband transmission over a continuously tunable frequency range of 4 to 30 Mc/s. Automatic frequency control is incorporated and provision is made for 9 crystal channels and variable bandwidth facility.

The equipment is also used extensively for receiving broadcasting signals for subsequent re-broadcast and is suitable for working with dual—and triple-diversity aerial systems.

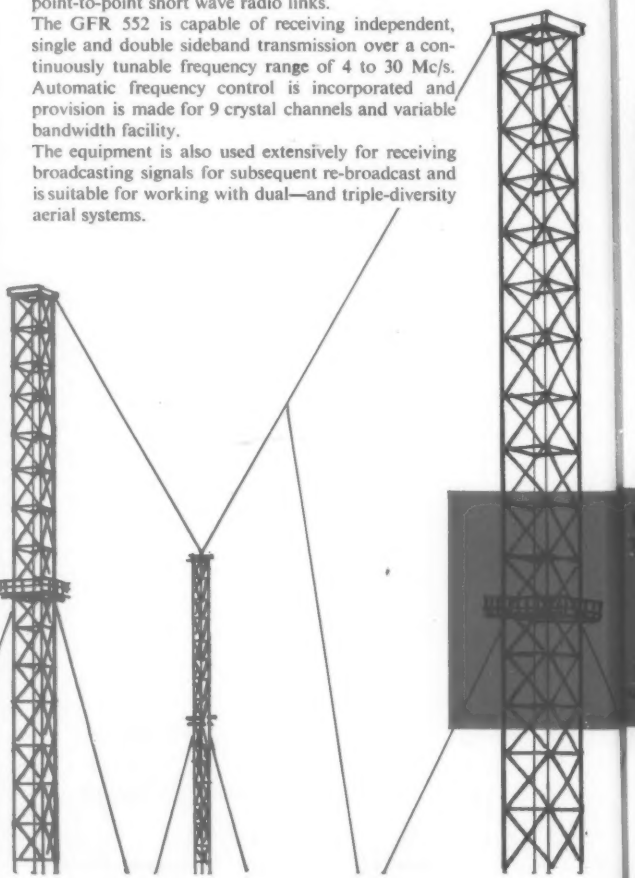

for telecommunications

Mullard Equipment Limited provides a wide range of equipment for both civil and military communications

Low Power HF SSB Radio Telephone SL 55

Compact single unit (including a power pack for 12/24V d.c. or 110/200V a.c.) For fixed or mobile working. The transistorised d.c. power pack gives a low consumption when used from batteries.
The SL 55 has a frequency range of 2—16 Mc/s and its frequency accuracy and stability eliminates the need for a speech clarifier. Provision is made for four crystal channels.

Remote control includes frequency change and the set is also suitable for DSB and CW telegraphy. Available for simplex or duplex operation.

Military VHF/FM Transmitter-Receiver—C 45

Is in service with the UK Army and fully compatible with NATO standards, being hermetically sealed and ruggedised to K 114 standard. Designed for mobile working on 12 or 24V. d.c. giving 15W output over the frequency range 23-28 Mc/s. Available for 100 Kc/s channel spacing (151 channels) or 50 Kc/s channel spacing (301 channels). Operation is extremely simple and no netting procedure is required. Includes facilities for vehicle intercommunication through the control harness which also provides for rebroadcasting and remote control up to 1,000 yds. over a single pair.

VHF Broadcast Link—GME 550

Used by Broadcasting Authorities as either a fixed or mobile unit for outside broadcast work, the GME 550 is a high quality, broad band, FM link consisting of a transmitter and receiver which may be separately installed. Supplied on 19" panels or for mobile installation. There is a choice of frequency ranges; 65-80 Mc/s or 80-100 Mc/s. A.c. and d.c. versions are available; the d.c. power supply unit is transistorised. Facilities are provided for two-way transmission and cueing signals.



HF Command Transmitter SL 56

Versatile equipment which can be employed for a variety of services by the use of alternative drive units such as the C 11 or SL 63. It is continuously tunable over the frequency range 2-24 Mc/s and because of unit construction is suitable for installing in vehicles from the 'Land Rover' upwards. With suitable drive units, the SL 56 provides the following outputs: C W — 1 KW · F S K — 1 KW
R T — AM 300W PM 1 KW SSB 800W PEP.

The SL 56 amplifier units can be supplied in instances where customers have suitable drive units.



Rural Carrier Telephone System—TRC 7

This transistorised carrier telephone system gives up to 7 stackable channels. A separate frequency for each subscriber gives complete privacy on a single exchange pair. The flexibility of the system enables it to be arranged to meet almost any user requirements. It is simple to install, fully tropicalised and has a low power consumption. A.c. or d.c. power supply units are available and the choice of relay sets is compatible with all standard exchange systems.

For details of the full range of telecommunications equipment, write to

MULLARD EQUIPMENT LIMITED

Mullard House · Torrington Place · London WC1 · Tel: Langham 6633

ME666a

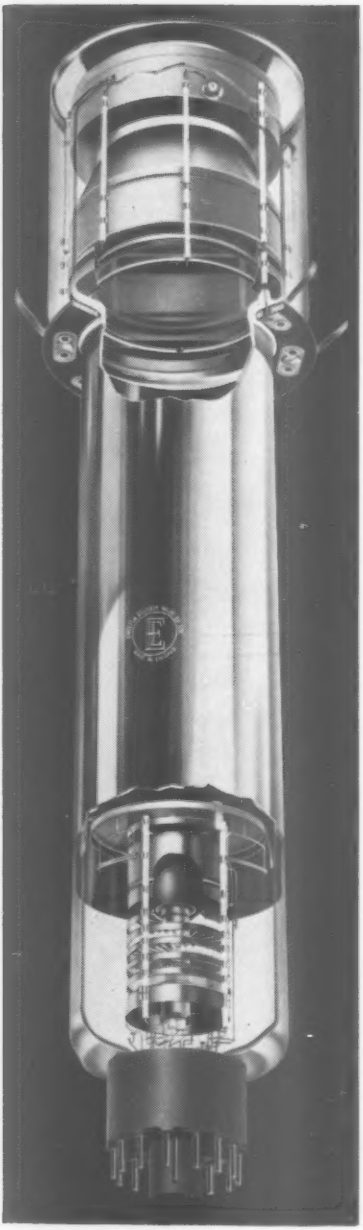

'ENGLISH ELECTRIC'

IMAGE ORTHICONS

Used by all major broadcasting stations throughout the world to provide better picture quality than ever previously attained.

3 in. and 4½ in. tubes for Studio, Outside Broadcast and Medical applications.

Agents throughout the world.

Telephone: Chelmsford 3491

ENGLISH ELECTRIC VALVE CO. LTD.

Chelmsford, England

How Compact is a Capacitor?

What capacitor?

Any capacitor!

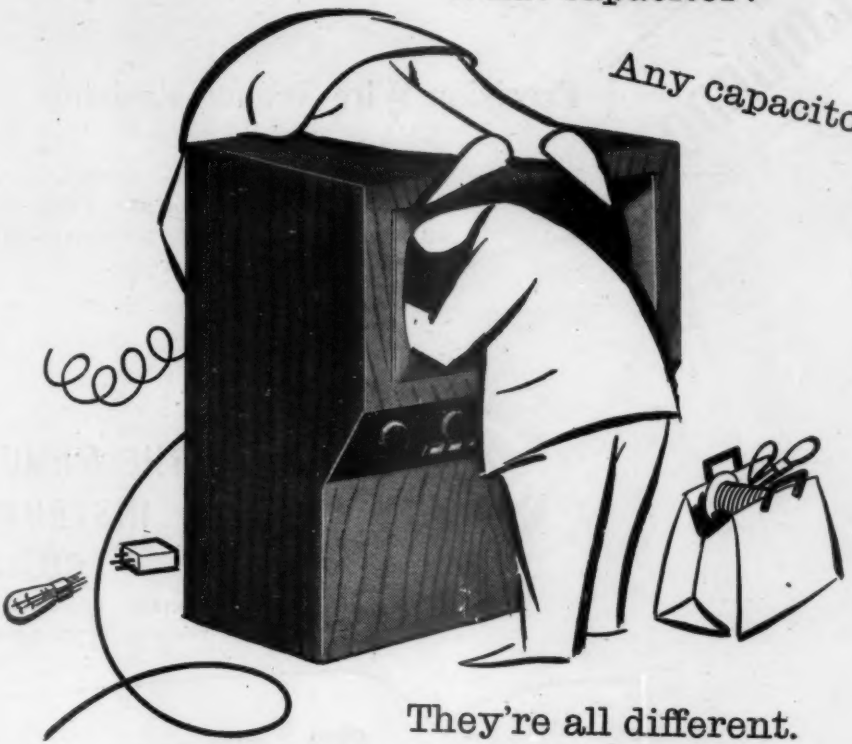

They're all different.

Well, which is the best then?

SUFLEX, of course!

Suflex?

Yes, they're the most reliable because Suflex are Masters of the Empirical Art of Heat Shrinking (for resistance to humid conditions) and Ageing (for stabilization of parameters).

They should be swollen up about all that!

Perhaps, but they're not. In fact they're about the compactest capacitor to be had. We've used them for ages.

Polystyrene capacitors can be made smaller, pF for pF, than any other condenser of comparable performance.

Illustrated:
250 pF. 125 Volt Capacitor.

SUFLEX

SUFLEX LTD. BILTON HOUSE, 54 UXBRIDGE ROAD, EALING, W.5. Tel: EALing 7733

FROM McMURDO

Precision Wire-Wound Resistors

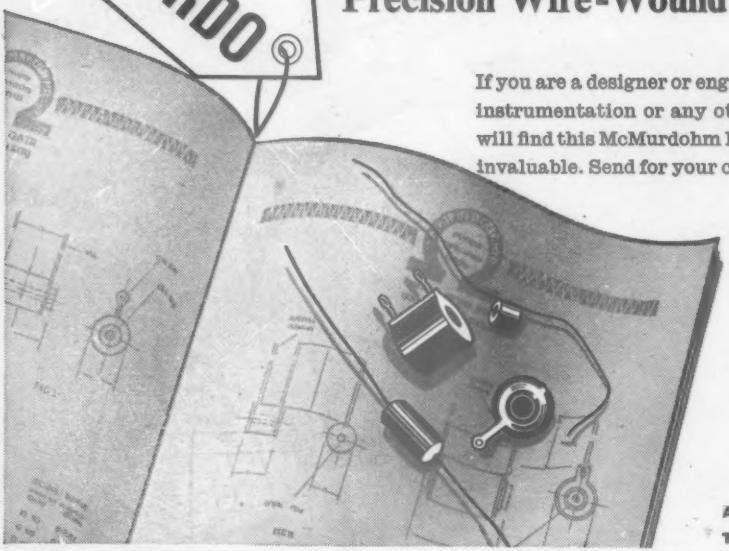

If you are a designer or engineer in computer circuitry, instrumentation or any other field of electronics you will find this McMurdohm Resistor technical catalogue invaluable. Send for your copy.

THE McMURDO INSTRUMENT CO. LTD.

ASHTEAD · SURREY · ENGLAND

Telephone: ASHTEAD 3401

24 WAY CONNECTOR

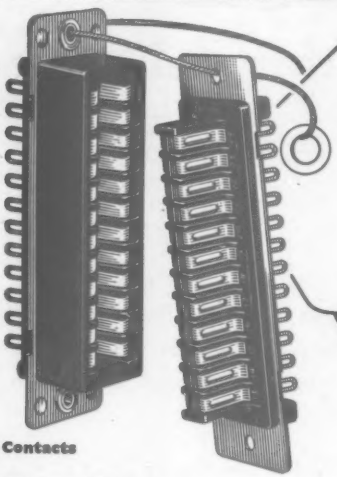

McMURDO *Red Range Connectors*

8 WAY

16 WAY

24 WAY

32 WAY

* Gold plated Contacts
* Nylon loaded P.F. mouldings
* Easy insertion and withdrawal

Send for full technical information to

THE McMURDO INSTRUMENT CO. LTD., ASHTEAD, SURREY Telephone: ASHTEAD 3401

5650

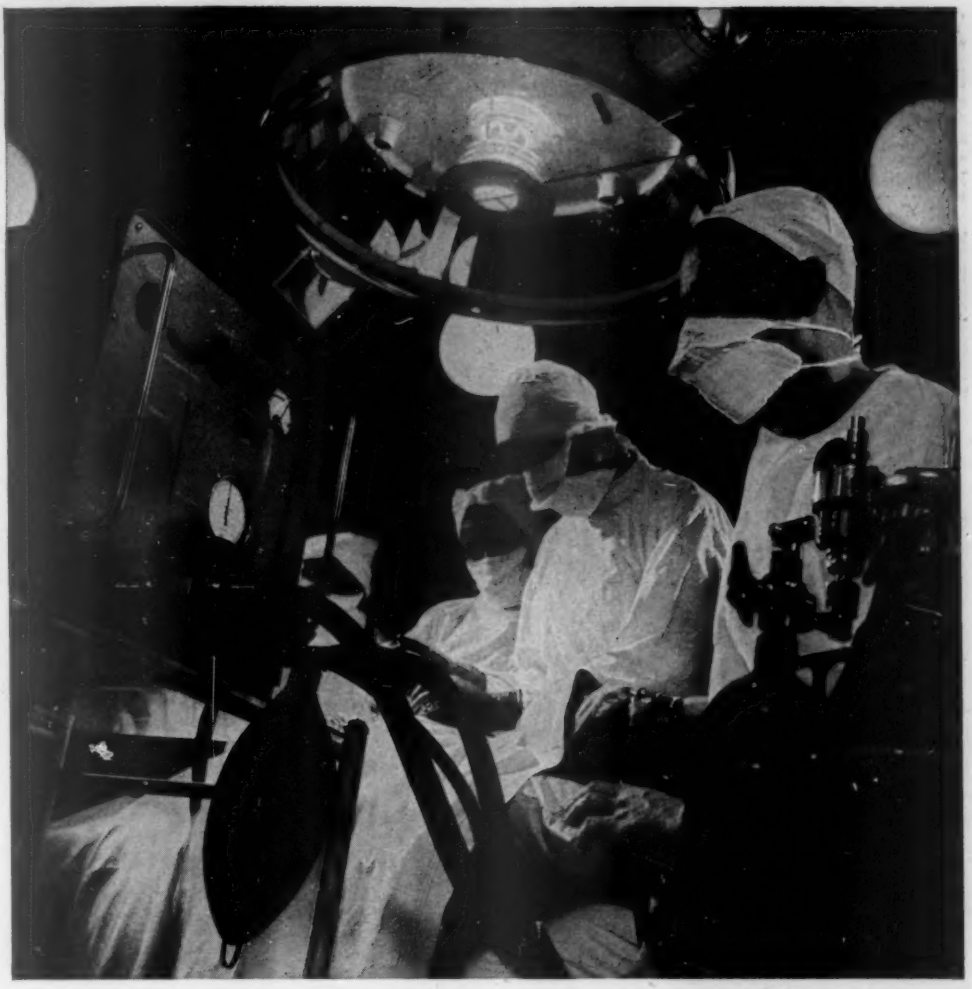

The Electronic Lung

A member of the Pye Instrument Group W. Watson & Sons Ltd. has produced an electronic lung which is capable of replacing an iron lung. The Barnet Ventilator, as the instrument is called, is transistorised and is easily portable in cases of emergency. It is shown here in its application in an operating theatre for the administration of anæsthetics.

The Pye Instruments Group Consists of:

Pye Atomics Division.
Pye Industrial Television Division.
Faraday Electronic Instruments Ltd.
Labgear Ltd.
W. G. Pye & Co. Ltd.
Pye Telecommunications Ltd.
Unicam Instruments Ltd.
W. Bryan Savage Ltd.
W. Watson & Sons Ltd.

PYE

WATSON BARNET ESTABLISHED 1837

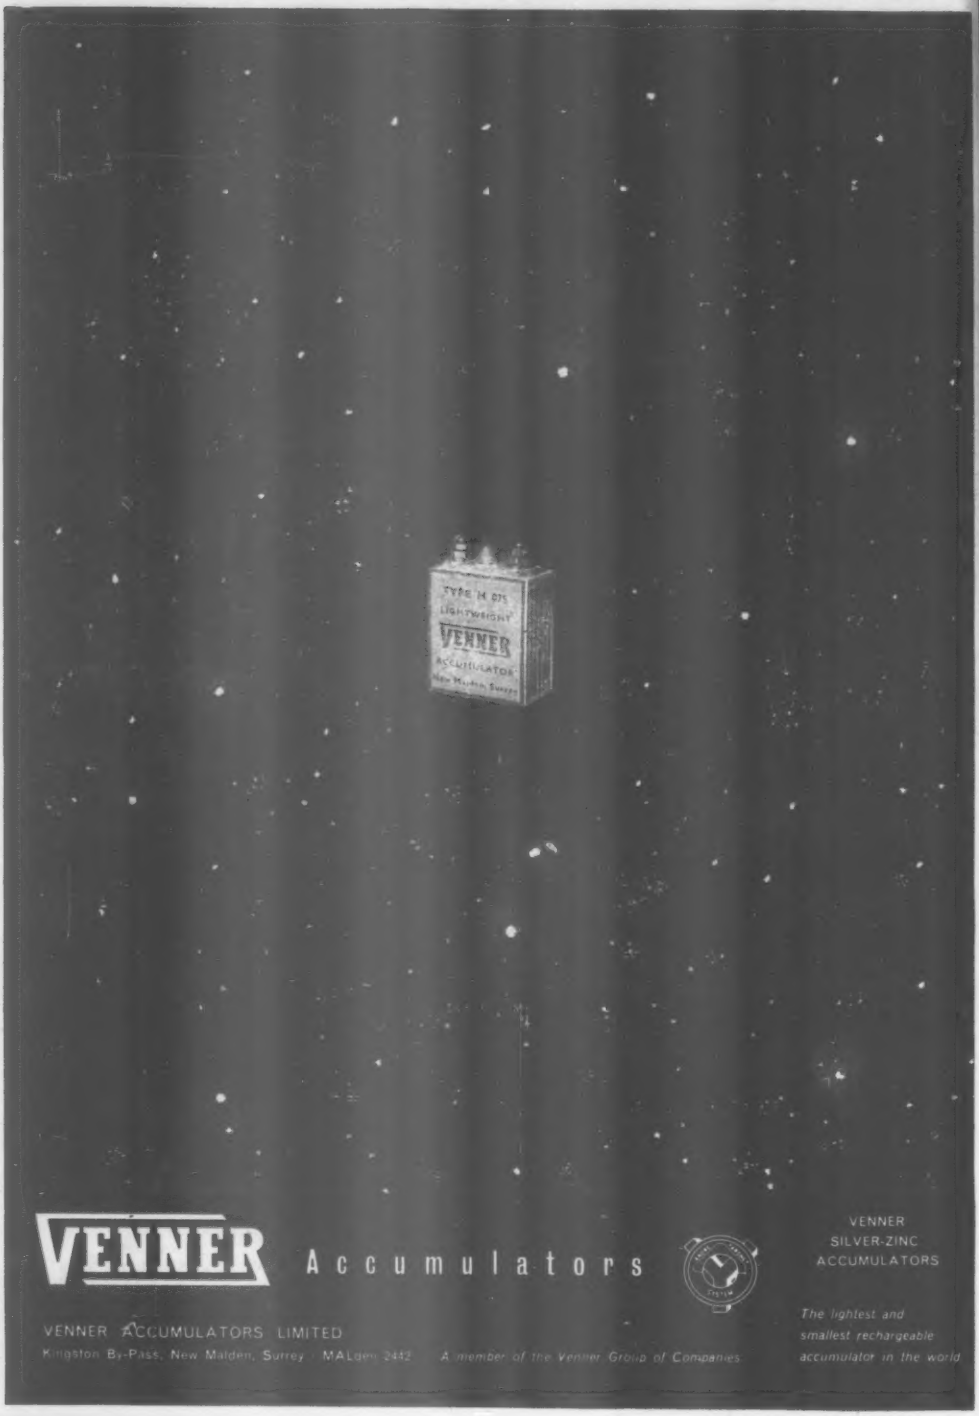

VENNER Accumulators

VENNER ACCUMULATORS LIMITED
Kingston By-Pass, New Malden, Surrey. MALden 2442. A member of the Venner Group of Companies.

VENNER
SILVER-ZINC
ACCUMULATORS

The lightest and smallest rechargeable accumulator in the world

Men in the Know

HAVE THE RIGHT CONTACTS

MAJOR TYPE 'BPO 3000'

The best known and most useful relay available. Spring sets allow from one make or break to 12 change-overs. For minute or heavy switching. Sensitivity down to 20 milliwatts. Adjustable for critical timing, fast or slow operation. Standard or Tropical finish. Special adaptations can be supplied.

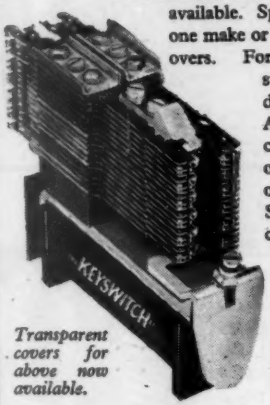

Transparent covers for above now available.

and now PLUG-IN 3000 Type Relays

Plug-in facilities in addition to all the versatility and well-established, reliable features of the world's best known relays.

- ★ Positive contact between male and female pins.
- ★ Contacts: up to 18 light duty or 12 heavy duty.
- ★ Complete transistorized units.
- ★ A.C. or D.C. operation.
- ★ Transparent or metal cover.
- ★ Clip retains relay positively in any position.

SOCKETS AND FITTINGS ARE AVAILABLE FROM STOCK for immediate assembly of units.



PLUG-IN — TRANSISTORIZED UNIT

Operation AC or DC Switching or Signal Current AC or DC 5 to 500 micro-amps. Transfer switching current 10 amps. or 500 v.



MINOR TYPE '600' (Fitted with double pole changeover for 250 volts, 2 amps.)

Ideal for simple switching operations where lightness, compactness and economy are prime considerations. When fitted with contacts similar to those of the "B.P.O. 3000" type it is faster in operation and release.

This relay incorporates 15 amp. Micro Switch; 5 amp. Mercury Switch and standard 0.3 to 8 amp. contacts.



Available free on request, unique calculator providing full relay specifications.

KEYSWITCH RELAYS

SALES MANAGER

2 IRONGATE WHARF ROAD, PRAED ST., LONDON, W.2

Telephone: PADdington 2231

Extremely advantageous quotations can be offered for quantity orders.

Contractors to Home and Overseas Governments and H.M. Crown Agents.

***RELAYS FOR ALL PURPOSES** can be manufactured to customers' requirements for:—*

AUTOMATION
COMPUTERS
BATCHING COUNTING and PHOTO-ELECTRICS
TELEPHONY and INTERCOM SYSTEMS
AUTO-TIMING and AUTOMATIC SIGNALS
MOTOR and MACHINERY CONTROL
CURRENT and VOLTAGE REGULATION, etc.

TRANSFORMERS

All for 240 V Input. Other Supply Voltages as Required
CONTINUOUS RATING. Short Rating Transformers also available



5 V	80 A	... £10
4 V	100 A	... £10
11 V	15 A	... £4
60 V	7 A	... £8
110–120 V	4 A	... £9
18 V	30 A	... £9
6 V	100 A	... £12
24 V	30 A	... £12
30 V	25 A	... £12
55 V	15 A	... £12
5 V	150 A	... £14
110–120 V	10 A	... £15
40 V	25 A	... £17
5 V	300 A	... £20
6–12 V	50 A	... £10
12 V	60 A	... £12
12 V	100 A	... £16
50 V	60 A	... £19
10–15–25 V	100 A	... £28
10–20–30 V	100 A	... £33
110 V centre tapped	25 A	... £19
6–12–18–24–30 V	12 A	... £11

5 V	5,000 A	..... £110
2.5 V	5,000 A	..... £64
4 V	5,000 A	..... £94
2 V	10,000 A	..... £98
3.5 V	20,000 A	..... £127
2 V	30,000 A	..... £130
10 V	700 A	..... £59
10 V	2,000 A	..... £103
10 V	1,000 A	..... £66
10 V	900 A	..... £62
10 V	500 A	..... £38
10 V	300 A	..... £28
20 V	800 A	..... £80
20 V	3,000 A	..... £150
5 V	1,000 A	..... £39
22 V	1,000 A	..... £75
28 V	1,000 A	..... £90



TRANSDUCTORS
SATURABLE REACTORS



Saturable Reactors for controlling AC loads from .5kVA to 300kVA. Available for all standard AC supply voltages, single-phase and 3-phase. Standard DC control volts: 12, 24, 36, 110 and 240 V.

THREE-PHASE TRANSFORMERS



Input 400/440 V.

40 V	50 A 3-phase	£40
230 V	50 A 3-phase	£78
110 V	100 A 3-phase	£90
4 V	5,000 A 3-phase	£130

These and other Transformers can be supplied for 3-phase, 6-phase and 12-phase Rectifiers.



VOLTMOBILE VOLTAGE SELECTOR AUTO-TRANSFORMERS

Range: From 1.6% to 100% of Supply Volts in 64 steps of 1.6%.
ON LOAD SWITCHING.

VOLTMOBILES can be used by themselves or in the primary of another transformer to give very fine changes of output Overvoltage available as extra.

Single Phase Units	240 V	440 V
15 A	£28	£37
30 A	£39	£50
60 A	£69	£81
100 A	£99	£121

D-CMOBILE RECTIFIER SETS

For 240 V AC. The larger outputs are available for 3-phase supply.
Full load DC Volts and Amps are stated.
Prices are without Meters and Regulators.

6 V	15 A	..... £14
6 V	50 A	..... £47
6 V	100 A	..... £66
12 V	10 A	..... £15
12 V	20 A	..... £22
12 V	30 A	..... £28
12 V	60 A	..... £45
12 V	105 A	..... £62
12 V	210 A	..... £83
12 V	1,000 A	..... £185
24 V	12 A	..... £23
24 V	20 A	..... £27
24 V	30 A	..... £33
24 V	60 A	..... £41
24 V	105 A	..... £70
24 V	200 A	..... £86
24 V	750 A	..... £262
36 V	10 A	..... £26
36 V	20 A	..... £32
36 V	40 A	..... £42
36 V	60 A	..... £55
110 V	5 A	..... £32
110 V	10 A	..... £42
110 V	15 A	..... £53
110 V	20 A	..... £67
110 V	25 A	..... £84
220 V	130 mA	..... £15
250 V	6 A	..... £49
250 V	10 A	..... £70
250 V	15 A	..... £89
250 V	20 A	..... £110
1,200 V	225 mA	..... £30



Built in to order—Ammeters—Voltmeters—Rheostats—Stabilising Circuits—Chokes—Variacs.

CARRIAGE EXTRA on all units
SPECIFIC ENQUIRIES are invited for Transformers and Rectifiers. We specialize in HEAVY CURRENT EQUIPMENT.

HARMSWORTH, TOWNLEY & CO.
2 JORDAN STREET, MANCHESTER 15. CENTRAL 5069

AVEL TOROIDS

the most significant development in Audio for 10 years

A new shape:

A NEW STANDARD OF PERFORMANCE IN HIGH FIDELITY AUDIO AMPLIFIERS

The AVEL TOROID DIVISION of Aveley Electric Ltd., now offer the type of transformer which the high fidelity user has been waiting for. The unique properties of the geometry of the toroid, with the latest grain-oriented strip-wound magnetic cores and superior synthetic insulating materials have skilfully been combined to give:

★WIDER BANDWIDTH ★LOWER DISTORTION
★SMALLER SIZE ★LOWEST MAGNETIC FIELD
★HIGHER EFFICIENCY

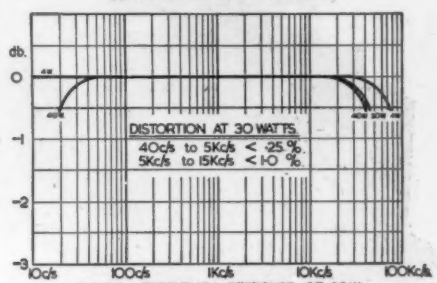

TYPICAL FREQUENCY RESPONSE OF 30 W. AMPLIFIER USING AVEL TRANSFORMER TYPE NO TO30A.



Two TO30A outputs and one TM250A Mains transformers mounted on Stereo twin channel 30-50 watt test amplifier. Two EL34 are used in the output and silicon diodes in the 500 v. 450 mA power supply.



The AVEL TM120D mains transformer and the AVEL TO30D/2 output transformer mounted on a 30 watt Hi-Fidelity power amplifier.

Write for fuller details
TOROID DIVISION

Aveley Electric Limited

P.5973

SOUTH OCKENDON, ESSEX Telephone: SOUTH OCKENDON 3444 Telex: 24120 AVEL OCKENDON

ELECTRO METHODS LTD


HIGH CURRENT SERIES

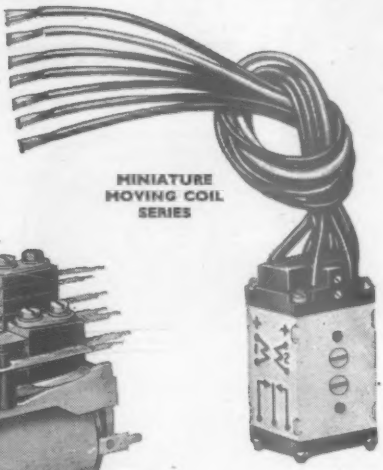
MINIATURE MOVING COIL SERIES

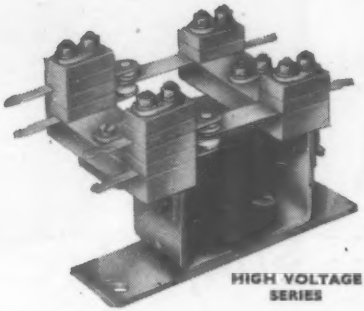
HIGH VOLTAGE SERIES


MINIATURE SERIES


NORMAL DUTY SERIES

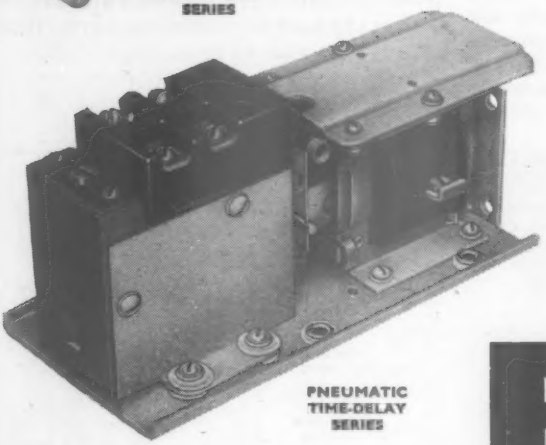
PNEUMATIC TIME-DELAY SERIES

PRECISION RELAYS

Illustrated technical data sent on request:

ELECTRO METHODS LTD., General Products Division, CAXTON WAY, STEVENAGE, HERTS

Telephone: Stevenage 2110-7

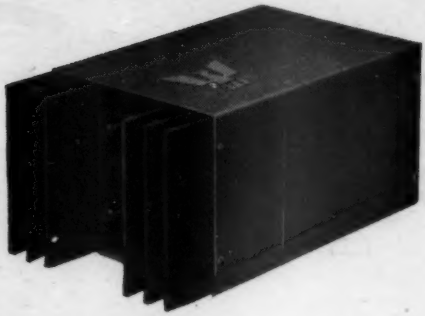

TRANSISTOR *Converters and Inverters*

for fluorescent lighting and general applications.
The range of operating voltages, powers and frequencies is under steady development.

Inverters for fluorescent lighting from 12 volt d.c. supplies cover the range from a single 6" tube to six 24" tubes or equivalent.
Inverters for 12v. d.c. to 50 c/s or 400 c/s a.c. up to 100 W.
Constant frequency and locked frequency inverters for camera and tape recorder operation.
Inverter-rectifier systems for d.c. to a.c. conversion.

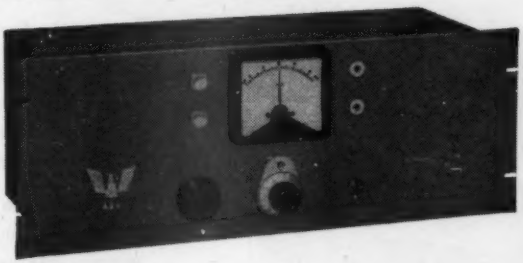

TRANSISTOR *Controller*

Magnetic amplifier intermediate stage, saturable reactor power stage. A temperature controller for use with a platinum resistance thermometer to provide power control up to 60 KW 3-phase. No mechanical switches. Constant current characteristic for platinum furnaces.

THE PHŒNIX TELEPHONE AND ELECTRIC WORKS LIMITED,
THE HYDE, LONDON, N.W.9. *Telephone* COLINDALE 7243

TELECOMMUNICATIONS
PLUGS · LEVER KEYS · CABLES
FUSE MOUNTINGS · AMPLIFIERS
CONTROL PANELS · MOULDINGS
COUNTERS · PLUNGER SWITCHES
MAGNETIC AMPLIFIERS · RELAYS
SATURABLE REACTORS · JACKS
TRANSFORMERS · INSTRUMENTS
CORDS · INTERNAL TELEPHONES
TRANSISTOR INVERTERS · BELLS
PROTECTORS · WIRES · BUZZERS

Advance TC1

1Mc/s TRANSISTORISED COUNTER

it's the inside that counts

. . . in this case up to 1 Mc/s. And the inside of the Advance time and frequency measuring counter type TC1 is rather exceptional. Over 145 transistors and 21 printed circuit boards have been combined in an advanced design to provide the full facilities and high performance expected of a first grade laboratory instrument.

Nett Price in U.K. **£375**

Leaflet Y101 will be forwarded on request.

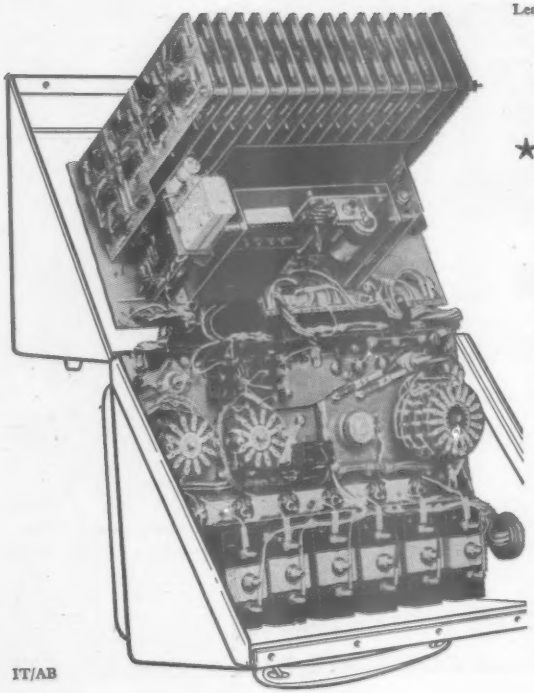

SIX FIGURE DISPLAY	accurate to ±1 count
FREQUENCY MEASUREMENT	from 10 to 1,000,000 c/s
TIME MEASUREMENT	from 1 μsec. to 2,777 hours
★ PERIOD MEASUREMENT	1 or 10 periods of input waveform down to 10 c/s
RANDOM COUNTING	totalling over any period
OUTPUT TIMING PULSES	from 10^{-1} to 10^{6} p.p.s.
INTERNAL STANDARD	oven controlled 1 Mc/s crystal
STABILITY	±1 part in 10^{6} at 25°C
SELF-CHECK FACILITIES	to internal crystal standard
FREQUENCY MEASURING PERIOD	0·1, 1·0 or 10 seconds
REPETITION OF COUNT	manual or automatic
POWER CONSUMPTION	3 W (battery), 14 VA (mains)
DIMENSIONS	length 12in., height 9in., depth 6in., weight 12lb.

★ **AND NOW—Virtually to d.c. with V.L.F. Converter type C.A.1.**

IT/AB

Advance COMPONENTS LIMITED

INSTRUMENTS DIVISION

ROEBUCK ROAD • HAINAULT • ILFORD • ESSEX • TELEPHONE : HAINAULT 4444

Where great things are done with Microwaves

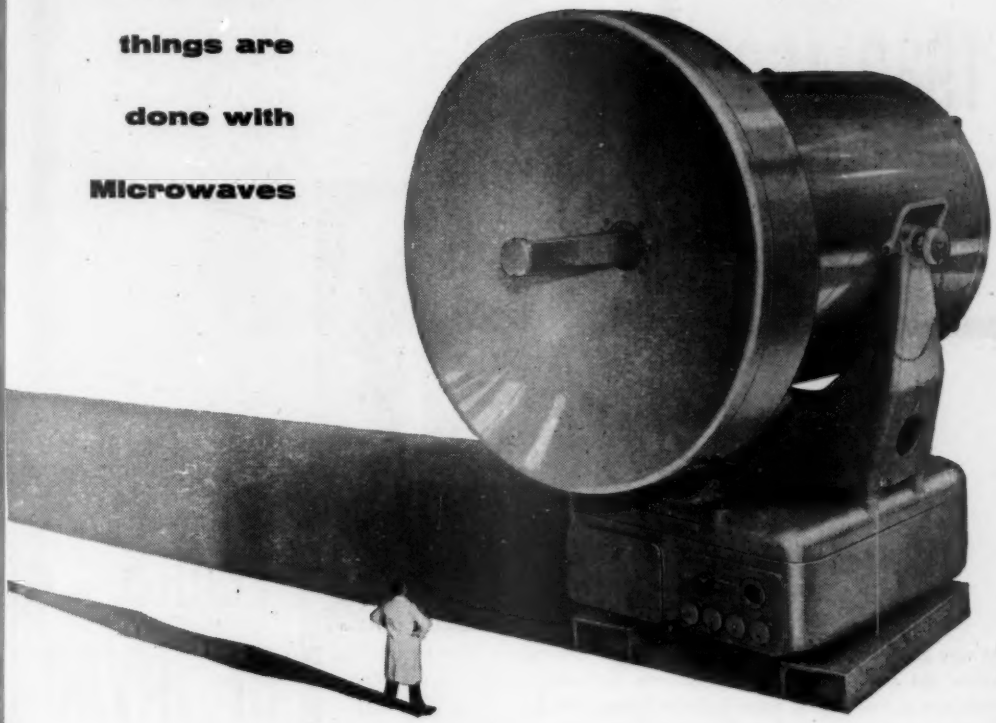

RADAR: Fire Control · Navigation of Aircraft and Small Ships · Automatic Landing · Missile Guidance · Transponders • **COMMUNICATIONS:** Multichannel Radio Links for telemetering Data and Speech • **VALVES:** Klystrons and Magnetrons for 35Gc/s and 75Gc/s bands · Monitor Diodes for 1Gc/s to 35Gc/s • **INSTRUMENTS:** Comprehensive Waveguide measuring circuits covering 6 to 75Gc/s • **RESEARCH:** Outstanding Research and Development of the latest techniques.

ELLIOTT

COMMUNICATIONS DIVISION · RADAR DIVISION · VALVE DIVISION
MICROWAVE & ELECTRONIC INSTRUMENTS DIVISION · RADAR RESEARCH LABORATORY

ELLIOTT BROTHERS (LONDON) LTD

Elstree Way, Borehamwood, Hertfordshire · Elstree 2040
Airport Works, Rochester, Kent · Chatham 4/4400

A MEMBER OF THE ELLIOTT-AUTOMATION GROUP

1939-1960

YEARS OF HIVAC SERVICE

From very small beginnings, Hivac has grown to a company large enough to maintain the highest technical standards for subminiature valves, cold cathode tubes, numicators, neon indicator lamps, filamentary indicator lamps for telephone switchboards and other purposes; and a variety of small, specialised electronic components. The first company in the world to design and manufacture subminiature valves, Hivac now occupies one of the most modern electronics factories in the world. Yet Hivac still remain small enough to maintain a close and personal customer service which is second to none.

TO INDUSTRY

HIVAC LIMITED

HIVAC LIMITED · STONEFIELD WAY · SOUTH RUISLIP · MIDDLESEX

A member of the A.T.E. group

FOR THE FULL APPRECIATION AND ENJOYMENT OF YOUR KIND OF MUSIC...

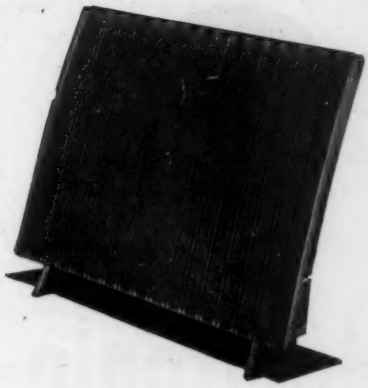

The complete Quad range of matched units comprises:

QUAD 22 Control Unit
QUAD II Amplifier
QUAD Electrostatic Loudspeaker
QUAD F.M. Tuner
QUAD A.M. II Tuner

Send a postcard to Dept., for illustrated leaflet.

QUAD—for the closest approach to the original sound

ACOUSTICAL MANUFACTURING COMPANY LIMITED · HUNTINGDON · HUNTS *Telephone: 361*

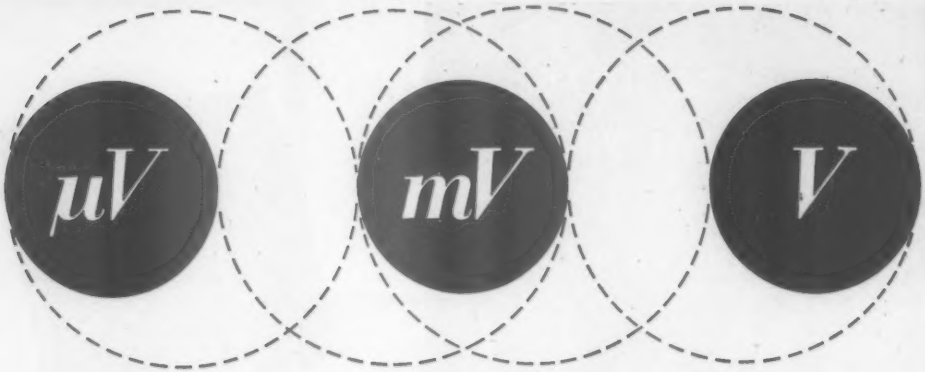

electronic millivoltmeters

internal calibration

It should be noted that all Philips electronic voltmeters contain calibration standards which enable the user easily and rapidly to check, and, if necessary, to re-calibrate his voltmeter at any time without the use of additional instruments.

VHF Voltmeter, type GM 6025

Frequency range: 0.1 Mc/s - 800 Mc/s
flat from 1 Mc/s - 300 Mc/s
−1 dB at 0.1 Mc/s
+1 dB at 800 Mc/s

Measuring range: 10 mV (f.s.d.) - 10 V divided into 7 ranges in a 1-3-10 sequence

Overall accuracy: <5% with respect to full scale

Input resistance: 65 kΩ at 1 Mc/s ; 50 kΩ at 100 Mc/s ; 35 kΩ at 200 Mc/s

Input capacitance: 1 μμF

Replacement of the probe crystal:
the probe crystal can be easily replaced and the instrument rapidly re-calibrated by the user

For measurements on 50Ω -coaxial lines the T-connector, type GM 6050T, can be ordered

PHILIPS *electronic measuring*

Sold and serviced by Philips Organizations all over the world
Sole Distributors in the U.K.: Research & Control Instruments Ltd.,
207 King's Cross Road, London W.C. 1
Overseas enquiries please, to the manufacturers,
N.V. Philips, EMA-Department, Eindhoven, the Netherlands.

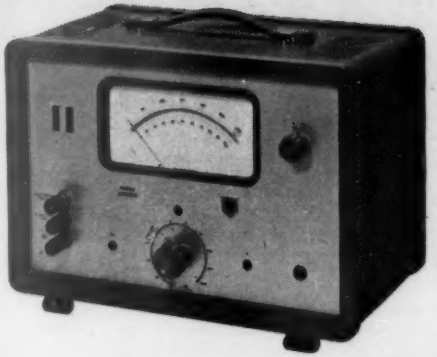

DC Microvoltmeter, type GM 6020

	input I	input II
Measuring range:	100 μV (f.s.d.) - 10 V in 11 steps	10 mV (f.s.d.) - 1000 V in 11 steps
Input impedance:	1 MΩ (± 1.5%) in parallel with 20 μμF	100 MΩ (± 1.5%) in parallel with 10 μμF
Overall accuracy:	with respect to full scale ± 3%	
Pre-deflection:	< 5 μV	
Drift:	1 μV per hour after 1 hour of warming-up	

Automatic polarity indication
DC currents may be measured directly from 100 μμA (f.s.d.) up to 10 μA

L F Millivoltmeter, type GM 6012

Frequency range:	2 c/s - 1 Mc/s
Measuring range:	1 mV (f.s.d.) - 300 V in 12 steps
dB scale:	−80 dB up to +52 dB (0 dB = 1 mW into 600 Ω)
Input impedance:	4 M Ω in parallel with 20 μμF (up to 3 V); 10 M Ω in parallel with 10 μμF (in the other ranges)
Overall accuracy:	with respect to full scale ± 2.5%, 5 c/s - 100 kc/s ± 5%, 2 c/s - 1 Mc/s
Pre-deflection:	< 100 μV

HF Millivoltmeter, type GM 6014

	without pre-attenuator	with pre-attenuator
Frequency range:	1 kc/s-30 Mc/s	10 kc/s-30 Mc/s
Measuring range:	1 mV (f.s.d.) - 300 mV in 6 steps	100 mV (f.s.d.) - 30 V in 6 steps
dB scale:	−80 dB up to -8 dB	−40 dB up to +32dB
Damping at 10 kc/s:	1 MΩ	50 MΩ
1 Mc/s:	700 k Ω	10 MΩ
30 Mc/s:	50 k Ω	2 MΩ
Input capacitance:	7 μμF	2 μμF
Pre-deflection:	compensated by electrical zero setting	

Variations of the frequency characteristic:
< 5% over the whole range, with respect to the response at the frequency of the calibration voltages

Overall accuracy: ± 3% with respect to full-scale and with reference to the frequency characteristic

instruments: quality *tools* for industry and research

PHILIPS

DOUBLE ENDED STAINLESS STEEL VACUUM OVENS

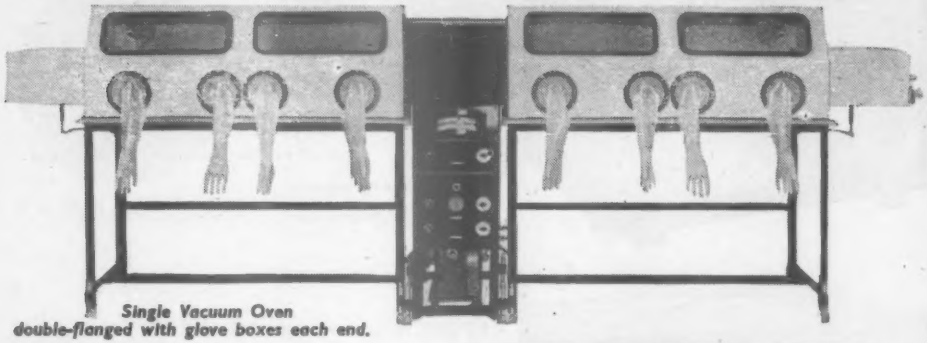

Single Vacuum Oven double-flanged with glove boxes each end.

- ★ Made throughout in polished stainless steel.
- ★ Single action door openings.
- ★ Rectangular with shelf spacings to suit.
- ★ Double ended controls.
- ★ Electrical interlocking of air inlet and isolation valves.
- ★ Outer cover hermetically sealed.
- ★ Temperature range 0°-300°C or equivalent F.
- ★ Temperature Control: Normal ±7½°C. Special ±1C.
- ★ Internal Spacing 7in. x 8in. x 18in. (can be altered to special requirements).
- ★ Vacuum Range: To 10-4.
- ★ Respective Vacuum Gauges incorporated.
- ★ Automatic air inlet valve on Backing Pump.
- ★ Visual indicators and fuses on all switches.
- ★ Flanged for fitting into Dry Box.

View showing automatic interlocking of unloading compartment on glove box.

Vacuum Oven with glove box.

We design and manufacture Ovens to Customers' special requirements. Should you have any problems in this field our Technical Department is always willing to help you solve them.

Vacuum Ovens with temperatures of up to 600°C are also manufactured by us on similar lines but with Sectional Heating and Water-Cooled Ends.

VACWELL ENG. CO. LTD.

VACWELL ENGINEERING CO. LTD.

WILLOW LANE, MITCHAM, SURREY

Phone: MITcham 8211 (3 lines)

Both you and the racing driver would agree that all circuits have their own characteristics and problems . . . . . .
but for *you*, when selecting a valve for all round optimum performance . . . . . .
better make it BRIMAR

BRIMAR LIMITED FOOTSCRAY SIDCUP KENT FOOTSCRAY 3333

BVA

B

PAINTON Miniature Vitreous Wirewound Resistors

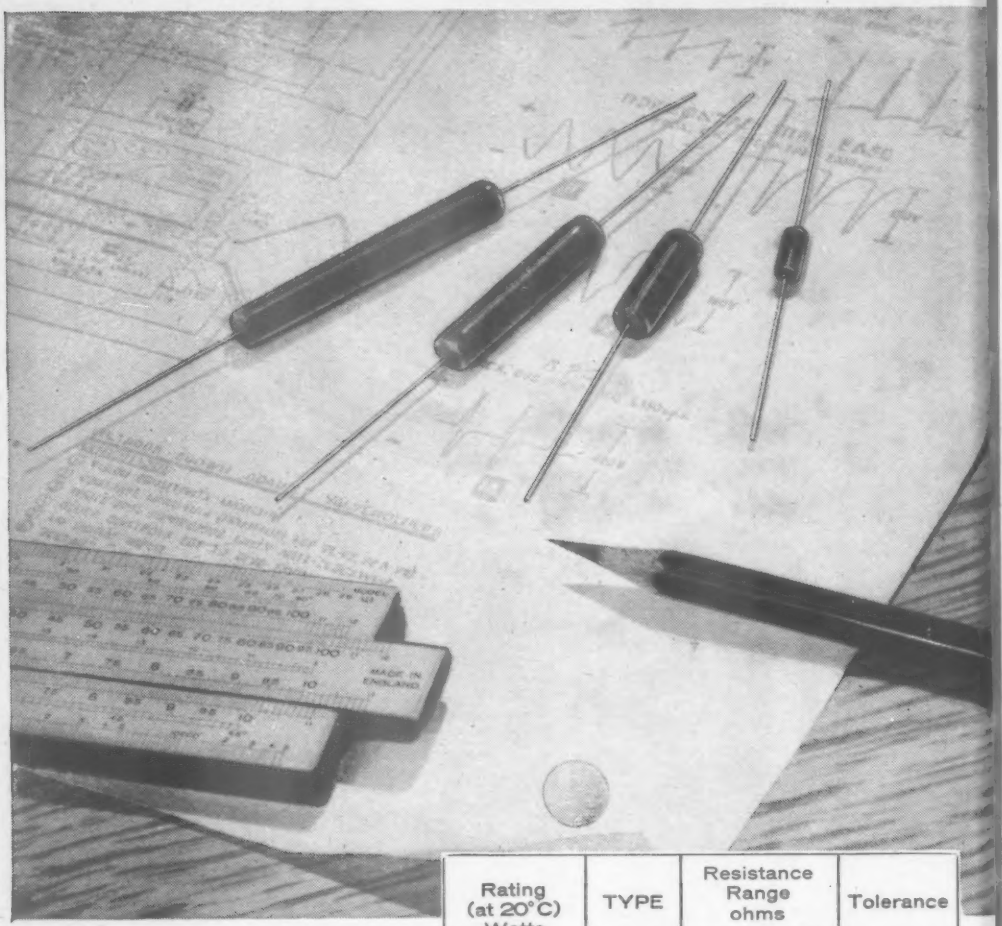

Rating (at 20°C) Watts	TYPE	Resistance Range ohms		Tolerance
		Min	Max	
4	MV1A	1 10	9·9 6,800	10% 5%
7	301A	2	68,000	5%
10	302A	4	140,000	5%
5	306A	1	33,000	5%

Protected by Patent Nos. 626128 & 575279

PAINTON

★ **Fully Type Approved to RCS 111**
★ **Top Quality** ★ **Quick Delivery**
★ **Competitive Prices**

Always specify Painton Wirewounds

Painton & Co. Ltd.
KINGSTHORPE NORTHAMPTON
Tel: 34251 (10 Lines) Telegrams: 'Call Northampton'.
Telex: 31576

SALFORD new Type R

PANEL MOUNTING INSTRUMENTS

2"-2½"-3½"-5"



2" TYPE R

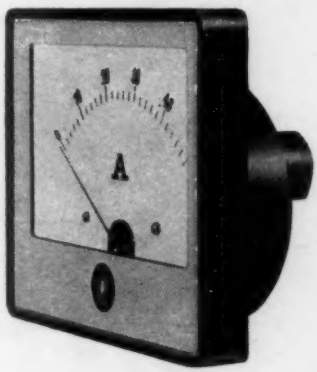

2½" TYPE R

A unique feature of this new range is the front plate of anodised aluminium, supplied in any colour to match surrounding apparatus. The case, of clean rectangular styling is moulded in phenolic material, and fixing is easy and adaptable.
Instruments can be supplied for the measurement of all A.C. and D.C. currents and voltages.
The legibility of the scale is exceptional and all unnecessary markings have been eliminated. Scales are white enamelled on metal with black markings.

MOVING COIL TYPE
MOVING COIL WITH RECTIFIER
MOVING COIL WITH THERMO COUPLE
MOVING IRON TYPE

Send for leaflets today

SEI

SALFORD ELECTRICAL INSTRUMENTS LTD.
PEEL WORKS, SILK STREET, SALFORD 3, LANCASHIRE. Tel: Blackfriars 6666
London Sales Office: Magnet House, Kingsway, W.C.2. Tel: Temple Bar 4666
A Subsidiary of THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

tested to withstand overloads of 10 times nominal value !

We've come a long way since the crystal set era.
V.H.F., frequency modulation, stereo, big screen television — constant developments in the air create a constantly growing market. It pays to advertise to this market on television — a fact endorsed by the dealer himself.
In a recent survey commissioned by Associated-Rediffusion, dealers mentioned television as being more successful than any other medium in helping them sell more television sets. In addition, more and more people are buying replacement television sets on styling. There is no better medium than television for actually demonstrating your model or a particular feature of its design.

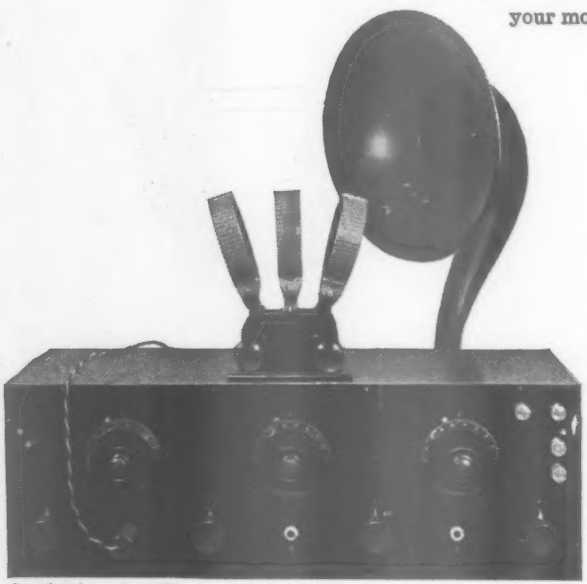

An early valve receiver, 1923.

Look at the size of the replacement market for television sets in the London area covered by Associated-Rediffusion. Nearly *half* of the homes viewing Independent Television have sets three years old or more. The following table shows the breakdown in detail.

	AGE OF PRESENT SET	TOTAL
Base of %-No. of informants		2068
Percentage who had present television set	Three years	14%
	Four years	12%
	Five years or more	18%

There is no better medium than television for driving home your sales message in the face of increasing competition. Manufacturers of all electrical goods advertising on Associated-Rediffusion can reach over 8 million people in their homes, in London. This represents a prosperous mass market in an area where there is a huge replacement trade waiting to be developed. Advertise on television in London— on Associated-Rediffusion.

The above figures are quoted from the London Viewership Survey No. 4, commissioned by Associated-Rediffusion. John Talbot (HOLborn 7888) will be pleased to let you have full details.

LONDON

ASSOCIATED-REDIFFUSION

London's Television, Monday to Friday

Television House, Kingsway, London, W.C.2. Tel: HOLborn 7888
also Norfolk House, Smallbrook, Ringway, Birmingham 5. Tel: Midland 9151/2
and Peter House, Oxford Street, Manchester 1. Tel: Central 9967/8

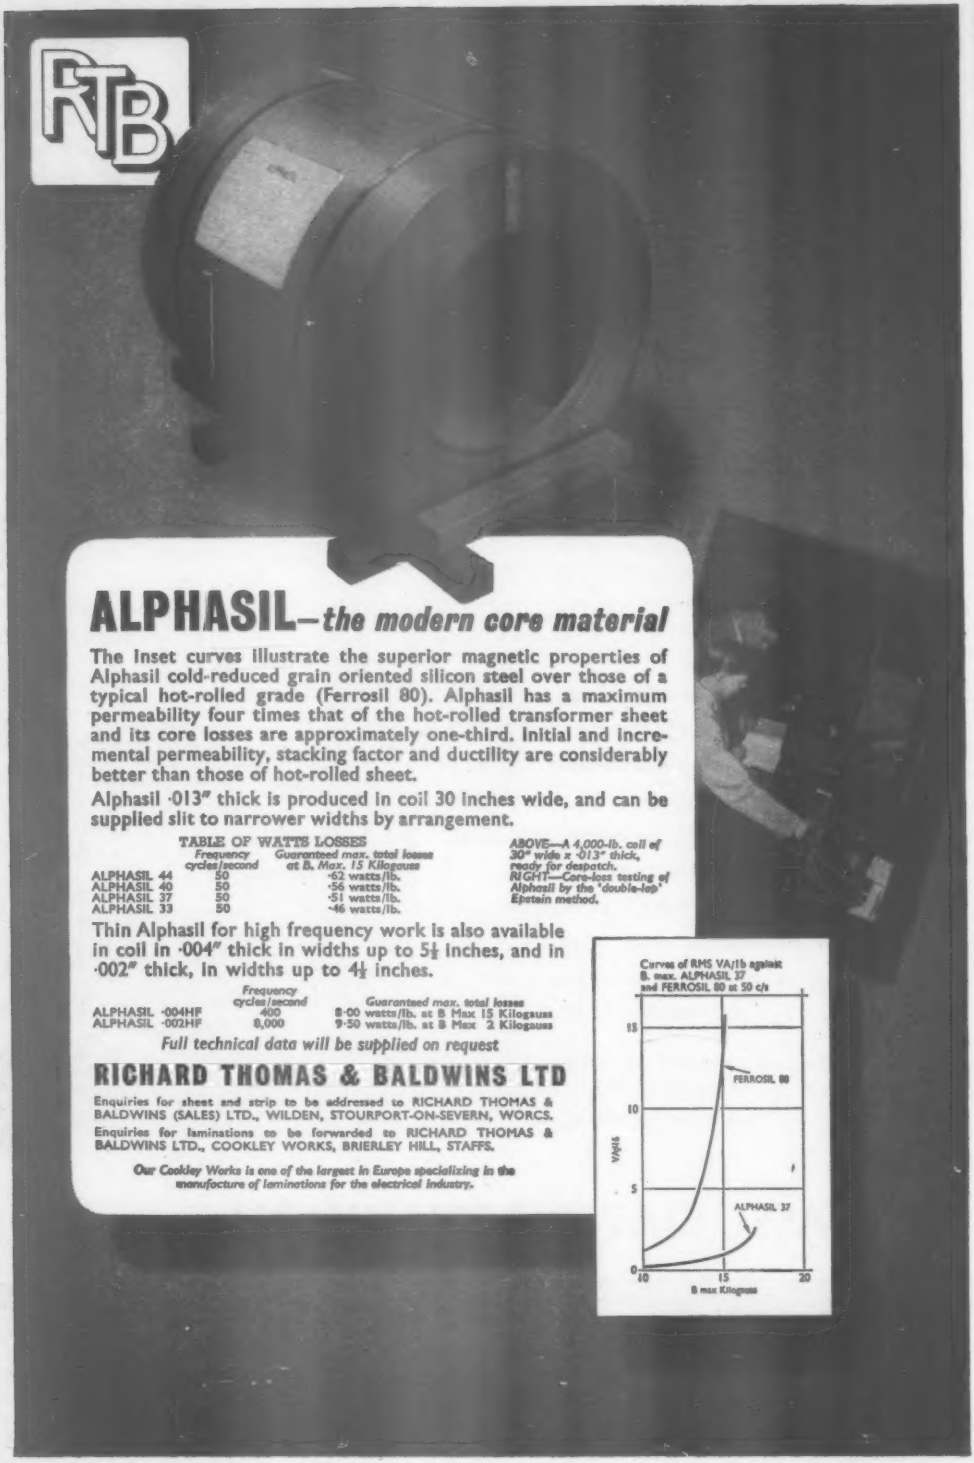

RTB

ALPHASIL—*the modern core material*

The inset curves illustrate the superior magnetic properties of Alphasil cold-reduced grain oriented silicon steel over those of a typical hot-rolled grade (Ferrosil 80). Alphasil has a maximum permeability four times that of the hot-rolled transformer sheet and its core losses are approximately one-third. Initial and incremental permeability, stacking factor and ductility are considerably better than those of hot-rolled sheet.

Alphasil ·013″ thick is produced in coil 30 inches wide, and can be supplied slit to narrower widths by arrangement.

TABLE OF WATTS LOSSES

	Frequency cycles/second	Guaranteed max. total losses at B. Max. 15 Kilogauss
ALPHASIL 44	50	·62 watts/lb.
ALPHASIL 40	50	·56 watts/lb.
ALPHASIL 37	50	·51 watts/lb.
ALPHASIL 33	50	·46 watts/lb.

ABOVE—A 4,000-lb. coil of 30″ wide x ·013″ thick, ready for despatch. RIGHT—Core-loss testing of Alphasil by the 'double-lap' Epstein method.

Thin Alphasil for high frequency work is also available in coil in ·004″ thick in widths up to 5½ inches, and in ·002″ thick, in widths up to 4½ inches.

	Frequency cycles/second	Guaranteed max. total losses
ALPHASIL ·004HF	400	8·00 watts/lb. at B Max 15 Kilogauss
ALPHASIL ·002HF	8,000	9·50 watts/lb. at B Max 2 Kilogauss

Full technical data will be supplied on request

RICHARD THOMAS & BALDWINS LTD

Enquiries for sheet and strip to be addressed to RICHARD THOMAS & BALDWINS (SALES) LTD., WILDEN, STOURPORT-ON-SEVERN, WORCS.

Enquiries for laminations to be forwarded to RICHARD THOMAS & BALDWINS LTD., COOKLEY WORKS, BRIERLEY HILL, STAFFS.

Our Cookley Works is one of the largest in Europe specializing in the manufacture of laminations for the electrical industry.

Compact

SPEAKER SYSTEMS

WITH CLEAN BASS

In each of these models L.F. output is produced by a 12in. unit type WLS/12 fitted with a soft fibrous cone for smooth response. The special roll surround permits large distortion-free excursions with fundamental resonance below 25 c/s.



WLS/12

W2

A two-speaker model complete with treble volume control.
Cabinet size 23½ × 14 × 12in.
Weight 37 lb. complete.
Impedance 15 ohms.
Max. input 15 watts.
£29/10/- complete, tax free.

W3

A three-speaker system complete with midrange and treble volume controls.
Cabinet size, 28 × 14 × 12in.
Weight 48 lb. complete.
Impedance 15 ohms.
Max. input 15 watts.
£39/10/- complete, tax free.

W4

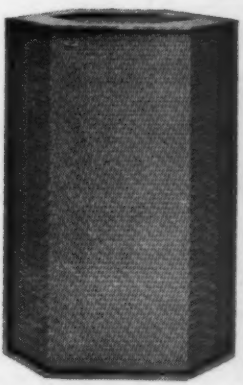

A four-speaker system complete with mid-range and treble volume controls.
Cabinet size 35 × 24 × 12in.
Weight 65 lb. complete.
Impedance 15 ohms.
Max. input 15 watts.
£49/10/- complete, tax free.

Each model is available in choice of walnut, oak or mahogany veneers. Also available in whitewood slightly cheaper. Tropical models with resin-bonded plywood approximately £2 extra.

Catalogue giving full technical details, response curves and oscillograms of the above models available on request.

Wharfedale
WIRELESS WORKS LTD

IDLE BRADFORD Yorkshire

Telephone : Idle 1235/6 Telegrams 'Wharfdel' Idle, Bradford.

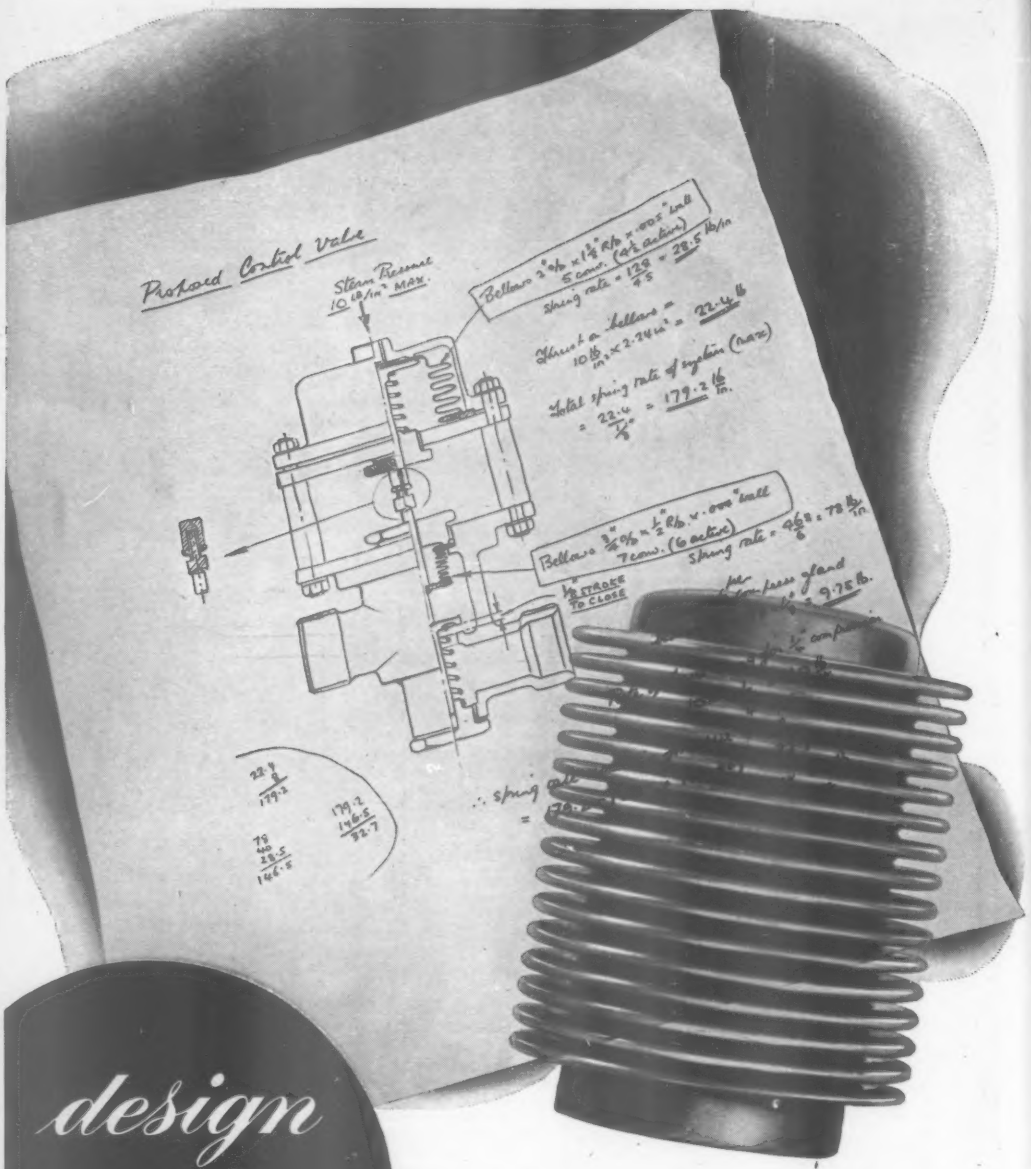
Proposed Control Valve
Steam Pressure
10 lb/in² MAX.
Bellows 2"o/d × 1½"o/d × .005" wall
5 conv. (4½ active)
Spring rate = 128/4.5 = 28.5 lb/in
Thrust on bellows =
10 lb/in² × 2.24 in² = 22.4 lb
Total spring rate of system (max)
= 22.4/½" = 179.2 lb/in.
Bellows 3"/4"o/d × ½"h × .005" wall
7 conv. (6 active)
Spring rate = 45/6 = 7.5 lb/in
½" STROKE TO CLOSE
per compression gland
½" = 9.75 lb.
½" compression
22.4/2 = 179.2
179.2 − 146.5 = 32.7
79 − 50 = 29.5
146.5

design with bellows

If your problem is the design of Thermostatic or pressure sensitive systems, small shaft couplings, pressure seals or vacuum seals, then the versatile metal bellows will provide the solution. HYDROFLEX are, of course, to be preferred. Please write to the Bellows Division for your copy of the catalogue, quoting reference "WW".

DRAYTON REGULATOR & INSTRUMENT CO. LTD.
West Drayton, Middlesex. *West Drayton 4012*

HYDROFLEX

DIGITAL VOLT-OHM DVOM METER

A fully transistorized instrument of exceptional versatility featuring in-line readout, with polarity, decimal point and quantity clearly displayed.

FEATURES...

Accurate measurement of resistance and A.C. and D.C. voltage. Can equally well be used as a counter. May be used as the basis of a data logging system. Outputs available for direct connexion to Venner printer.

BRIEF SPECIFICATION...

D.C. voltage 1mV to 1100 V. Accuracy ± 0.1% of full scale.
A.C. voltage 1mV to 1100 V. Accuracy ± 0.25% of full scale.
Resistance 1Ω to 1.1MΩ. Accuracy ± 0.25% of full scale.

DVOM uses well-tried Venner packaged circuits, making for reliability in use and ease in servicing. Stepping switches, relays and need for frequent calibration have all been eliminated.

DVOM has been developed by Venner Electronics in collaboration with Epsco Incorporated of Boston U.S.A.

See it on Stand No. 19 at the Physical Society Exhibition 16th - 20th January.

VENNER

VENNER ELECTRONICS LIMITED
Kingston By-Pass, New Malden, Surrey. MALden 2442

STORAGE TUBES

'ENGLISH ELECTRIC'

FIRST AGAIN IN BRITAIN

The English Electric Valve Co., consistent with their policy of keeping in the forefront with new electronic devices, have recently enlarged considerably their Storage Tube Division. Increased facilities and effort are being applied to the development and production of a number of Storage/Memory Tubes, two of which are illustrated, and enquiries are invited for special types to meet individual requirements.

E702 Direct-view Storage Tube has a useful screen diameter of 4 inches and information can be displayed at high brilliance (2350 foot-lamberts) for one or two minutes. The persistence can be controlled for 10 minutes or more, or the display can be completely erased in 300 milliseconds.

E704 Island Storage Tube will store about 500 bits of information and is designed for analogue and digital storage and for radar data handling applications, where it gives improved signal to noise ratio. The electrical input and output may be applied or taken out at the same or at different rates; the two processes may be simultaneous or sequential.

Full details of these and other EEV Storage Tubes will be sent on request.

AGENTS THROUGHOUT THE WORLD

ENGLISH ELECTRIC VALVE CO. LTD. *Chelmsford, England*
Telephone: Chelmsford 3491

AP149

a complete range of electrolytic capacitors . . . . .

. . . geared to the needs of the electronics industry

A range of capacitors, sufficient to meet practically every general need, plus an extensive research and development programme that keeps us abreast of a rapidly expanding industry. A programme that enables the Swindon Condenser Company to offer constantly up-to-date information and undertake the design of special capacitors to meet individual requirements.

S

SWINDON CONDENSER COMPANY LIMITED

Industrial Estate, Swindon, Wiltshire
Telephone: Swindon 6751-2-3

TEST CARD 'C' all day – every day

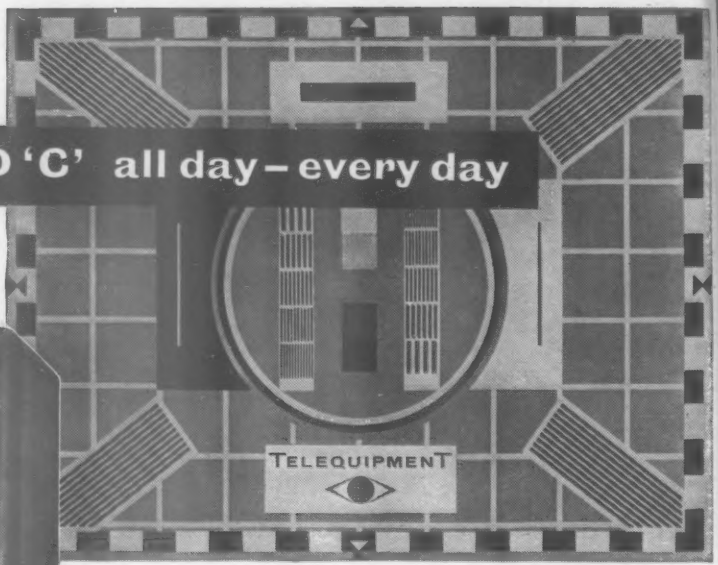

For efficient full scale servicing—
the Telequipment Monoscope
test card generator.

★ **C.C.I.R. standard.**
★ **Video response to 6 Mc/s.**
★ **Crystal controlled transmitters.**
★ **Rated for continuous operation.**
★ **Prices from £570.**

TELEQUIPMENT



For the smaller user—
Telequipment WG44
portable waveform
generator at **£62.**

Telequipment Limited, 313 Chase Road, Southgate, London, N.14. Telephone: Fox Lane 1166

MODEL 5G-5"
MODEL 6G-6½"
MODEL 58C-8"x5"
MODEL 8C-8"

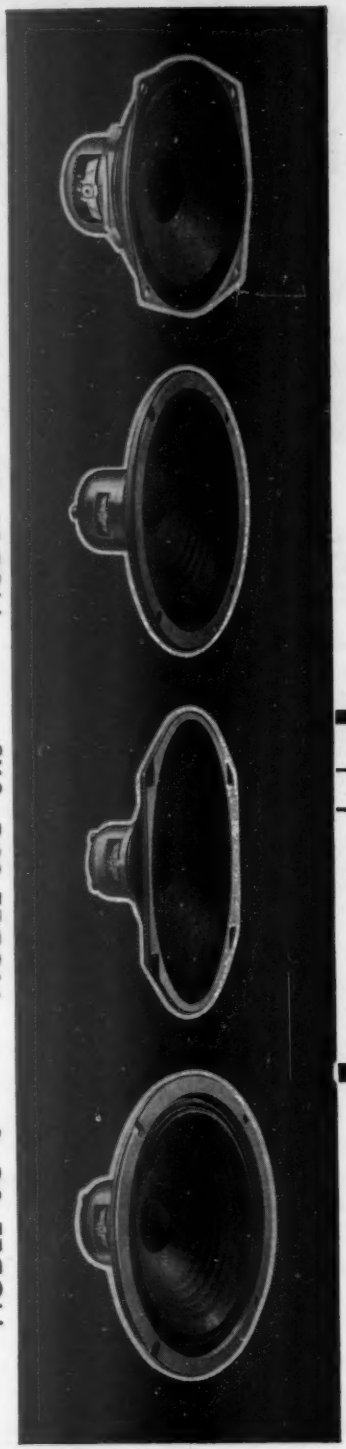

POPULAR REPLACEMENT SPEAKERS

For the guidance of the trade and public we publish below a list of the most popular ELAC replacement loudspeakers.

We have made this selection from our wide range of speakers as they cover practically all the requirements of the replacement trade.

The new prices are now operative.

POPULAR REPLACEMENT MODELS

Type	Ref	Flux	Retail Price	Purchase Tax
5in.	5G	6500 g	20/6	6/7
6½in.	6G	6500 g	21/6	6/11
7 x 4in.	47G	6500 g	20/6	6/7
7 x 3in.	37G	6500 g	20/6	6/7
8 x 3in.	38G	6500 g	20/6	6/7
8 x 5in.	58C	8500 g	24/6	7/10
8in.	8C	7000 g	25/6	8/2

All loudspeakers have Standard 3 Ohm impedance. Higher impedances can be supplied at an extra cost of 3/- plus 1/- Purchase Tax.

Please write for leaflets and further details.

ELAC

ELECTRO ACOUSTIC INDUSTRIES LIMITED

Stamford Works, Broad Lane, Tottenham, N.15 Tel: TOTtenham 0505

FOR INSTRUMENT TUBES

check with the

ETEL range

TUBE	1CP31 Monitor	3AFP31 General Purpose	3AZP31 Double Gun *	3BLP31 Transistor Driven	4EP31 General Purpose	4LP31 Split Beam	5BKP31 Helical P.D.A.	5BUP31 General Purpose	5BVP31A High Writing Speed	5CLP31 High Sensitivity
V_{a1} ..... (kV)	0.5	1.0	1.5	0.3	2.0	1.5	1.4	2.0	1.5	1.5
V_{a3} ..... (kV)	0.5	1.0	1.5	0.3	2.0	1.5	1.8	2.0	4.0	1.5
V_{a4} ..... (kV)	—	—	—	1.5	4.0	3.0	4.0	4.0	8.0	15
V_{a5} ..... (kV)	—	—	—	—	—	—	10	—	—	15
Y scan ..... (mm)	28	55	70	50	80	75	60	95	95	60
Y sensitivity ..... (V/cm)	45	11.5	16	3.0	23	27	12.5	17.5	35	2.7
X scan ..... (mm)	28	55	90	70	90	90	95	115	115	100
X sensitivity ..... (V/cm)	53	20	23	5.0	36	27	26.5	29	57	11.2
Screen diameter ..... (mm)	30	71	94	78	108	108	137	137	137	137
SCREEN TYPES:										
Medium persistence	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Long afterglow	No	Yes	Yes	To order	Yes	Yes	Yes	To order	To order	To order
Blue photographic	To order	To order	Yes	To order	Yes	Yes	To order	To order	To order	To order
Short persistence	To order	No	No	No	To order	No	No	No	To order	No

* Data is given for each gun.

Brief details of the range and typical operating characteristics are given here—for full data please use the coupon adjoining.

ETEL

Electronic Tubes Limited

Kingsmead Works · High Wycombe · Bucks
Telephone: High Wycombe 2020

Please send me data on the types ticked

Name .....

Position ..... 1CP31 ☐ 4LP31 ☐

Company ..... 3AFP31 ☐ 5BKP31 ☐

Address ..... 3AZP31 ☐ 5BUP31 ☐

..... 3BLP31 ☐ 5BVP31A ☐

..... 4EP31 ☐ 5CLP31 ☐

ETL20a

Years of research...

have resulted in an extensive range of high-quality DANAVOX components and accessories, suited for tape-recorders, dictating machines, pocket radio sets, etc.
A small selection has been picked out and illustrated below, but our export department will welcome your further inquiries which will be followed up by a complete component catalogue as well as our most favourable quotation.

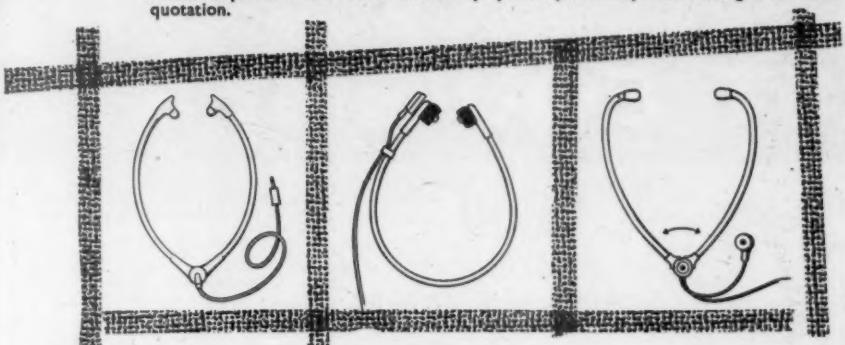

Stetoclip Featherweight No. 3530—40

Stetoclip Junior "60" No. 3530—35

Stetoclip Senior No. 3530—02

Plastic Earset No. 3512—83, Magnetic Earphone available in impedances from 15-8,000 Ohms, and cord with plug-combination and length according to individual requirements.

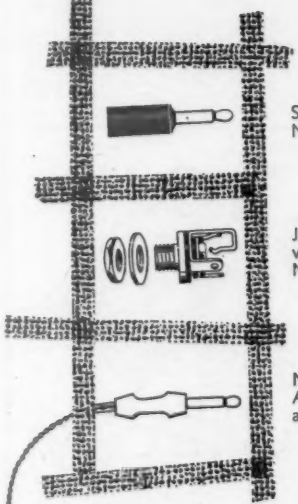

Straight Jackplug No. 7311—31

Jacksocket with breaker No. 7314—08

Moulded Straight or Angle Jackplug, only available with cord.

3-pos. Switch No. 2030—08

2-pos. Switch No. 2030—16

Teleclip, available with earphones wired in series or stereophonically, and with various types of earpads, f.inst. this lucite "Earcup" well suited for conference rooms, schools, etc.

danavox

DANAVOX A/S, LERSO PARKALLE 112, COPENHAGEN O, DENMARK TELEPHONE: RY 8401, TELEPRINTER: NO. 5848

BEULAH ELECTRONICS

BEULAH ELECTRONICS

offer a highly competitive Range of

TEST EQUIPMENT!

. . . and a new instrument . . .

the D800

CLOSED CIRCUIT TELEVISION CAMERA

Beulah Electronics' most dramatic development to date, and the focus of interest in the Press and at the recent Industrial Photographic and TV Exhibition, the new D.800 Camera makes an outstanding contribution to this field.

Compact design, extreme simplicity and low price are notable features. Illustrated brochure available.

Some of the other top-grade BEULAH ELECTRONICS instruments available. FACTORY ASSEMBLED, WIRED AND TESTED.

Capacitance Decade Box	
DC-1U/F	£9 0 0
Model DC-1U (in Kit Form)	£5 18 6
Resistance/capacitance Bridge	
C-3U/F	£13 2 6
MODEL C-3U (in Kit Form)	£7 19 6
Audio Valve Millivoltmeter	
AV-3U/F	£19 19 0
MODEL AV-3U (in Kit Form)	£13 18 6
Audio Wattmeter AW-1U/F	£19 19 0
MODEL AW-1U (in Kit Form)	£13 18 6
Electronic Switch S-3U/F	£15 0 0
MODEL S-3U (in Kit Form)	£9 18 6

Deferred terms available on most items. Please ask for details.

See the range at our London Showroom, 138 Lewisham Way, New Cross, S.E.14.

MODEL 0-12U/F Laboratory 5"
OSCILLOSCOPE £44 *complete with 48-page Handbook plus carriage.*

MODEL 0-12U (in Kit Form)
£34. 15s.

Large 5in. flat screen ensures great accuracy and facilitates observation. Patented sweep circuit of exceptional range covers 10 c/s. to over 500 Kc/s. in five steps, many times the sweep range of other 'scopes. Gold-plated printed-circuit. Wide Band Amplifier for TV and F.M. Servicing. Vertical Band-Width 3 c/s. to over 5 Mc/s. Electronically stabilised power supply.

THIS Will Save You Time & Money!

The most efficient lowest priced time base component shorting turn tester.

Test—
Line Output Transformers, Deflector Coils, Blocking Oscillator Transformers.

For—
Shorting Turns
Open Circuit.

£7. 10. 0.
(Nett Trade)

Subject to quantity discount to wholesalers.

SKANTEST

Beulah Electronics Research has produced this revolutionary instrument for you . . .

the D900

a new, compact, dynamic

TRANSISTOR TESTER/ POWER SUPPLY

- Makes possible dynamic transistor testing in situ.
- Tests CURRENT GAIN (AC) ALPHA GAIN
- Tests CURRENT GAIN (under D.C. conditions) BETA GAIN.
- Measures leakage Currents between Collector/Base and Collector/Emitter, at any voltage between 0-25 v.

Tests transistors while in circuit. Has its own self-contained power supply providing smoothed D.C. 0-25 v. Size 5½ × 3 × 2½in. **Price £10.** Order or send for full details TODAY.

PLEASE SEND CASH WITH ORDER NOW OR ASK FOR ILLUSTRATED LEAFLETS TODAY stating instruments in which you are interested

Sole Distributors for **BEULAH ELECTRONICS**

DIRECT T.V. REPLACEMENTS LTD.,

TIDeway 6666 **Dept. WW/1/61 138 Lewisham Way, New Cross, London, S.E.14** *Day and Night Service: TIDeway 6668*

G.E.C.

RADIO TELEPHONES

*save time * cut costs*

make the most of your

TRANSPORT

Please write for full information to

THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

'RADIO COMMUNICATIONS DIVISION · LOWER FORD ST · COVENTRY · ENGLAND

Smee's G.E.C. 64

Precision miniature soldering iron

for mains or low voltage operation

FINGERTIP CONTROL

with sharp, controlled heat for transistor and other small assemblies. Location of element under soldering tip produces 30 watt capacity for only 15 watts consumption. Available for 230/240v. 220, 200, 110 and low voltages 6, 12, 24, 28, 50v. List prices range from 25/- to 29/6 (all prices subject).

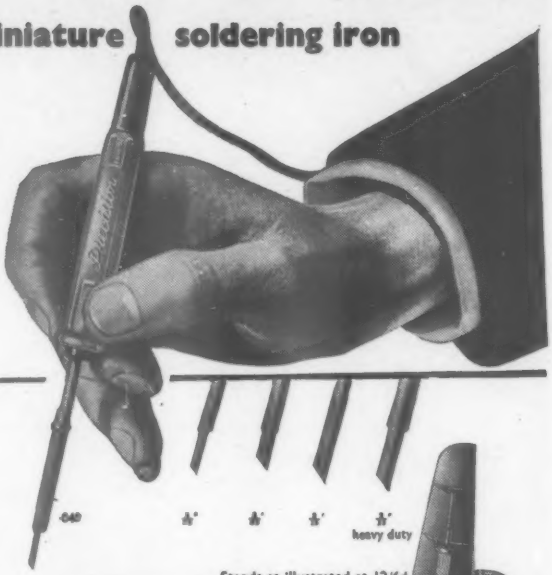

INTERCHANGEABILITY

The 5 sizes of bits shown can be easily changed by sliding on and off the shaft. Heavily plated, split right through to facilitate changing, special hard wearing alloy.

Stands as illustrated at 12/6d

send for detailed catalogue to

A·N·T·E·X LIMITED 7-8 IDOL LANE LONDON EC3 Tel: MANsion House 2716

TRANSFORMERS CHOKES



PLUGS SOCKETS

RESISTORS

SWITCHES

ARDENTE ARDENTE ARDENTE



POTENTIOMETERS

Miniature
Electronic Components

FULL TECHNICAL DATA UPON REQUEST



AMPLIFIERS

ARDENTE ACOUSTIC LABORATORIES LTD

8-12 MINERVA ROAD : LONDON : NW10 Phone: ELGAR 3923 (6 lines) Telegrams: HAILER, LONDON

A1

And Now! the Transcription Unit with Autochange

LABORATORY SERIES
AUTO TURNTABLE TYPE
A designed specially to meet the demand for a Transcription Record Player with provision for automatic use if desired. The heavy turntable incorporates a magnetic shield and sufficient thickness of non-magnetic materials to provide ideal operating conditions for the most sensitive pick-ups. A unit for those who want perfect playing for both stereo and monophonic records.

FOR A HAPPY NEW YEAR

by Garrard of course

"The 'Hi-Fi' fans in Great Britain, but not in America, have hitherto set their faces against record changers; perhaps this will cause them to look round a little."

Vide Percy Wilson, The Gramophone, *Sept.* 1960

THE GARRARD ENGINEERING AND MANUFACTURING CO LTD
SWINDON · WILTSHIRE

ADCOLA
(Regd. Trade Mark)

Soldering Equipment
for
Miniature Solder Jointing

LIST No. 70
Fitted with an
ADCOLA
SPECIAL
PURPOSE BIT
LIST No. 47

FOR BENCH
LINE ASSEMBLY
IN THE ELECTRONIC
INDUSTRY & WORK
ON SUB-MINIATURE
AUDIO COMPONENTS

AVAILABLE
IN ALL
VOLT RANGES

ALL BRITISH
PRODUCT

British & Foreign
Patents
Reg. Designs, etc.

ADCOLA PRODUCTS LTD.
GAUDEN ROAD, CLAPHAM HIGH ST., LONDON, S.W.2
Telephones: MACaulay 4272 & 3101. Telegrams: SOLJOINT.
AUSTRALIAN OFFICE: 490 ST. KILDA ROAD, MELBOURNE, S.C.2.

full range sound from
small size cabinet
STYLED FOR
THE SIXTIES

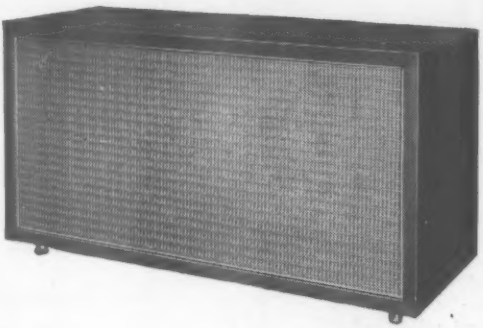

FOR VERTICAL OR
HORIZONTAL USE.

BCS 1875

Exceptional performance for very small size cabinet 24 in. x 12 in. x 10 in. deep. Cabinet of polished walnut veneer on all four sides for vertical or horizontal use. The cabinet is of the tuned pipe reflex type. Suitable for either stereo or monaural use. Weighs only 28 lbs. Feet supplied separate...rubber suction caps to attach to any of the four sides.

Bookcase loudspeaker completely wired and fitted with all components except Metal Cone Speaker . . . £22.10.0



METAL CONE SPEAKER
The established favourite improved still further with the new Power Bracket... £9.10.0 tax paid.

Power Bracket can be supplied separately 11/6

Full details from Sound Equipment Section

G.E.C.
HIGH QUALITY
SOUND EQUIPMENT

Metal Cone Loudspeakers · Presence Units · Stereophonic Systems
Periphonic Loudspeaker System · Pre-amplifiers · Amplifiers

RADIO GROUP · THE GENERAL ELECTRIC CO LTD · MAGNET HOUSE · KINGSWAY · LONDON WC2

R-C Oscillator Type TF 1101

A compact general-purpose oscillator giving a low-distortion output of ½ watt max. into 600 ohms. Frequency range 20 c/s to 200 kc/s. Output level indicated by panel-meter and calibrated attenuator. A band-pass filter provides for a 1-kc/s output of very low distortion.

Audio Tester Type TF 894A

The TF 894A covers from 50 c/s to 27 kc/s. It comprises a heterodyne oscillator and 0- to 50-dB, 600-ohm attenuator combined with a three-range a.c. voltmeter which is available for external use. Output: 2 watts maximum at 600, 15, and 3 ohms. Voltmeter ranges: 80, 8, and 4 volts full-scale.

A.F. Power Meter Type TF 893A

A wide-range absorption-type power meter for use in the frequency range 20 c/s to 35 kc/s. The power measurement range is 20 μW to 10 watts and the input impedance can be set to any of 48 different values between 2.5 ohms and 20 kΩ.



Distortion Factor Meter Type TF 142F

Measures total spurious content, up to 30 kc/s, of inputs within the fundamental frequency range 100 c/s to 8 kc/s. Distortion measurement range: 0.05 to 50%. The input can be at any level between 500 mV and 500 volts.

A.F. Power Meter Type TF 1347

A sensitive, accurate, direct-reading instrument. Its ten power ranges, covering 10 μW to 6 W, and 5½-inch meter provide excellent discrimination. Impedance range: 2.5Ω to 20kΩ in 11 steps. Frequency characteristic substantially flat from 50 c/s to 20 kc/s.

Wave Analyser Type TF 455E

Gives amplitude and frequency of individual components of either audio signals or the modulation envelopes of r.f. signals up to 500 Mc/s. Its a.f. range is 20 c/s to 16 kc/s and its amplitude measurement range is 30 μV to 300 volts.

PRECISION AUDIO MEASUREMENT

Measurements of audio performance to modern standards call for the very best in test equipment. Marconi's offer an unrivalled range of instruments to meet the most exacting requirements at every stage in the design-production cycle. From first evaluation of laboratory models to final testing in the factory, and maintenance in the field, there is a Marconi instrument to meet the need.
For full details write for leaflets G172.

calls for

MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS
DISTORTION METERS · DEVIATION METERS · Q METERS & BRIDGES
FREQUENCY METERS · POWER METERS · TRANSMISSION MONITORS
VOLTMETERS · OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS

Please address enquiries to MARCONI INSTRUMENTS LTD., at your nearest office:

London and the South: English Electric House, Strand, London, W.C.2. Telephone: COVent Garden 1234
Midlands: Marconi House, 24 The Parade, Leamington Spa. Telephone: 1408
North: 23/25 Station Square, Harrogate. Telephone: 67455
Export Department: Marconi Instruments Ltd., St. Albans, Herts. Telephone: St. Albans 59292

TC 172

THE WORD MAXI-Q REGD. IS THE REGISTERED TRADE MARK OF DENCO (CLACTON) LIMITED
IT IS ALSO A GUARANTEE OF WORKMANSHIP AND TECHNICAL PERFORMANCE

OUR RANGE OF PRODUCTS IS SO GREAT THAT WE NOW HAVE TO REQUEST THE AMOUNT OF 1/4 FOR OUR GENERAL CATALOGUE AND TO SAVE YOU POSTAL ORDER POUNDAGE CHARGE WE REQUEST SEND 1/4 IN STAMPS.

MODULATED TEST OSCILLATOR MTO.1

- ★ Provides a modulated signal suitable for I.F. alignment, also trimming and tracking R.F. circuits.
- ★ Frequency is continuously variable from 170-475 kc/s and 550-1,600 kc/s.
- ★ Suitable for the alignment of transistor receivers.
- ★ Operates from a single 9-volt grid-bias battery (not supplied) which is housed within the unit.
- ★ The case is manufactured from steel and is finished in silver hammer. The front panel is gloss black bearing white lettering. Dimensions are 5 1/16in. x 4 1/16in. x 3in.
- ★ Supplied with full operating instructions.

PRICE £3/17/6

PLEASE SEND S.A.E. WITH ALL ENQUIRIES

DENCO (CLACTON) LTD.

(DEPT. W.W.)

357/9 OLD ROAD, CLACTON-ON-SEA, ESSEX

STOP PRESS
Components for the "BRIMAR CRYSTAL CONTROLLED F.M. TUNER." Completely punched aluminium Chassis and gold hammer finished Front Panel, 10/10. BX/IFT. 1 (L5, L6) 7/6. BX/IFT. 2 (L7, L8), 7/6. BX/RDT (L9, L10, L11), 12/6. BX/L3 (L3), 4/3. BX/L1-2 (L1, L2), 2/9. BX/L4 (L4), 2/3.

TRANSCRIPTION MOTORS

Hand Built For Only £12.10.0 plus tax

The Connoisseur 2 speed motor provides the basis for real high fidelity stereo reproduction. Every one is hand built. It embodies those high standards of workmanship and materials normally associated only with motors costing much more. Connoisseur really does offer more for less.

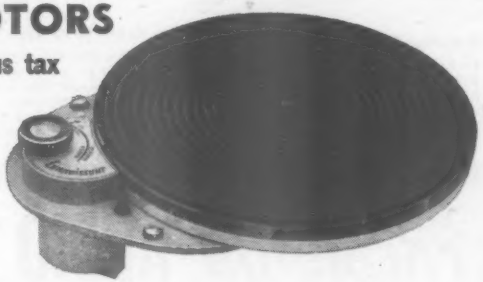

The superlative 3 speed transcription motor type 'B' is available at £27 16 1 inc. tax.

Look at the specification.

Full 12in. heavy aluminium alloy turntable; 2 speeds 45 and 33⅓ r.p.m., precision ground shafts; Nylon graphite type bearings; Virtually vibrationless motor: Neon on/off indicator.

Only £16 13 1 inc. tax.

Connoisseur

MARKET STREET, BRIGHOUSE
Tel.: Brighouse 2142

Write for fully descriptive leaflet to:—

A R SUGDEN & CO(ENGINEERS) LTD.

More and More T/V – F/M RELAY and COMMUNAL AERIAL SYSTEMS

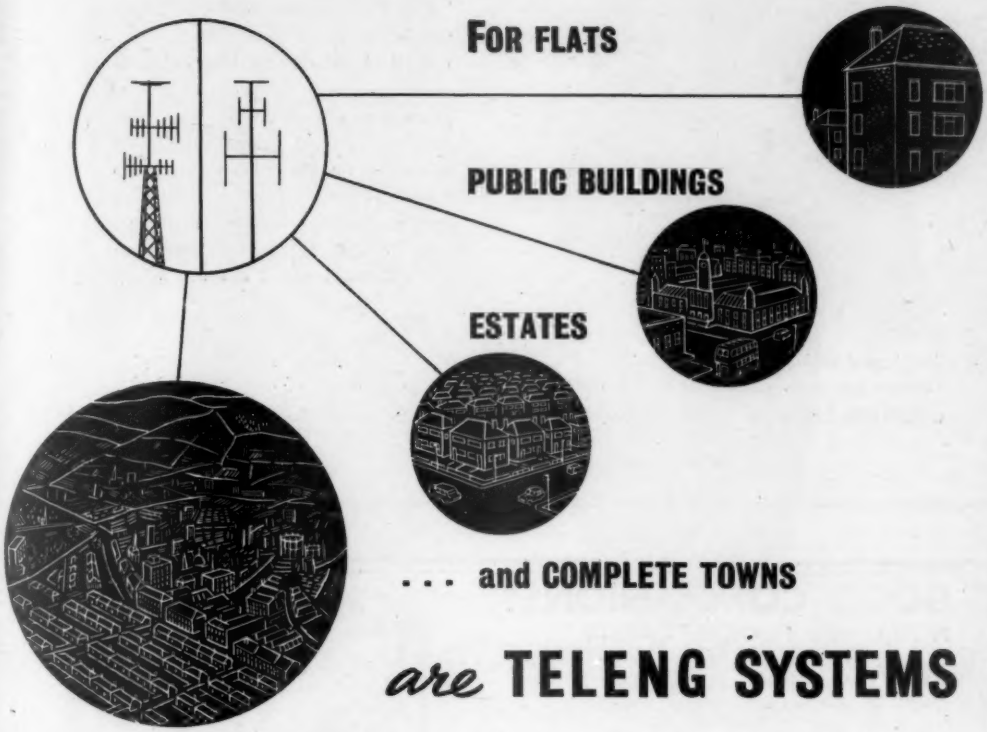

are TELENG SYSTEMS

Teleng's many YEARS of successful practical experience is at your service for the installation of complete systems serving any channels, any size of area coverage, and any number of outlets for standard receivers.

Teleng Equipment is built to the highest public service standards, gives known performance and utmost reliability, fully obeying Post Office Engineering Department requirements and insurance dictates for absolute safety to connectees.

Full system planning and quotations are given without obligation.

this is why MORE and MORE TECHNICAL AUTHORITIES Specify . . . .

TELENG

TELENG LIMITED, TELENG WORKS, CHURCH ROAD, HAROLD WOOD, ROMFORD, ESSEX.
Ingrebourne 42976-7-8

163 Mains transformers for valve and contact-cooled rectifiers, audio output transformers and chokes and fully described in Gardner's new "S/M" Catalogue available on request.

Electrical characteristics, dimensions, weights, fixing centres and prices are fully described in this new publication which includes the latest additions to the Solent range (to BSS 2214 group 10/55) and the high performance but inexpensive "Minifford" range. Typical frequency response characteristics are also given.

Your copy of Gardners "S/M" Catalogue can be obtained now by writing to

GARDNERS RADIO LTD., SOMERFORD, CHRISTCHURCH, Hants.

Gardners

telephone Christchurch 1734

GOOD COMPANIONS!

MINIATURE TRANSISTORIZED SIGNAL GENERATOR TYPE 40

- ★ Up to 20 Mc/s on fundamentals.
- ★ R.F and Audio Output, Attenuated.
- ★ Accuracy better than 2%.
- ★ Miniature size only 4½in. x 3½in.

PRICE NET £5.15.0. Battery 2/6 extra

Post (C.O.D. or C.W.O.), 2/6.

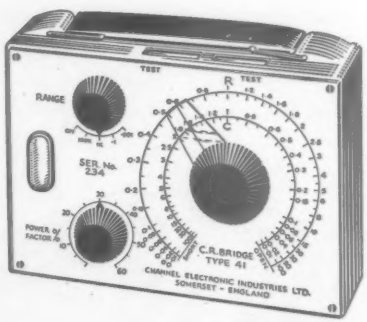

MINIATURE TRANSISTORIZED R.C. BRIDGE TYPE 41

- ★ Capacitance 5 μμF to 20 μF.
- ★ Resistance 5 Ω to 20 MΩ.
- ★ Magic Eye Balance Indicator.
- ★ Calibrated Power Factor Check.
- ★ Miniature Size—Light Weight.

PRICE NET £5.10.0. Battery 3/3 extra.

Post (C.O.D. or C.W.O.), 2/6.

EXPORT ENQUIRIES INVITED.

SEND S.A.E. FOR LEAFLETS, OR ORDER TODAY, FROM

CHANNEL ELECTRONIC INDUSTRIES LTD. DEPT. P., DUNSTAN RD. BURNHAM-ON-SEA, SOM.

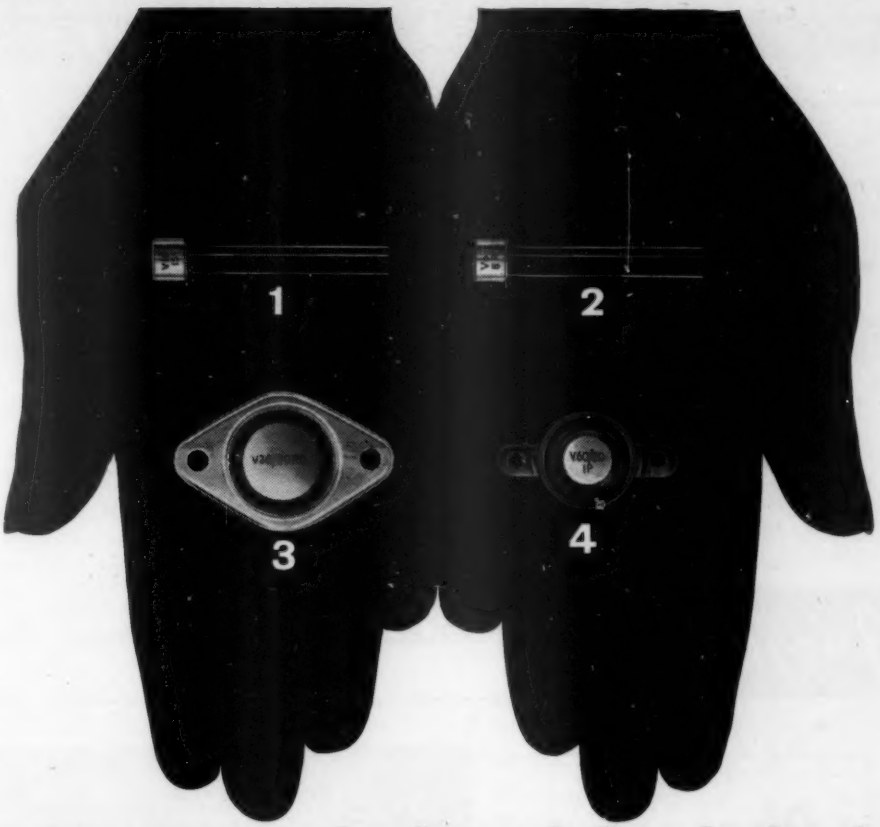

a new range designed for industry

1 Switching V10/18 Jedec cased

2 RF Jedec cased

3 Diamond Power

4 Intermediate Power

The new range of Newmarket industrial transistors is specially designed for operating under the most rigorous industrial conditions where requirements exist for:

Long life · Hard, stable characteristics
Interchangeability · Ease of replacement
Resistance to extreme conditions
Proof against corrosion · Encapsulation
in standard, preferred outlines

These transistors are designed to comply with British Services specifications. Send for the data sheets of these transistors in a copy of 'Semiconductor Device Data', if you have not one already.

Look for the gold top— the Newmarket Trade Mark

NEWMARKET TRANSISTORS

Newmarket Transistors Limited
Exning Road, Newmarket, Suffolk
Tel: Newmarket 3381/4
Cables: Semicon Newmarket

TA 48Q

TELEVISION AERIAL COMPONENTS



DESIGNED FOR CONSTRUCTING BAND I & BAND III T.V. AERIALS

ELEMENT DIMENSIONS SUPPLIED FOR ALL CHANNELS

Selecting at random from our new multi-page catalogue:

- Band III Folded Dipoles (*As illustrated*).
- Reflector and director rod holders.
- Masthead Fittings for ¾", 1", 1½" and 2" Masts.
- Mast Coupling Units for 2" Masts.
- Insulators, Both Rubber and Plastic (*As illustrated*).
- Alloy Tubing for Elements, Cross-boom and Masting.

Send 1/- P.O. for the revised, fully illustrated catalogue to

Fringevision Ltd MARLBOROUGH, WILTS. *Phone : 657/8*.

Phœnix

EYELETTING and light PUNCHING MACHINES

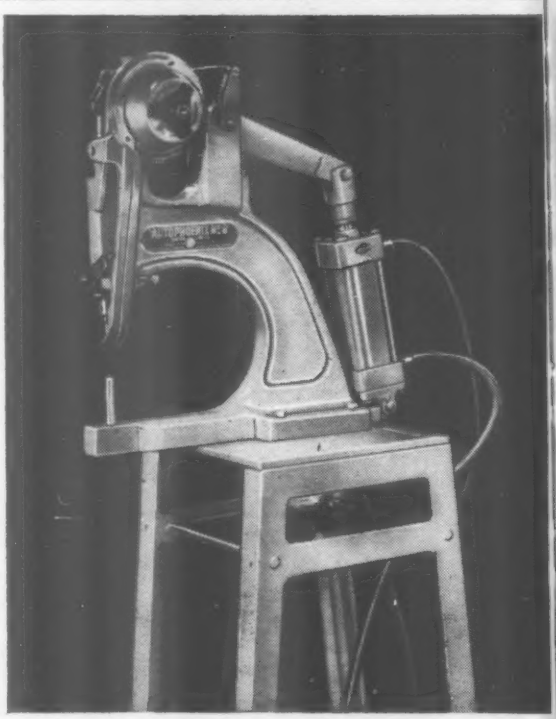

AUTOPHOENIX No. 6A. A new and improved air-operated machine for the automatic insertion and closing of eyelets. The deep throat, high vertical gap and projecting base make this an ideal machine for the eyeletting of components in radio chassis even in the closest corners and, of course, for spinnings, cylinders and plastic mouldings. It can be supplied with built-in air compressor.

We manufacture a large range of hand and automatic Eyeletting and Piercing Machines and also stock eyelets which we can supply in small or large quantities. Full illustrated brochure of the "Phoenix" machines, write for leaflet W.W.2.

HUNTON LTD.

PHOENIX WORKS, 114-116 EUSTON ROAD, LONDON, N.W.1

Tel.: EUSton 1477 (3 lines) Grams.: Untonexh, London

FOR THE FIRST TIME IN BRITAIN

New POWER WIRE-WOUND RESISTORS!

HIGH GRADE RESISTORS AT LOW COST

A new Dubilier process makes available to the design engineer a power wire-wound resistor possessing high-grade characteristics which costs no more than an equivalent standard type. The resistance wire is uniformly wound on a silicone-processed fibre-glass core which is then sealed into a ceramic housing. The result is a remarkably stable resistor which is completely insulated except for the connecting wires.

FIG. 1. DERATING CURVE

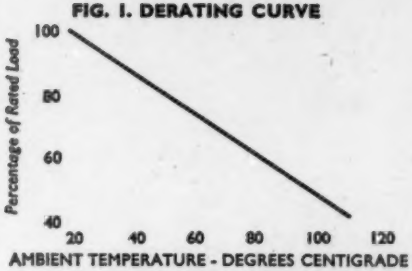

FIG. 2. TEMPERATURE RISE/LOAD

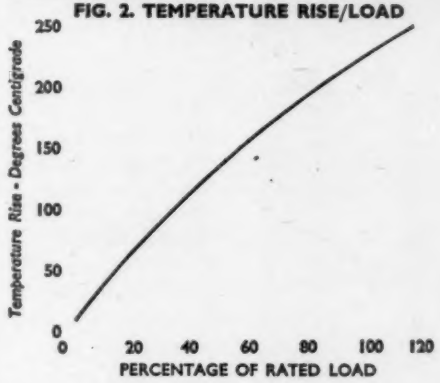

PERFORMANCE UNDER OPERATING CONDITIONS

- Resistance change less than 5% after 100 hours at 40°C. ambient temperature and 95% relative humidity.
- Resistance change less than 2% after three times normal load for 5 seconds.
- Resistance change less than 5% after 500 hours at full load in 25°C. ambient temperature.
- Resistance change less than 1% and no physical effects due to soldering.

MAXIMUM TEMPERATURE COEFFICIENT BETWEEN – 55 and +275°C.

TYPE	0.05%/°C.	0.03%/°C.
PW5	0.5Ω to 2.5Ω	2.5Ω to 2.0kΩ
PW7	0.5Ω to 8.0Ω	8.0Ω to 6.5kΩ
PW10	1.0Ω to 10Ω	10Ω to 10kΩ

TYPE	PW5	PW7	PW10
Wattage	5.0	7.0	10.0
Min. Value	0.5Ω	0.5Ω	1.0Ω
Max. Value	2.0kΩ	6.5kΩ	10kΩ
Length	$\frac{3}{8}$"	$1\frac{25}{64}$"	$1\frac{3}{4}$"

Width and height of all three types are $\frac{1}{8}$" and $\frac{11}{32}$" respectively.

DUBILIER

Catalogue R15A available on request.

DUBILIER CONDENSER CO. (1925) LTD · DUCON WORKS · VICTORIA ROAD · NORTH ACTON · LONDON W.3

TELEPHONE: ACORN 2241 TELEGRAMS: HIVOLTCON WESPHONE LONDON

INCREASE YOUR SALES AND PROFITS WITH...

New!

Rechargeable
"Blue Battery"
for Transistor Radio using 9-Volt Battery.

This revolutionary miniature "BLUE BATTERY" is designed as a perfect companion for your Transistor Radio. "BLUE BATTERY" is continuously rechargeable for **more than 100 times.**

Excellent Features
* Magnificent tone
* Most economical
* Reliable power
* Easy to charge

SPECIFICATION

	BATTERY		CHARGER	
Dimension	25x16x49mm		31x22x66mm	38x24x80mm
Weight	TR—9 37g.	TRC—9—2A1 23g.		TRC—9—2B1 35g. TRC—9—2B24 40g. TRC—9—2B25 42g. TRC—9—3B1 43g.
Voltage		A—Type A.C. 100—130V		B—Type A.C. 200—240V

KIND OF PLUGS

TRC—9—2A1 2 flat pins
TRC—9—2B1 2 flat pins
TRC—9—2B24 2 round pins (4mm)
TRC—9—2B25 2 round pins (5mm)
TRC—9—3B1 3 flat pins

MANUFACTURERS & EXPORTERS
TOREI INDUSTRIAL CORPORATION
No. 150, KUGAHARA-CHO, OHTA-KU, TOKYO, JAPAN
Cable: "TOREINDUST" TOKYO

* GOOD TEMPERATURE-STABILITY
* LOW POWER CONSUMPTION
* SHOCK-RESISTANT CONSTRUCTION

SEI

THERMOSTATICALLY CONTROLLED
CRYSTAL OVENS
TYPE QC940

Tested to meet RCS 11 requirements for bump and vibration. Will take one or two D.E.F. 5271-Style D crystal units in low-loss PTFE sockets.

- **Close control: ±2°C from −30°C to +70°C.**
- **Low power consumption: 6-0 watts at −30°C.**
- **Low loss PTFE sockets.**
- **Small size, only 1¼" dia. x 2" long.**
- **Low weight: only 2¼ ozs.**

Write for technical leaflet.

SALFORD ELECTRICAL INSTRUMENTS LTD
TIMES MILL · HEYWOOD · LANCASHIRE Tel: HEYWOOD 6068
London Sales Office: Magnet House, Kingsway, W.C.2. *Tel:* Temple Bar 4668
A Subsidiary of THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

RADIO EXPORT

TUBES ONLY

It is our pleasure to wish our customers in all parts of the world a Happy and Prosperous New Year

HALTRON RADIO TUBES again achieved a greater turnover plus a bigger volume of sales, and this in spite of the fact that during the year prices generally had been reduced. What is the secret of this success? We think the answer is that we have the most comprehensive stock in the world (over 3,000 types), really competitive prices and quick execution of orders. We are all set to follow the same pattern in 1961.

OUR ORGANISATION IS AIR REGISTRATION BOARD APPROVED.
YOUR INTEREST IN HALTRON RADIO TUBES IS SOLICITED.
ASK FOR LATEST PRICE AND STOCK LISTS.

HALTRON

HALL ELECTRIC LTD

HALTRON HOUSE, ANGLERS LANE, LONDON N.W.5.

Tel.: Gulliver 8531 (10 lines) Telex 2-2573 Cables: "Hallectric London"

HALTRON

JACKSON the big name in PRECISION components

Jackson Brothers' Stand Off Insulators and Terminal Strips are used in large quantities by all the services and in every branch of Electronics, Neucleonics and Communications. Write now for fully illustrated list of complete range of Stand Off Insulators comprising some 40 different types.

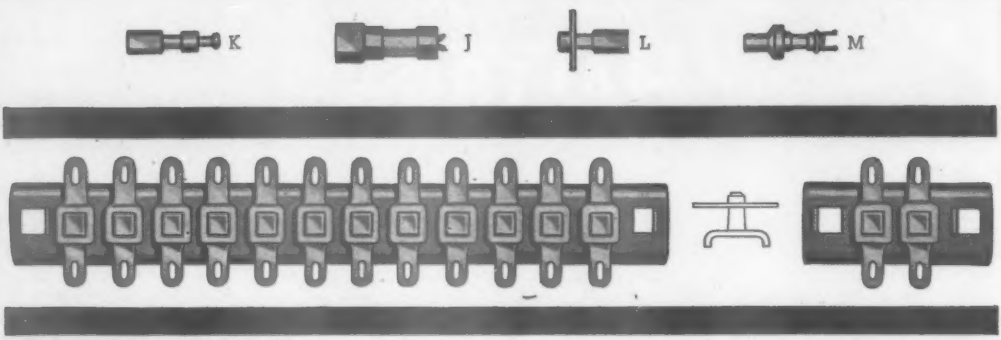

JACKSON BROS. (LONDON) LTD., KINGSWAY-WADDON, SURREY

Telephone : Croydon 2754-5 Telegrams : Walfico, Souphone, London

Canadian Distributors :- Messrs. R. Mack & Co. Ltd., 1485, South West Marine Drive, Vancouver 14, B.C., Canada

American Distributors :- Messrs. M. Swedgal Electronics, 258, Broadway, New York 7, U.S.A.

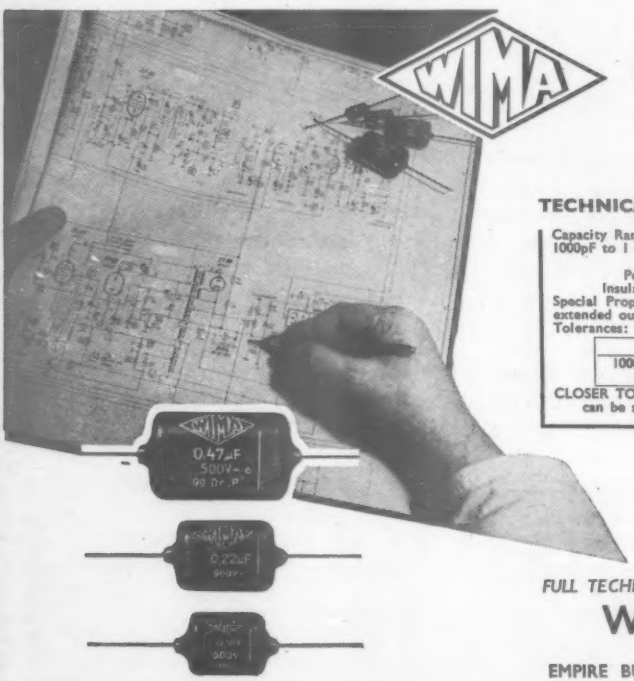

WIMA *Tropydur*

CAPACITORS

for Reliability and Long Life

TECHNICAL SPECIFICATION

Capacity Range:
1000pF to 1 mfd. in accordance with international E.6. series.
Temperature Range:—20°C to +90°C.
Power Factor: Less than 1% at 1500 c/s at 20°C.
Insulation Resistance: Better than 20,000 MΩ at 20°C.
Special Properties: Safe HF contact Low induction. Screened by extended outer foil.
Tolerances:

RANGE	STANDARD	SPECIAL
1000 pF to 0.068 mfd	±20%	±10%
0.1 mfd to 1 mfd	±10%	± 5%

CLOSER TOLERANCES
can be supplied for some values against special orders.

Delivery: The majority of popular values are available for immediate delivery ex. London stock.

Size and Shape: Because of the unique flat oval design combined with small physical size, WIMA are ideal for printed circuits and where space is valuable.

FULL TECHNICAL SPECIFICATION AND PRICES FROM:—

WAYCOM LIMITED

Sole U.K. Agents.

EMPIRE BUILDINGS, DUKE ST. HILL, LONDON, S.E.1.
Telephone: HOP 2538/9

on-off-
on-off-
on-off-

20,000 times!

Whether you export your radio, television or audio equipments to Scandinavia or not, SEMKO approval of components is important to you for its own sake. It guarantees a quite exceptional reliability and safety.

The Morganite Type 'V' switch is rated at 250 volts 2 amperes and is therefore one of the highest rated SEMKO approved potentiometer switches of wholly British manufacture.

The SEMKO series of tests includes 20,000 operations at full load without a single permissible (even momentary!) mechanical or electrical failure. Compare that with the average 2,000 operations per year that a switch gets in actual use, and you see what the famous 'S' symbol on a Morganite switch means in terms of service! Fully complies with BSS415 too.

SEMKO approval for Morganite Potentiometer Switches

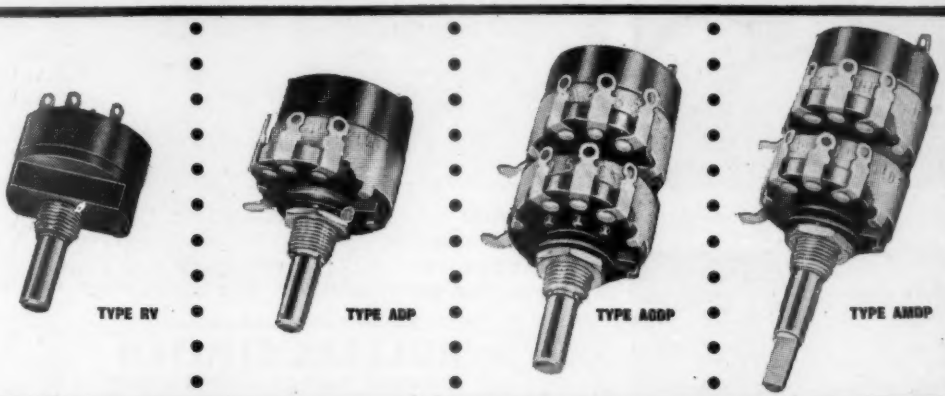

MORGANITE RESISTORS LTD.
BEDE TRADING ESTATE · JARROW · COUNTY DURHAM
TELEPHONE: JARROW 89-7771

J100A/344

COMPACT HI-FI *by* Armstrong

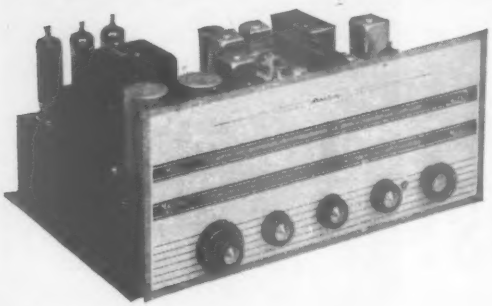

STEREO 55 *(illustrated)* 32 GNS.

TUNER-AMPLIFIER CHASSIS

An outstanding new Armstrong chassis combining AM and FM Tuners, a Stereo Control Unit and two High Fidelity 5 watt Amplifiers in one compact unit. In all its functions the Stereo 55 is designed for mono as well as stereo use so that up to 10 watts output is always available. Compare the features and specification of each section with tuners and amplifiers sold separately and then compare the cost.

Full VHF and medium bands ● Inputs for tape recording and playback ● Alternative pickup inputs ● Booster Unit available for low output pick-ups ● Input for possible future stereo radio ● Separate bass and treble controls and dual volume control for erase of balancing ●Free instruction booklet with every model.

STEREO 12 Mk. 2 42 GNS.

A new and improved version of the famous Stereo-Twelve. A total of 16 watts output is available from the two 8 watts push-pull amplifiers. VHF, with automatic frequency control, and medium and long bands. Inputs for recording and playback and for stereo radio if required in the future. Booster units are available for low output pick-ups, both mono and stereo.

Post this coupon or write for descriptive literature or call at our Holloway Showroom for full demonstration and professional advice on your installation. Open 9-5 including Saturdays.

NAME..... W.J. 8.

ADDRESS.....

.....

ARMSTRONG WIRELESS & TELEVISION CO. LTD., WARLTERS ROAD, LONDON, N.7 Telephone NORth 3213

Bullers CERAMICS FOR INDUSTRY

High quality material and dimensional precision are attributes of Bullers die-pressed products. Prompt delivery at competitive prices.







We specialise in the manufacture of—

PORCELAIN for general insulation

REFRACTORIES for high-temperature insulation

FREQUELEX for high-frequency insulation

PERMALEX & TEMPLEX for capacitors



BULLERS LIMITED

MILTON · STOKE-ON-TRENT · STAFFS

Phone: Stoke-on-Trent 843/1 (5 lines) · Telegrams & Cables: Bullers, Stoke-on-Trent

Ironworks: TIPTON, STAFFS Phone: Tipton 1691

London Office: 6 LAURENCE POUNTNEY HILL, E.C.4 Phone: MANsion House 9971

CONTACT COOLED RECTIFIERS

SenTerCel

SenTerCel Contact Cooled Rectifiers have been selected by Bush for H.T. supply circuits in their domestic radio receivers. These belong to a comprehensive range of rectifiers which offer important reductions in size, weight and cost over the conventional metal rectifiers. In addition greater facility in chassis layout is permitted since they can be mounted at any angle. A table of ratings is shown below

aid BUSH reliability

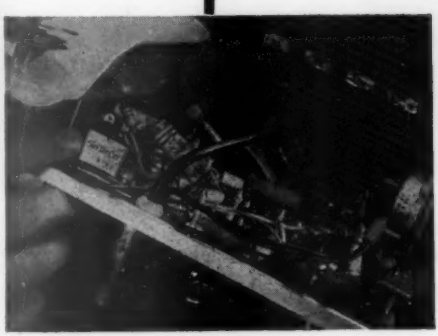

Half-Wave and Voltage-Doubler Connections

Qty.	Type	Circuit	Maximum Input Volts (r.m.s.)	Max. Output Current mA (mean)	Typical D.C. Output Voltage 16 mfd. Reservr. Cap. Half Load	16 mfd. Reservr. Cap. Full Load	60 mfd. Reservr. Cap. Half Load	60 mfd. Reservr. Cap. Full Load
1	C2H	Half-Wave	125	60	135	115	135	120
1	C3H	" "	125	120	120	85	130	120
1	C2D	" "	250	60	275	245	280	255
1	C3D	" "	250	120	275	245	290	275
1	C2B	Volt-Doubler	125	60	275	245	280	255
1	C3B	" "	125	120	280	205	285	285

Push-Pull and Bridge Connections

Qty.	Type	Circuit	Maximum Input Volts (r.m.s.)	Max. Output Current mA (mean)	Typical D.C. Output Voltage 16 mfd. Reservr. Cap. Half Load	16 mfd. Reservr. Cap. Full Load	32 mfd. Reservr. Cap. Half Load	32 mfd. Reservr. Cap. Full Load
1	C2V	Push-Pull	125-0-125	120	140	120	140	130
2	C2D	" "	250-0-250	120	275	250	280	255
1	C3V	" "	125-0-125	240	130	115	140	130
2	C3D	" "	250-0-250	240	280	250	280	260
1	C3B	Bridge	250	120	275	250	280	255
2	C3D	"	250	240	280	250	280	260

Send for leaflet MF/102

STC COMPONENTS GROUP

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

RECTIFIER DIVISION: EDINBURGH WAY · HARLOW · ESSEX

C

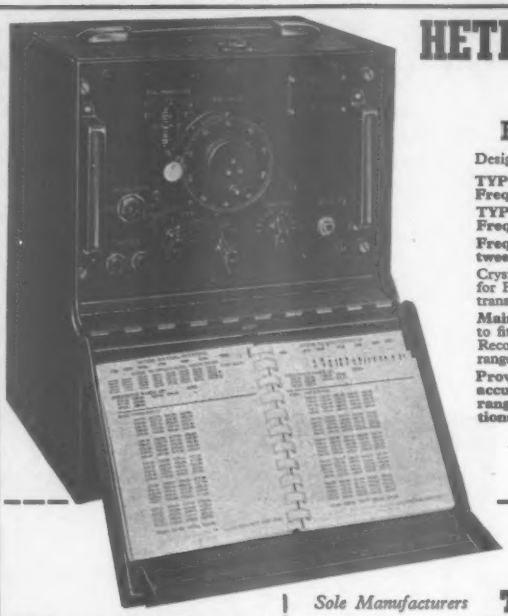

HETERODYNE FREQUENCY METERS

BRITISH MANUFACTURED

Designed and built to rigid services specifications.

TYPE T75.
Frequency Range: 85 to 1,000 megacycles.

TYPE T74.
Frequency Range: 20 to 250 megacycles.

Frequency calibration accuracy: .002% at 25° C. (or .01% between — 20° C. to +70° C.).

Crystal-controlled, portable heterodyne-type Frequency Meters used for Field testing and measurement of pulsed, modulated, or C.W.R.F. transmitters, receivers and signal-generators.

Mains Operated Power Unit available as optional extra and designed to fit into the battery compartment.
Reconditioned and calibration-checked B.C.221 Frequency Meters range 125 Kc/s to 20 Mc/s, still available.

Provisional specifications on a new wide-range, very high accuracy Frequency Meter and also an instrument covering the range 100 Kc/s to 1,000 Mc/s (higher under favourable conditions) available on request.

A

Telemax

INSTRUMENT

Complete Specifications on application to:—

Makers of High Voltage Test Sets and other Electronic Equipment for H.M. Government.

Sole Manufacturers

TELEMECHANICS LTD
(Instrument Division Dept. W.W.8)
TELEMAX WORKS, BROKENFORD LANE, TOTTON, HANTS, ENGLAND.
Telephone: Totton, Southampton 3666 Cables: "Teleset," Totton, Southampton
Agents: Some overseas territories still available.

"BROOMWADE" No.1 Die Grinder

This small Grinder weighing approximately 3lbs. is an excellent tool for finishing metal patterns, scroll work, removal of burrs, lapping holes, polishing, filing and similar jobs. It is invaluable in every die shop.

Running at a speed of 15,000 r.p.m. it is a highly efficient, reliable tool.

Write today for publication No. 419 T.E.

BROOM & WADE LTD.,
P.O. Box No. 7, High Wycombe, Bucks.
Telephone: High Wycombe 1630 (10 lines)
Telex: 83-127

"BROOMWADE"
Air Compressors and Pneumatic Tools
YOUR BEST INVESTMENT

B/SSAS

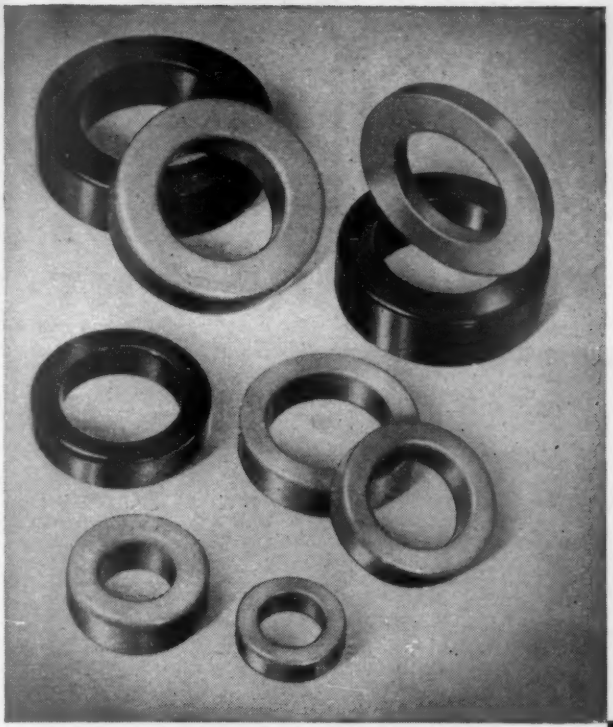

STC

PERMALLOY POWDER CORES

have:

Highest Permeability: 145
Highest dielectric strength for core finish: 3000V. A.C.
High stability of inductance with Time, Temperature and Wax impregnation
High 'Q' factors for frequencies up to 200 Kc/s
Low core losses
Low temperature co-efficient of inductance
Negligible external field

The demand for coils for audio and carrier frequency circuits has required the development of cores having high stability with time, temperature and magnetisation. To meet these stringent requirements STC have produced cores having the highest permeability and lowest core losses possible. These requirements have been proved to be most satisfactorily met by employing a core structure made from compressed insulated powdered material. By this means the requisite air gaps are introduced in an evenly distributed fashion, and the magnetic material is sub-divided so as to reduce eddy current losses.

Write for Technical Data Sheets to:—

STC COMPONENTS GROUP

60/7MM

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

MAGNETIC MATERIALS SALES DEPT: EDINBURGH WAY HARLOW ESSEX

For mobile radio testing

PYE

rely on

MARCONI TEST EQUIPMENT

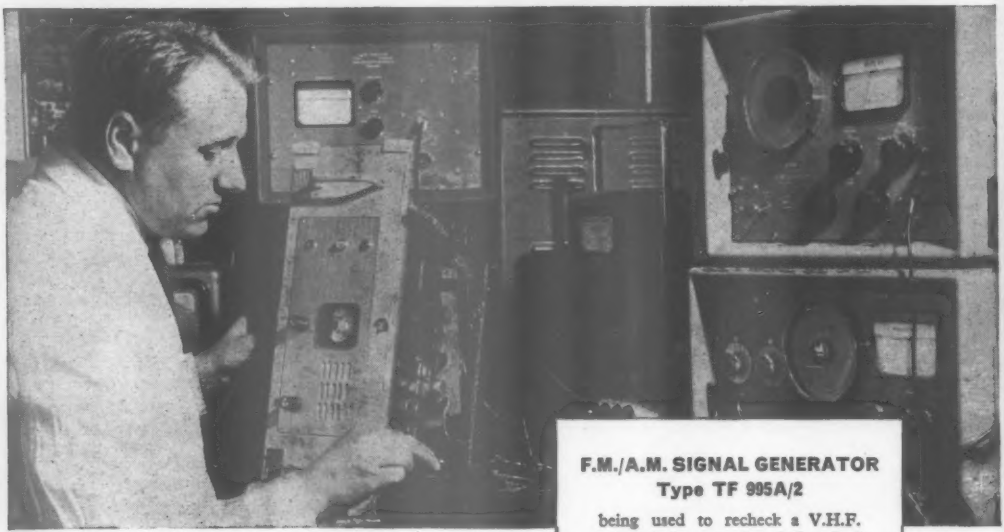

F.M./A.M. SIGNAL GENERATOR
Type TF 995A/2

being used to recheck a V.H.F. radiotelephone receiver before final test at the Cambridge works of Pye Telecommunications Ltd.

Pye prefer precision to post-mortems. That is why the Cambridge factory of Pye Telecommunications Ltd. uses a large number of Marconi instruments in the design and manufacture of radiotelephone equipment. Pye make particularly good use of the TF 995A (Series) of Signal Generator. This versatile F.M./A.M. generator (Frequency range: 1.5 to 220 Mc/s) provides comprehensive test and alignment facilities in the v.h.f. and h.f. bands. It has crystal check points for accurate calibration of tuning dials, slow-motion drive and direct-reading incremental tuning for precision bandwidth measurements, monitored f.m. deviation and a.m. depth for signal-to-noise measurement, and simultaneous f.m. and a.m. for limiter and discriminator testing. A special narrow-deviation model —TF 995A/5— is available for 25 kc/s working. For further details write for Leaflet G 184.

MARCONI INSTRUMENTS

THE INTERNATIONAL CHOICE FOR ELECTRONIC MEASUREMENT

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS · FREQUENCY METERS · VOLTMETERS · POWER METERS · DISTORTION METERS TRANSMISSION MONITORS · DEVIATION METERS · OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS · Q METERS & BRIDGES

London and the South: English Electric House, Strand, W.C.2 Telephone: COVent Garden 1234

Midlands: Marconi House, 24 The Parade, Leamington Spa Telephone: 1408

North: 23/25 Station Square, Harrogate Telephone: 67455

Export Department: Marconi Instruments Ltd., St. Albans, Herts, England. Telephone: St. Albans 59292.

REPRESENTATION IN 68 COUNTRIES

TC184

These new STC complete packaged oscillator units represent a revolutionary step forward in crystal design. They are extremely small units for use as laboratory references or as the oscillator section of high performance equipment. The ruggedness of design together with the small size makes possible a degree of portability hitherto unknown in this type of unit. Standard frequency is 5 Mc/s.

Write for Technical Data Sheets.

1 in 10^9 per day frequency standard for laboratories at £195

One of a new, low priced range of frequency standards from STC.

- **Rugged**
- **Compact**
- **Light-weight**
- **Reliable**
- **Low Cost**

STC COMPONENTS GROUP

60/1 HQ

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, W.C.2.

QUARTZ CRYSTAL DIVISION: HARLOW · ESSEX

WALMORE ELECTRONICS
LIMITED

REPRESENTATIVES IN THE UNITED KINGDOM

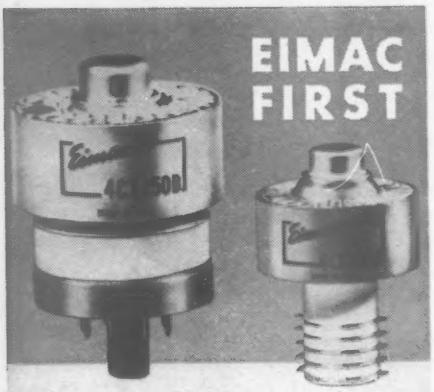

FOR ALL THE PRODUCTS OF

Eimac®

EITEL-McCULLOUGH, INC.
SAN CARLOS, CALIFORNIA.

Covering the Spectrum with Reliable Ceramic Tubes

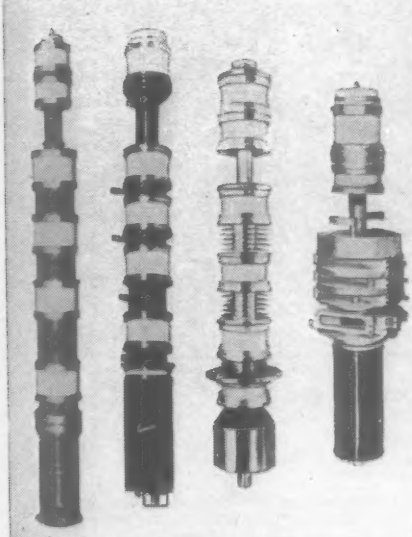

Eimac First with ceramic tubes that can take it

NOW OPERATING FROM THEIR

NEW PREMISES

FROM WHICH EVEN BETTER SERVICE
WILL BE GIVEN TO OUR MANY CUSTOMERS
IN THE UNITED KINGDOM
AND THROUGHOUT THE WORLD

FOR IMMEDIATE INFORMATION
TECHNICAL DATA
QUOTATIONS

WRITE: **WALMORE ELECTRONICS LTD.**
11-15 BETTERTON ST.
DRURY LANE
LONDON, W.C.2

PHONE: TEMPLE BAR 0201-4

TELEX LONDON 28752

Electrical equivalents

FOR THE

807

These STC valves are loctal-based, indirectly-heated, beam-power amplifiers electrically similar to the U.S.A. type 807 but with extra advantages. Little more than half the size of the 807 the electrode assemblies are more compact . . . stronger and more rigid . . . and the glass bulbs less vulnerable. Shorter grid and anode leads, and glass base with miniature-type pins reduce inter-electrode capacitance and improve performance at the higher frequencies. Thus, both mechanically and electrically, they offer a high standard of reliability, which, together with their small size, makes them particularly suitable for use in mobile equipment.

plus these EXTRA advantages

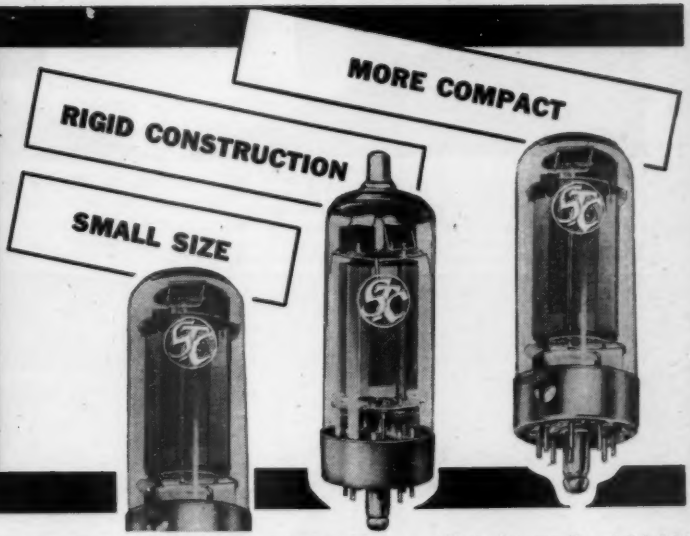

The range of four valves offers a choice of heater voltage:

5B/254M double-ended	5B/255M single-ended	5B/257M single-ended	5B/258M double-ended
6·3V	6·3V	12V	19V
0·9A	0·9A	0·47A	0·3A

Where the overall seated height must be kept as low as possible, the single-ended type 5B/255M may be used, but under conditions of high altitude or anode modulation the double-ended type 5B/254M is to be preferred because of insulation considerations at the valve base. A flying lead version is available under the code 5B/254G.

STC COMPONENTS GROUP

60/7HS

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London W.C.2

VALVE DIVISION: FOOTSCRAY · SIDCUP · KENT

STORNO – SOUTHERN

V.H.F. & U.H.F. Equipment for mobile and point-to-point services

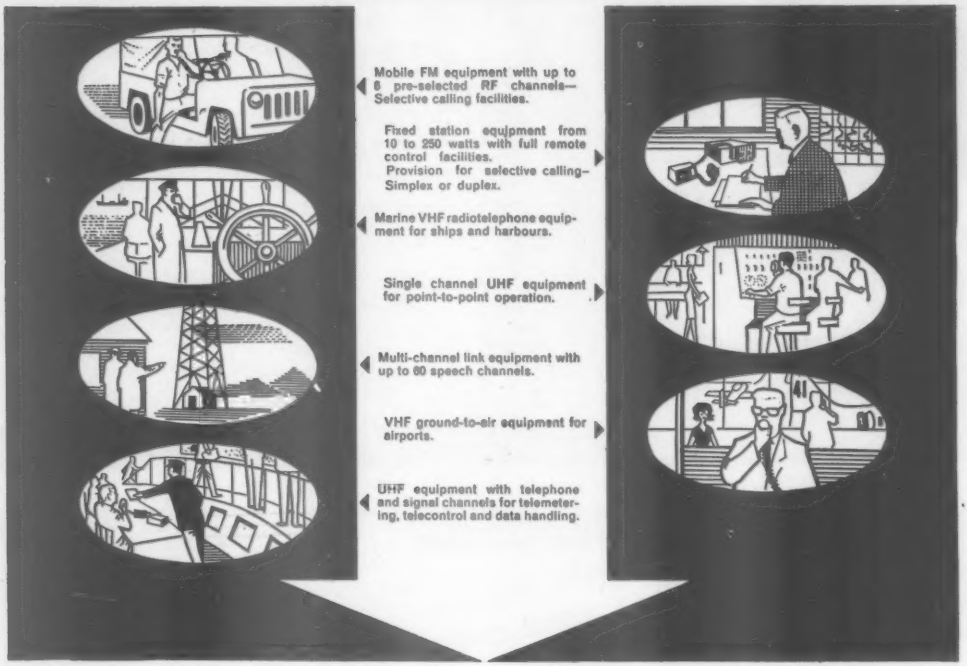
Mobile FM equipment with up to 6 pre-selected RF channels—Selective calling facilities.
Fixed station equipment from 10 to 250 watts with full remote control facilities. Provision for selective calling—Simplex or duplex.
Marine VHF radiotelephone equipment for ships and harbours.
Single channel UHF equipment for point-to-point operation.
Multi-channel link equipment with up to 60 speech channels.
VHF ground-to-air equipment for airports.
UHF equipment with telephone and signal channels for telemetering, telecontrol and data handling.

Mobile VHF/FM radiotelephone 70-88M/cs and 152-174M/cs

Transistorised power supply and pre-amplifier. Type approved by British Post Office for 25 Kc and 50 Kc channel spacing. Exceeds the American EIA (RETMA) Specification. Available with up to six switched crystal controlled channels. 12 watt RF output. Completely splash and dustproof housing of rugged construction. Low power consumption. Independent of the polarity of the battery. Extremely high stability. Suitable for use in any climate. Built-in speech limiter. Dynamic microphone with transistor pre-amplifier. Either 0.6 or 1 watt audio output delivered to a 3in. speaker of high efficiency. Single unit drawer construction. Attractive price and extremely low maintenance costs.

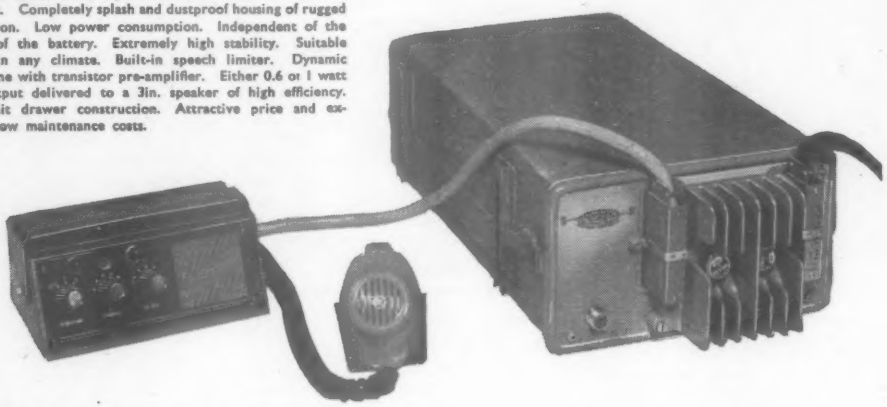

COMMONWEALTH TRADE ENQUIRIES INVITED

STORNO – SOUTHERN LTD

An Associate Company of Southern Instruments Ltd. Camberley and the Storno Company, Copenhagen.

FRIMLEY ROAD CAMBERLEY SURREY TELEPHONE CAMBERLEY 3401

STORNO-SOUTHERN

No. 1 IN THE SERIES

Technical Information for the Transistor Circuit Designer

Switching Performance of Alloy Junction Transistors

There are several possible ways of specifying the switching performance of a transistor, but the most elegant of these involves the parameters τ_C and τ_S. τ_C is a measure of the charge, or quantity of minority carriers, stored on the base of a transistor when it is operated in the active region; τ_S is a measure of the charge stored when the transistor is operated in the saturated, or bottomed, condition.

For example, if τ_C is 0·03 μs, the collector current I_C is 10 mA, and the transistor is being operated in the active region, the charge stored is:

$$\tau_C I_C = 0{\cdot}03 \times 10^{-8} = 0{\cdot}3 \times 10^{-9} \text{ coulombs.}$$

If $I_C = 10$ mA, $\tau_C = 0{\cdot}03$ μs, $h_{FE} = 40$, $\tau_S = 1{\cdot}5$ μs and $I_B = 0{\cdot}5$ mA, there is an excess base current equal to $I_B - \frac{I_C}{h_{FE}} = I_B' = 0{\cdot}5 - 0{\cdot}25 = 0{\cdot}25$ mA. This excess base current acts to drive the transistor into the saturation region and the charge stored is then:

$$I_B' \tau_S + I_C \tau_C = 0{\cdot}92 \times 10^{-9} \text{ coulombs.}$$

With a knowledge of τ_C, τ_S and the collector junction capacitance, the total charge stored in the base region and depletion layer of the transistor can be calculated. Comparisons can then be made between the relative merits of different types of transistors when operated in a specific circuit.

For further details see STC application report No. MK/146, "The Junction Transistor as a Charge Controlled Device" by R. Beaufoy and J. J. Sparkes, A.T.E. Journal, Vol. 13, No. 4, October 1957, and "Transistor Switching Circuit Design using the Charge-Control Parameters" by R. Beaufoy, Proc.I.E.E., Paper No. 2970, May 1959, Vol. 106, Part B.

	Type	τ_C(μs)	τ_S(μs)	$C_{b'c}$(pF)	h_{FE} range	f_{hb}(Mc/s)
STC Switching Transistors	TK28C	0·03	1·5	18	25-54	—
	TK30C	0·053	1·6	20	15-95	6
	TK31C	0·025	1·3	18	25-125	11

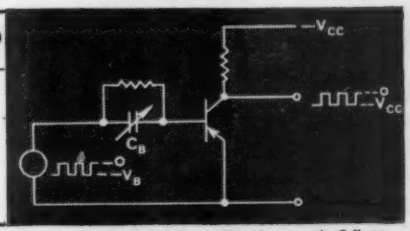

C_B Adjusted to give 'Best' Square Wave Output at the Collector.

Basic circuit for measurement of τ_C and τ_S

With optimum* positive going edge at the collector the charge required to switch on the transistor is

$$Q_{ON} = V_B C_{B1} \simeq I_C \tau_C + 1{\cdot}7\, C_{b'c}\, V_{CC}$$

With optimum* negative going edge at the collector the charge required to switch off the transistor is

$$Q_{OFF} = V_B C_{B2} \simeq I_C \tau_C + I_B' \tau_S + 1{\cdot}7\, C_{b'c}\, V_{CC} = Q_{ON} + I_B' \tau_S$$

*Adjusted for minimum rise or fall time with no overshoot.

STC COMPONENTS GROUP

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, London, W.C.2

TRANSISTOR DIVISION: FOOTSCRAY · SIDCUP · KENT

61/1MK

You need to know what the Russians are doing in the fields of Radio and Electronics

To find out read these translation editions of three leading Russian journals

Radio Engineering

The journal of the Popov Society of Radio Engineering and Telecommunications. Published monthly, the translations are fully illustrated with diagrams, graphs and all the necessary formulae.

Telecommunications

Published by the U.S.S.R. Ministry of Communications. It appears monthly with an average of 10 to 12 articles per issue dealing with the problems of practical engineers.

Radio Engineering and Electronics

The journal of the Institute of Radio Engineering and Electronics of the U.S.S.R. Academy of Sciences. Published monthly it averages 150 pages per issue—some 16 or 17 articles.

Rates on application

Please send for specimen copies for examination

to appear shortly

THEORY OF MICROWAVE VALVES

by **S. D. Gvozdover**

This monograph focuses attention on those microwave devices which have constant use in practice and which can be understood on the basis of one type of oscillation or wave. An exception is made in the tenth chapter which deals with the multicavity magnetron.

80s. net. ($12.50)

PERGAMON PRESS

Headington Hill Hall, Oxford
4 & 5 Fitzroy Square, London, W.1.
122 East 55th Street, New York 22, N.Y.

SOMETHING TO CROW ABOUT

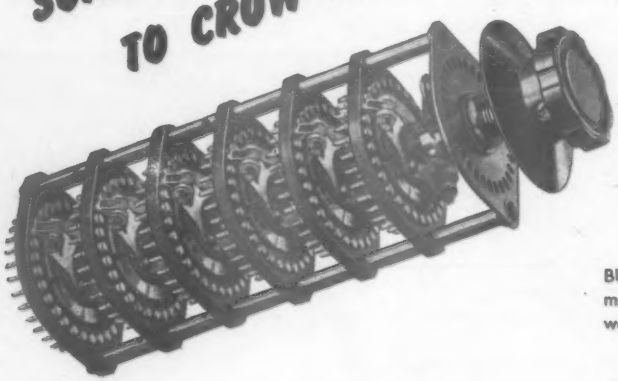

Not just another Rotary Switch

BUT after considerable research and development we can offer all the features that you would wish . . .

A sturdy Multi-bank Switch

+ Instrument quality performance

+ Economic prices

+ Quick delivery

ELCOM TYPE 70

ELCOM

ELCOM, WEEDON ROAD INDUSTRIAL ESTATE
NORTHAMPTON *Telephone 2467*

Also manufacturers of Attenuators, Faders, Quadrant Faders, Vitreous and Precision Wirewound Resistors, Sine/Cosine Potentiometers, Knobs, Dials, Pointers, Plugs, Sockets, Ceramic Components

NEW TV TUNER HIGH SLOPE VHF TETRODE

EDISWAN MAZDA 30F27

The 30F27 is a frame grid VHF tetrode having a mutual conductance of 15 mA/V at an anode current of 13.5 mA and a screen current of 1.7 mA with variable-mu characteristics to reduce cross-modulation effects at high signal levels.

This tetrode used in the RF stage of a television tuner offers certain advantages over the more conventional double triode cascode arrangement. For instance, the number of circuit components required is smaller, the layout is simpler and for valves having comparable slopes the single cathode type valve can be manufactured more economically.

Normally the noise performance of a tetrode is inferior to that of a triode due to the presence of partition noise arising from the screen current. However the 30F27 has been specially designed to provide a low ratio of screen to anode current to minimise the effect of partition noise while still retaining good screening between control grid and anode. When this is used in conjunction with frame-grid techniques a high slope per milliamp of anode current can be obtained resulting in a high gain RF valve with a noise performance much superior to that of a conventional pentode and equal to that of a double triode cascode amplifier such as the 30L1.

Heater Current (amps)	I_h	0.3
Heater Voltage (volts)	V_h	3.7

TENTATIVE RATINGS AND DATA

Maximum Design Centre Ratings

Anode Dissipation (watts)	$p_{a(max)}$	2.5
Screen Dissipation (watts)	$p_{g2(max)}$	0.4
Anode Voltage (volts)	$V_{a(max)}$	250
Screen Voltage (volts)	$V_{g2(max)}$	230
Heater to Cathode Voltage (volts rms)	$V_{h-k(max)}$ rms	90*
Cathode Current (mA)	$I_{k(max)}$	18

* From cathode to higher potential heater pin.

Inter-electrode Capacitances (pF)†

Input Capacitance	c_{in}	6.3
Output Capacitance	c_{out}	1.8
Grid 1 to Anode	c_{g1-a}	0.027
Grid 1 to Grid 2	c_{g1-g2}	2.0
Grid 1 to Cathode	c_{g1-k}	4.0

† Measured in fully shielded socket, without can.

Maximum Dimensions (mm)

Overall Length	56
Seated Height	49
Diameter	22.2

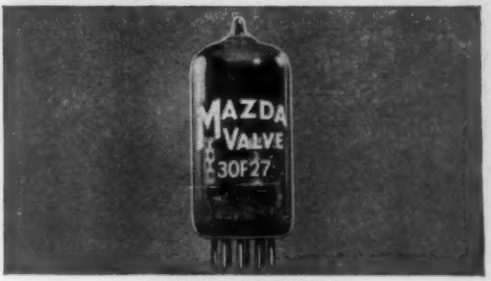

TYPICAL OPERATION

		Cathode Self Bias Circuit	Grid Current Bias Circuit
Supply Voltage (volts)	V_b	200	200
Anode Voltage (volts)	V_a	170	150
Screen Voltage (Initial) (volts)	V_{g2}	140	105
Anode & Screen Common Decoupling Resistor (kΩ)		—	3.3
Anode Decoupling Resistor (kΩ)		2.2	—
Screen Decoupling Resistor (kΩ)		33	33
Cathode Bias Resistor (Ω)	R_k	82	—
Grid Current Bias Resistor (kΩ)	R_{g1}	—	330
Grid Bias Voltage approx. (volts)	V_{g1}	−1.25	—
Anode Current (mA)	I_a	13.5	14
Screen Current (mA)	I_{g2}	1.7	1.4
Mutual Conductance (mA/V)	g_m	15	15.5
Inner Amplification Factor (g_1 to g_2)	μ_{g1-g2}	60	—
Equivalent Grid Noise Resistance (Ω)	R_{eq}	450	—
Input Loss at 50 Mc/s (kΩ)	$r_{g1-k(w)}$	6.8¶	—
Input Capacity Working (pF)	$c_{in(w)}$	10.3§¶	—
Change in Input Capacity produced by biasing valve to cut-off (pF)	$\triangle c_{in(w)}$	2.9¶	—

¶ Measured at 50 Mc/s with the three cathodes strapped and taken directly to earth.

§ Inter-electrode capacity with holder capacity balanced out.

Tentative Characteristic Curves of Ediswan Mazda Valve Type 30F27

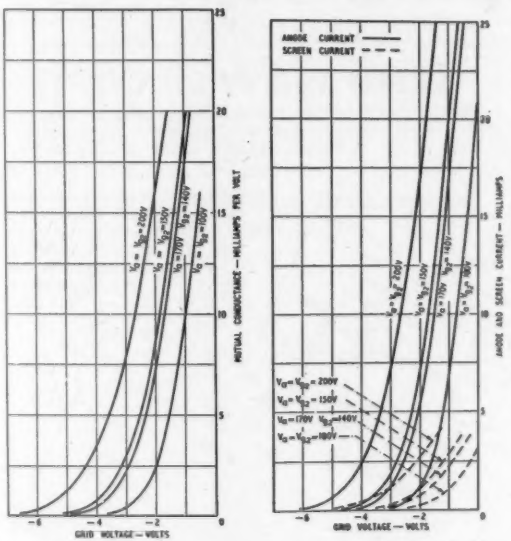
MUTUAL CONDUCTANCE — MILLIAMPS PER VOLT
GRID VOLTAGE — VOLTS
ANODE AND SCREEN CURRENT — MILLIAMPS
ANODE CURRENT
SCREEN CURRENT
GRID VOLTAGE — VOLTS

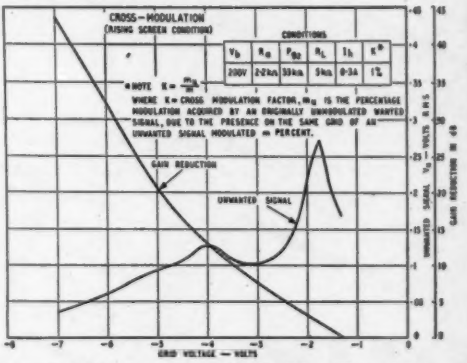

Base: B9A (Noval) **Mounting Position:** Unrestricted





Associated Electrical Industries Ltd
Radio and Electronic Components Division
Technical Service Department
155 Charing Cross Road, London, W.C.2
Tel: GERrard 9797. Grams: Sieswan, Westcent, London

EDISWAN
MAZDA

When you're buying sound
YOU'LL LIKE THE SOUND OF

DULCI

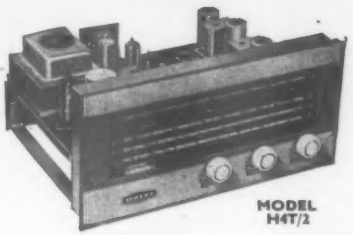

MODEL H4T/2

MODEL FMT/2
HIGH-FIDELITY FM (VHF) TUNER
(Self-powered)
Incorporates all features and refinements for perfect reception, reliability in use, simplicity in operation, and ease of installation. Exclusive Automatic Frequency Control. High sensitivity for fringe area reception. Power Supply: 115-240 v. A.C. Dimensions: 12¼in. x 3¼in. x 9¼in. Weight 7lb. Price: £18 13s. 6d. plus P.T.

MODEL H4T/2
HIGH-FIDELITY AM/FM TUNER
(Self-powered)
Clear clean reception of the B.B.C. high-fidelity transmissions on VHF/FM band plus world-wide reception on long, medium and short wave-bands. High sensitivity and suitability in addition to a clean layout and attractive design and finish. Mains supply: 110-250 v. A.C. Dimensions: 12¼in. x 6½in. x 10½in. Weight: 12 lb. Price £19 10s. plus P.T.

ALSO AVAILABLE
Model DPA. 10 Mono Amplifier
Model Stereo 2 Twin Channel Pre-amp.
Model Stereo 8 Twin Channel Pre-amp.
Model DPA. 10 Mono Pre-amp.
Model SP.44 Stereo Amplifier

Fully illustrated and descriptive leaflets on request from
LEE PRODUCTS (Gt. Britain) LTD. ELPICO HOUSE, LONGFORD ST., LONDON, N.W.1. Telephone: EUSton 5754 (all lines)

TAKE YOUR PICK

Our wide range of capacitors, incorporating all the latest developments, are described fully in these new leaflets . . .

SEND NOW for COPIES

DALY has succeeded in maintaining full capacity values and working voltages in more compact designs, specially suited to ultra modern equipment :—

PHOTO-FLASH EQUIPMENT • DEAF AIDS
PRIVATE TELEPHONE INSTALLATIONS
AMPLIFIERS • D.C. POWER UNITS
TRANSISTOR EQUIPMENT
MAGNETISATION EQUIPMENT
TEST GEAR

DALY
ELECTROLYTIC
CAPACITORS
Condenser Specialists for over 20 years.

DALY (Condensers) LTD., WEST LODGE WORKS,
THE GREEN, EALING, LONDON, W.5. Phone: Ealing 3127-8-9. Cables: Dalcyon, London

NEW B9A EFFICIENCY DIODE

EDISWAN MAZDA U193

The U193 is a new Efficiency Diode, designed for use in line deflection stages of television receivers using 110° and 114° cathode ray tubes and has a maximum peak heater to cathode voltage rating of 5.5 kV as compared with 5 kV for the U191.

The valve is mounted on a B9A (noval) base with the cathode brought out to a top cap connection.

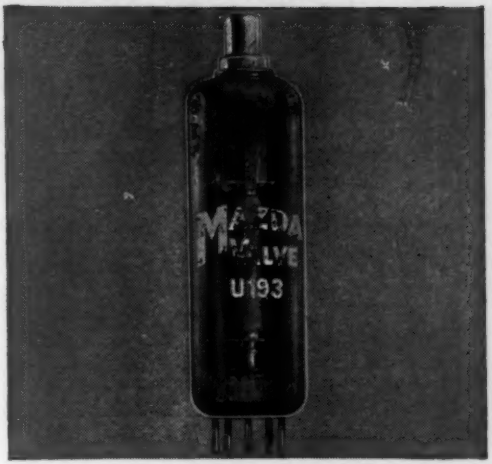

MAXIMUM DIMENSIONS (mm)

Diameter	22.2
Seated Height	75
Overall Length	82

TENTATIVE RATINGS AND DATA

Heater Current (amps) I_h	0.3
Heater Voltage (volts) V_h	19

Maximum Design Centre Ratings

Mean Anode Current (mA)	$I_{a(av)max}$	150
Peak Anode Current (mA)	$i_{a(pk)max}$	450
Peak Inverse Voltage (kV)	$PIV_{(max)}$	5.5*
Peak Heater to Cathode Voltage (heater negative) (kV)	$V_{h-k(max)}$	5.5*

*Rated for TV line scan where the duty cycle does not exceed 15% and the pulse duration does not exceed 15μs. An absolute rating of 6.6 kV must not be exceeded.

Inter-Electrode Capacitances (pF)

Anode to Heater and Cathode	$C_{a-h_2\,k}$	6.6
Cathode to Heater and Anode	$C_{k-h_2\,a}$	7.9

APPLICATION NOTES

The Ediswan Mazda U193 is designed specifically for use as the efficiency diode in line defletion stages of television receivers using 110° and 114° cathode ray tubes. It would normally be used in conjunction with line scanning output valves such as the 30P4 and 30P19 in energy recovery types of line scanning circuits in a.c./d.c. television receivers. The heater may be directly connected in the normal series chain as the insulation between heater and cathode is adequate to withstand the pulse voltages encountered in auto-transformer scanning circuits. This high voltage insulation generally results in high thermal inertia of the cathode, giving a much longer heating time than the remaining valves in a television receiver. In the U193, however, the thermal inertia, has been reduced considerably so that there is only a delay of a few seconds between the warm-up of other valves in a receiver and the start of operation of the line scanning circuits. Besides reducing the waiting time for a picture to appear, this factor also alleviates problems of protection of valves where a line-gated system of automatic gain control is used.

See "Aspects of Design No. 20 ('Wireless World' March 1960)—Efficiency Diodes for TV Line Output Stages" for notes on circuit considerations and limiting ratings.

Mounting Position: Unrestricted

Base: B9A (Noval) **Top Cap:** CT1—Cathode Connection



VIEW OF FREE END

Characteristic Curve of Average Ediswan Mazda Valve Type U193

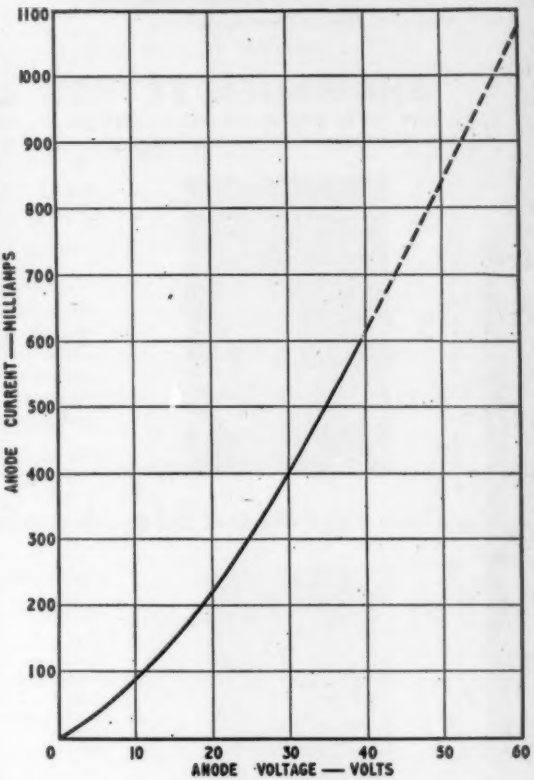

Associated Electrical Industries Ltd
Radio and Electronic Components Division
Technical Service Department
155 Charing Cross Road, London, W.C.2
Tel: GERrard 9797. Grams: Sieswan, Westcent, London

EDISWAN
MAZDA

REMINDING ALL USERS OF

WIRE

(FROM COIL WINDERS TO CABLE MAKERS)

of the NEW range of improved performance

VERY HIGH SPEED – QUICK START TENSIONERS & DE-REELERS (PATENTED)

For all winding of coils, transformers, motors, relays resistances. ALSO plastic extruding, tinning, bunching enamelling

Offering THESE ADVANTAGES:

★ STATIONARY SUPPLY REEL MEANS TENSION IS INDEPENDENT OF WEIGHT OF REEL.

★ MUCH FASTER SPEEDS DUE TO MINIMUM OF INERTIA.

★ PATENTED CLUTCH: PERMITS FAST STARTS AND STOPS; GIVES A CONSTANT REVERSIVE PULL, KEEPS WIRE TIGHT BUT UNSTRAINED DURING WINDING; PREVENTS OVER-RUNNING WHEN STOPPING.

★ NO REEL SIZE IS TOO LARGE.

★ TENSION QUICKLY ADJUSTABLE TO FINE LIMITS.

★ ELIMINATES WIRE BREAKING OR STRETCHING.

USED BY MOST LEADING ELECTRICAL MANUFACTURERS IN GREAT BRITAIN INCLUDING A.E.I. Ltd. De Havilland, Electrolux, English Electric, E.M.I., G.E.C., Joseph Lucas Plessey, S. Smith & Sons, Sperry Gyroscopes Standard Telephones & Cables Pirelli General Cable Co.

SPEEDS UP TO 4,300ft. per min. (1,433 metres per min.) on Light Duty and 40 000 yds. or metres per hour on the Heavy Duty. There is also a Semi-Heavy Duty model.

OVERSEAS AGENCIES OFFERED

SHAWNDEL "LIGHT DUTY" (34/52 SWG)

WIRES ·0076"/·0008" (·193/·019mm)

ALSO A SEMI-HEAVY" WIRES ·014"/·004" (·376/·102mm)

SHAWNDEL NEW "HEAVY DUTY" 16/38 SWG)



WIRES ·064"/·006" (1·63/·152mm)

SHAWNDEL FLYERS LTD

DEPT. WW/1/61 OLYMPIA HOUSE, 72, QUEEN ST., MAIDENHEAD, BERKS, ENG. *Tel: Maidenhead 890 & 5723*



BASIC MATHEMATICS FOR RADIO & ELECTRONICS

by F. M. Colebrook, B.Sc., D.I.C., A.C.G.I.

revised and enlarged by J. W. Head, M.A. (Cantab.)

The first six chapters present a complete course in fundamental mathematics for engineering students of all kinds, both those who need a refresher course and those without previous knowledge. There is a chapter covering the application of mathematics to radio, and other subjects covered include Stability, Linear Differential Equations, Elementary Statistics, Short Cuts to Numerical Calculations and an Introduction to Matrices.

17s 6d net *by post* 18s 6d 359 *pp.* 3*rd edition.*

invaluable books for students



FOUNDATIONS OF WIRELESS

M. G. Scroggie, B.Sc., M.I.E.E.

Covers the whole basic theory and, starting from the most elementary principles and assuming no previous knowledge on the reader's part, deals with receivers, transmitters, amplification, valves, transistors, aerials, power supplies and transmission lines. The treatment of frequency chargers has been written from the standpoint of modern practice, while earth-grid and cascade v.h.f. amplifiers, colour television, television, e.h.t. generations and raisers are also covered.

16s net *by post* 17s 4d 388 *pp.* 278 *diagrams.* 7*th edition.*

from all booksellers

Published for WIRELESS WORLD by

Iliffe Books Ltd., Dorset House, Stamford Street, London, S.E.1

NEW VERY HIGH SLOPE VARIABLE-MU HF PENTODE

EDISWAN MAZDA 6F25

The 6F25 is a frame grid variable-mu HF pentode having a mutual conductance of 12.5mA/V at 11.5mA anode current. This valve is capable of handling large input signals without cross-modulation and is therefore very suitable as the common IF amplifier in a.c. or a.c./d.c. television receivers.

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.3

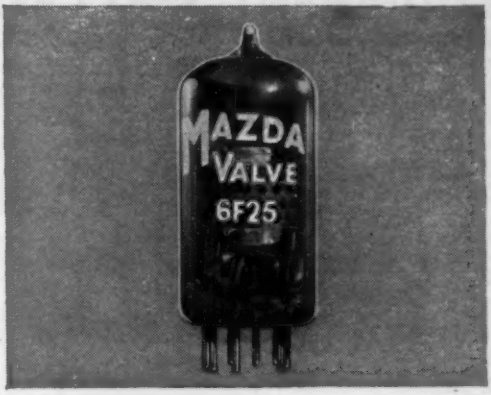

TENTATIVE RATINGS AND DATA

Maximum Design Centre Ratings

Anode Dissipation (watts)	$p_{a(max)}$	2.5
Screen Dissipation (watts)	$p_{g2(max)}$	0.5
Anode Voltage (volts)	$V_{a(max)}$	250
Screen Voltage (volts)	$V_{g2(max)}$	250
Heater to Cathode Voltage (volts rms)	$V_{h-k(max)rms}$	150*
Resistance Control Grid to Cathode (megohms)	$R_{g-k(max)}$	1

*From cathode to higher potential heater pin.

Inter-Electrode Capacitances† (pF)

Input Capacitance	c_{in}	8.5
Output Capacitance	c_{out}	2.7
Grid 1 to Anode	c_{g1-a}	0.006
Grid 1 to Grid 3	c_{g1-g3}	0.1
Grid 1 to Grid 2	c_{g1-g2}	1.8
Grid 1 to Cathode	c_{g1-k}	6.0
Grid 2 to Anode	c_{g2-a}	0.19
Grid 3 to Anode	c_{g3-a}	0.45

†Measured in fully shielded socket, without can.

Base: B9A (Noval) **Mounting Position:** Unrestricted



VIEW OF FREE END



TYPICAL OPERATION

Supply Voltage (volts)	V_b	200
Anode Voltage (volts)	V_a	170
Screen Voltage-Initial (volts)	V_{g2}	90
Screen Resistor (kΩ)	R_{g2}	39
Cathode Bias Resistor (ohms)	R_k	100
Anode Current (mA)	I_a	11.5
Screen Current (mA)	I_{g2}	2.8
Inner Amplification Factor (g_1 to g_2)	μ_{g1-g2}	35
Mutual Conductance (mA/V)	g_m	12.5
Grid Voltage for Mutual Conductance =1.25 mA/V (volts)	—	—5.5

Tentative Characteristic Curves of Ediswan Mazda Valve Type 6F25

RISING SCREEN CHARACTERISTICS

TEST CIRCUIT



C= DECOUPLING CAPACITORS

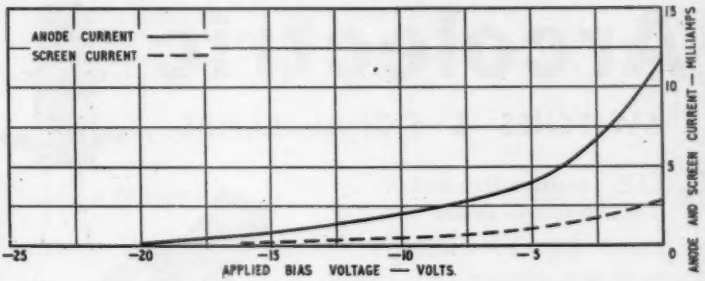

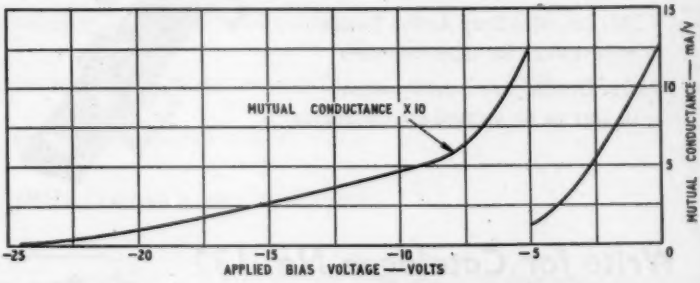

Maximum Dimensions (mm)

Overall Length	56
Seated Height	49
Diameter	22.2

Associated Electrical Industries Ltd
Radio and Electronic Components Division
Technical Service Department
155 Charing Cross Road, London, W.C.2
Tel: GERrard 9797. Grams: Sieswan, Westcent, London

EDISWAN
MAZDA

LONDON'S LEADING STOCKISTS OF EQUIPMENT • ACCESSORIES • MATERIALS

GOODS SENT TO ALL PARTS OF THE WORLD

MASTER LINK TAPE UNIT M2A AND COLLARO "STUDIO" DECK

Build your own Hi-Fi Tape Equipment using our tape pre-amp and the new Collaro deck.

INC. PRICE 41 gns. Carr. extra. Complete with instructions.

The M2A is complete with external power-pack and is also suitable for use with Wearite and Brenell decks. C.C.I.R. Characteristic.

PRICE 27 Gns. Plus P. & P. 4/-. *Leaflet on request.*

PNEUMATIC LID STAY with pressure adjuster. Heavy duty, 10/- complete. P. & P. 1/6.

SPECIAL OFFERS!

1. "ROLA" 7 x 4in. elliptical speaker. 3–5 ohms. ONLY 13/6. P. & P. 1/6.
2. Mains Transformer. Drop through. Primary 0-200-10-20-30-50. Secondary 300-0-300 v. at 70 mA., 6.3 v. 2.4 A. 15/6. P. & P. 2/3.
3. Choke 10H 250 mA. Potted "C" Core, 25/-.
4. Choke 20 H 50 mA. Potted, 15/-.
5. Choke 16H 120 mA. Potted "C" Core. 20/-.
6. Choke 5H 100 mA. Potted, 5/6.
7. Choke 5H 300 mA. Potted, 12/6.
8. Rectifier 300 v. 300 mA., 13/6.
9. R.F. Chokes 4MH Pot cored, 7/6.

JASON CONSTRUCTIONAL KITS

"EVEREST" PORTABLE RADIO. Super model, 7 transistors with 3 gang tuning and RF stage, efficient speaker and attractive case. Kit £15/18/9. P. & P. 3/6.

"MERCURY." Switched FM/BBC/ITV TV tuner of simple design with AFC for cabinet mounting. Price of complete kit with valves less power pack, £11/14/6. (Power Pack kit £2/14/- extra.) P. & P. 3/6.

AUDIO GENERATOR AG.10. Capacity tuned Wien bridge gives good stability from 10 c.p.s. to 100 kc/s. sine/square wave output. Kit £15/19/-. P. & P. 3/6.

OSCILLOSCOPE QG.10. Push-pull scan on X and Y plates with an X bandwidth of 10 c.p.s. to 1.5 Mc/s. ± 1dB. Kit £22/10/-. P. & P. 3/6.

ATTENUATOR A.A.10. Calibrated in dB giving any reading between 1dB and 110dB. Uses 1% resistors. Kit £7/15/-. P. & P. 3/6.

CRYSTAL CALIBRATOR CC.10. Complete with crystal oscillator and audio output, so that signal generators in the range of 100 kc/s.–200 Mc/s. may be accurately checked. Kit £19/19/-. P. & P. 3/6.

VALVE VOLTMETER EM.10. A four-valve bridge circuit. May be used as a general purpose meter since there are 23 ranges including D.C. current ranges. Kit £18/10/-. P. & P. 3/6.

W.11 WOBBULATOR KIT. Produces a frequency modulated signal for alignment of F.M./A.M. including 465 kc/s. I.F. and T.V. Sound and Picture channels, £14/19/-. P. & P. 3/6.

LARGE STOCKISTS OF

COMPONENTS & EQUIPMENT

by well-Known Manufacturers including:—

• A.B. METAL PRODUCTS • AVO • BELLING-LEE • BULGIN • COLVERN • DUBILIER • ERIE • MORGANITE • MULLARD • PAINTON • T.C.C. • WELWYN • WESTINGHOUSE

STEEL METER CASES

4 x 4 x 4in. Sloping Front		9 5
5 x 5 x 8in. Sloping Front		14 11
6 x 6 x 12in. Sloping Front	£1	4 9
4 x 4 x 2½in. Rectangular		6 8
6 x 4 x 3in. Rectangular		8 10
8 x 6 x 3in. Rectangular		11 0
10 x 6 x 2½in. Rectangular		13 3
10 x 7 x 7in. Alum. Panel	£1	4 9
12 x 7 x 7in. with Alum. Panel	£1	11 5
14 x 7 x 7in. with Alum. Panel	£1	15 9
14 x 9 x 8in. with Alum. Panel	£2	5 8
16 x 9 x 8in. with Alum. Panel	£2	9 6
16 x 11 x 8in. with Alum. Panel	£2	16 8
19 x 11 x 10in. with Alum. Panel	£3	3 10

ALSO FULL RANGE OF CHASSIS

Chassis and Case List Free on request.

ROTARY WAFER SWITCHES
A.B. Metal and N.S.F. Made to order. Price list free on request.

Immediate dispatch of goods available from stock.

Carriage charged extra at cost.

TELE-RADIO (1943) LTD

189 EDGWARE ROAD, LONDON, W.2

Phone : PAD 4455/6 Our only address ● Few mins from Marble Arch ● Open all day Sat.

Arcolectric

SWITCHES & SIGNAL LAMPS

T.225: Miniature Slide Switch
D.P. change-over switch

S.L.166: Very small low cost
mains neon indicator

T.280: Sensitive Snap Action Switch
Popular switch for tape recorders

T.626: Double pole 3-AMP switch
with tags to fit printed circuit boards


S.L.166

T.225

T.280


T.626

Write for Catalogue No. 132

ARCOLECTRIC SWITCHES · LTD

CENTRAL AVENUE, WEST MOLESEY, SURREY. TEL.: MOLESEY 3232

Another outstanding new Ediswan valve

with a CV4000 specification

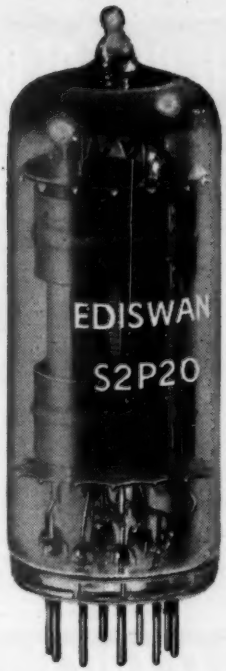

The EDISWAN S2P20 (CV4097)
Filamentary Beam Tetrode

Here is a new special quality Filamentary Beam Tetrode with a really low anode voltage, for use as an RF Power Amplifier at frequencies up to 100 Mc/s.
Instantaneous filament heating enables the valve to be switched off during non-duty periods, which makes it particularly suitable for use in battery operated portable equipment. Its specially rugged construction enables the valve to withstand continuous vibration at 2.5 g and a short duration shock of 500 g.

MAIN PARAMETERS ARE AS FOLLOWS:—

V_f	Filament Voltage (volts)	2.5 or 5.0
P_f	Filament Power (watts)	1.15
$V_{a\,(max)}$	Anode Voltage, maximum (volts)	150
$V_{g2\,(max)}$	Screen Voltage, maximum (volts)	150
g_m	Mutual Conductance (mA/V)	4.3
$P_{a\,(max)}$	Anode Dissipation, maximum (watts)	5.0

AEI

Associated Electrical Industries Limited
Radio and Electronic Components Division
Industrial Valves and Cathode Ray Tubes Department
155 Charing Cross Road, London, W.C.2.
Telephone: GERrard 9797. Telegrams: Sieswan Westcent London
CRC 16/11

WE SEND THE BEST OF BRITAIN'S HI-FI EVERYWHERE

EVERYTHING FOR RADIO, RECORD & TAPE

- PROMPT DESPATCH SERVICE
- HOME AND EXPORT ENQUIRIES WELCOME AT ALL TIMES
- 110 VOLT ITEMS AVAILABLE

★ RECORDERS

Vortexion W.V.A.	£93 13 0	$267
Vortexion W.V.B.	£110 3 0	$315
Brenell Mk. V	64 gns.	$192
Brenell 3 Star Stereo	89 gns.	$267
Clarion Transistor	25 gns.	$75
Cossor 1601 4 Tr.	37 gns.	$111
Cossor 1602 4 Tr. 3 spd.	59 gns.	$127
Simon Minstrelle	39 gns.	$117
Ferrograph 4AN	81 gns.	$243
Ferrograph 4AH	86 gns.	$258
Ferrograph 808 Stereo	105 gns.	$315
Grundig TK60 Stereo	128 gns.	$384
Grundig TK55 Stereo	92 gns.	$276
Grundig TK20 with Mic.	42 gns.	$126
Grundig TK24	55 gns.	$165
Grundig TK30	65 gns.	$195
Philips 4 Track	59 gns.	$117
Philips 4 Track Stereo	92 gns.	$276
Philips 4 Track	34 gns.	$102
Reflectograph 'A' ½ Tr.	95 gns.	$285
Reflectograph 'B' 4 Tr.	105 gns.	$315
Stuzzi Magnette	69 gns.	$207
Stuzzi Tri-corder	75 gns.	$225

★ DECKS

Wearite 4A	£36 10 0	$105
Wearite 4B	£41 10 0	$119
Brenell Mk. V	28 gns.	$84
Brenell Stereo Deck	£33 16 0	$101
Brenell Pre-Amp. and Amp.	£24 0 0	$69

Microphones by Lustraphone, Reslo, Acos, Simon, etc.

PLEASE NOTE—Prices subject to alteration in accordance with any which may be made by manufacturers at time of receipt of order.

- TAPES BY ALL LEADING MAKERS

★ SPEAKER SYSTEMS

Quad Electrostatic	£52 0 0	$149
Wharfedale SFB/3	£39 10 0	$113
Wharfedale Coaxial 12	£25 0 0	$156
Wharfedale Golden 10	£8 14 11	$18
Tannoy 12in. Monitor	£30 15 0	
Tannoy 15in. Monitor	£37 10 0	
WB. 1016	£7 12 3	$16
Goodmans AL.120	£29 10 0	$84
Goodmans AL.100	£23 10 0	$67
Goodmans Triaxiom	£25 0 0	$72
Goodmans 300	£11 5 9	$32
Goodmans 400	£16 17 0	$46
Kelly Ribbon Mk. II	£10 10 0	$30
B. J. Tweeter complete	£5 5 0	$11

★ MOTORS AND PICK-UPS

Decca Stereo P.U.	£21 0 0	$45
Lenco GL60 Trans. Unit	£28 19 2	$62
Lenco GL58/R, Stereo P.U.	£29 3 10	$62
Garrard 301	£22 7 3	$54
Garrard 4HF/Stereo P.U.	£19 17 7	$41
Garrard TA/Mk. II	£9 15 8	$22
Connoisseur Motor Type 'B'	£27 16 1	$63
Connoisseur, 2 sp. Motor	£16 3 1	$36
Goldring 700	£9 14 9	$21
Ronette DC284	£4 3 5	$9

★ AMPLIFIERS & TUNERS

Quad 22-Control Unit	£25 0 0	$73
Quad II Amplifier	£22 10 0	$65
Leak Stereo 20 Amp.	£30 9 0	$87
Leak Point One Pre-Amp.	£21 0 0	$60
Rogers Junior Stereo	£28 10 0	$81
Rogers Master Stereo Unit	£35 0 0	$100
Quad FM Tuner	£28 17 6	$60
Chapman AM/FM	£29 8 0	$60

Enquiries for all items by firms mentioned in this advertisement invited.

BINSON "ECHOREC"

Distributed exclusively by Modern Electrics Ltd. (see W.W. Feb. page 92). For superimposing controlled echo on to any audio signal. Compact, fully portable instrument, with three working channels, echo interval is variable, swell and other effects are obtainable.

ABRIDGED DESCRIPTION

- Three inputs and outputs.
- Push-button channel selection for 1, 2 or 3 channels.
- Controls for echo intervals, volume of echo, swell effect, volume level on input channels, etc.
- Complete with fitted carrying case, leads, plugs. A.C. mains.

Professional Discounts

140 gns. $420 Leaflet on request. Trade enquiries invited.

BINSON "BABY ECHOREC"

Similar to above but for single channel working 80 gns. $240

ATTENTION!

Ecrivez nous en français S.V.P.
Schreiben Sie uns bitte auf Deutsch.
Escrivanos en español por favor.

MODERN ELECTRICS, (RETAIL) LTD.

We carry extensive up-to-date stocks of equipment, components and accessories by Britain's leading makers. Enquiries dealt with by return

164 CHARING CROSS ROAD, LONDON, W.C.2

(3 shops from Tottenham Court Road Station Underground)

Tel.: TEM 7587 & 00V 1703 Cables: MODCHAREX, LONDON

A. C. SOLENOID type SAM



Now fitted with stainless steel guides—six times the life.
Continuous 14 ozs. at ¾".
Instantaneous to 5¼ lbs.
Larger and smaller sizes available.

Also — Transformers to 7 kVA 3 phase.

R. A. WEBBER LTD.

18, FOREST ROAD, KINGSWOOD, BRISTOL. Phone: 67-4065

SOCKET SCREWS?

We are specialist distributors and can offer quick delivery of all threads, including B.A. and Unified.

Olivers
SOCKET SCREWS LTD

MOUNT PLEASANT, LEYLAND, LANCS.
Phone: Leyland 21202.

For Safety's Sake use AVO Prodclips

Patent No. 748811

Safety first every time with these patented spring-loaded AVO Prodclips.

Cleverly designed for use as insulated prods, they are invaluable for reaching and holding test points which are difficult of access.

Suitable for use with AvoMeter, Multiminor and Avo Electronic Test Meter Leads.

Post Free 15/- per pair

AVO LTD AVOCET HOUSE . 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1.

VICtoria 3404 (12 lines)

A MEMBER OF THE METAL INDUSTRIES GROUP OF COMPANIES

RESLOSOUND LTD

(member of the Derritron Group)

for the highest quality sound reproduction

RIBBON & DYNAMIC MICROPHONES*

IMPEDANCE

DPL	30 ohms	CRL	30/50 ohms
DPM	250 and 600 ohms	CRM	250 and 600 ohms
DPH	30 ohms and high impedance	CRH	30/50 ohms and high impedance

** Produced with 26 years of specialised knowledge*

DYNAMIC
TYPE DP
Head only with baffle

RIBBON
TYPE CR

BEME TELECOMMUNICATIONS LTD

(member of the Derritron Group)

NEW TRANSISTOR

RADIO TELEPHONE

TYPE C502

- Power output 20 watts
- Average range over water 300 miles
- Five crystal-controlled channels
- 3 Tunable wave bands, all with D/F facility
- New design remote D/F aerial
- Simplified controls
- Unit construction—dimensions 12in x 12in x 7in

complete range of marine radio equipment will be shown on **STAND UM 34** *International Boat Show*

DERRITRON Electronics GROUP

BEME TELECOMMUNICATIONS LTD · CHAPMAN ULTRASONICS LTD

DORAN INSTRUMENT CO. LTD · L.S.B. COMPONENTS LTD · RESLOSOUND LTD

Sales enquiries for all companies: **24 Upper Brook Street, London, W.1** *Telephone* **Hyde Park 2291**

Da161WW



WEBB'S Radio

. . . for useful "Odds & Bobs"

"EDI-TAIL" Tape Splicer, a new and excellent aid to clean splicing	10 6
"ANTEX" Miniature Soldering Iron, choice of 5 replaceable bits 1/25in. to 3/16in.	£1 9 6
"MULTICORE" Solder ..... 6d., 2/6, 5/- & 15/-	
PHILIPS insulated screw-driver and Neon tester 110/380 v. A.C. or D.C.	5 0
"EMICASE" Polystyrene transparent containers for tape storage:	
7in.	4 0
5¾in.	3 6
5in.	3 6

"SAFEBLOC," a quick but safe means of connecting to mains without a plug. Useful for service and experiment	£1 17 6
"AURIOL" Pick-up control and groove locator. Standard model with fixed arm	£3 3 0
Swivel arm model for auto changer and awkward cabinets	£3 16 8
"WALGAIN" Transistor pre-amp.; high gain, low noise, MONO model £5. STEREO/MONO	£7 10 0
WEARITE Defluxer for depolarising heads of ALL makes of tape recorders, reduces hiss and background noise	£2 10 0
W.B. "T.359" an inexpe. sive 3in. cone tweeter unit, 9,000 gauss. Frequency response 3,000-15,000 c.p.s.	£1 4 10
P. Tax.	8 5
	£1 13 3
GRAMPIAN "DP4" Dynamic Microphone. Frequency response 50-15,000 c.p.s.	
DP4/L 25 ohms impedance	£7 11 0
DP4/M 600 ohms impedance	£8 11 0
Swivel holder and base	£1 8 4

Webb's unrivalled stocks cover everything from a replacement stylus upwards. Attractive Hire Purchase terms available.

WEBB'S RADIO

14 SOHO ST., OXFORD ST., LONDON, W.1.

Telephone: GERrard 2089

Shop hours:
9 a.m. to 5.30 p.m. (7 p.m. Thursday), 9 a.m. to 1 p.m. Saturdays.

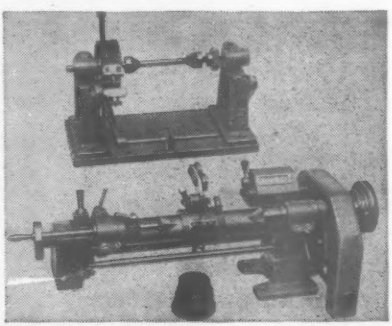

MODEL 'E' SEMI-AUTOMATIC COIL WINDING MACHINES

Model 'E' is a new addition to the famous range of Eta Coil Winding Machines. It will wind coils 6in. x 6in. also may be arranged to wind Flat Resistance Strips up to 6in. long.

A large diameter Lead-screw gives the feed great accuracy and runs in Ball-Races. The reverse is manual and only One Gear needs changing for the alteration to feed.

A Heavy Duty Revolution Counter with Five Figures and Reset.

The machine is heavily built and will wind much larger wires if required. Price on application.

ETA TOOL CO. LTD.

29a WELFORD ROAD, LEICESTER

Phone: Leicester 56386 Grams: Leicester 56386.

Valradio

TRANSISTORISED D/C CONVERTERS

- High efficiency—over 80%.
- One to 400 watts from 12 v. battery.
- 50 or 400 cycles output ● Small and compact

Existing or planned AC Mains equipment can be operated from low voltage input. In many cases Valradio Converters are small enough for immediate adaption into existing instruments.

Valradio

For full details contact:

VALRADIO LIMITED

Dept. WWC · Browells Lane · Feltham Middlesex Tel: Feltham 4242

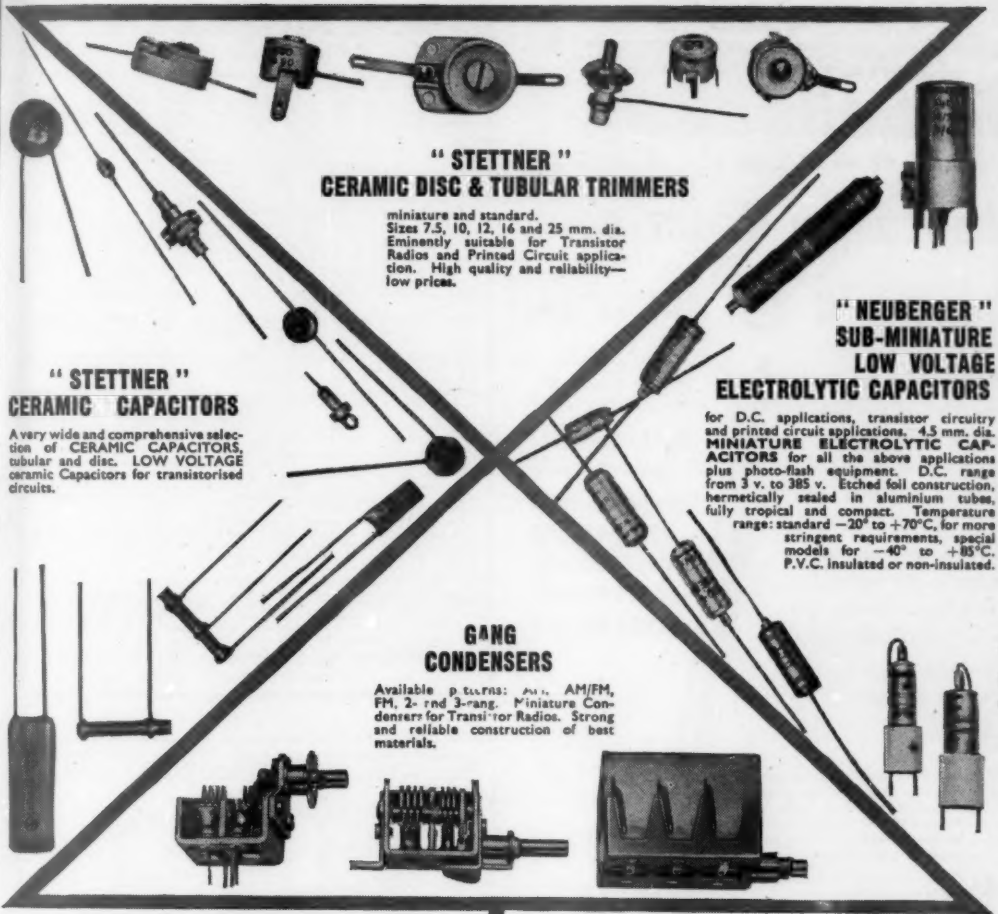

"STETTNER"
CERAMIC DISC & TUBULAR TRIMMERS

miniature and standard.
Sizes 7.5, 10, 12, 16 and 25 mm. dia. Eminently suitable for Transistor Radios and Printed Circuit application. High quality and reliability—low prices.

"STETTNER"
CERAMIC CAPACITORS

A very wide and comprehensive selection of CERAMIC CAPACITORS, tubular and disc. LOW VOLTAGE ceramic Capacitors for transistorised circuits.

"NEUBERGER"
SUB-MINIATURE LOW VOLTAGE ELECTROLYTIC CAPACITORS

for D.C. applications, transistor circuitry and printed circuit applications. 4.5 mm. dia. **MINIATURE ELECTROLYTIC CAPACITORS** for all the above applications plus photo-flash equipment. D.C. range from 3 v. to 385 v. Etched foil construction, hermetically sealed in aluminium tubes, fully tropical and compact. Temperature range: standard −20° to +70°C, for more stringent requirements, special models for −40° to +85°C. P.V.C. insulated or non-insulated.

GANG CONDENSERS

Available [illegible]: AM, AM/FM, FM, 2- and 3-gang. Miniature Condensers for Transistor Radios. Strong and reliable construction of best materials.

SPECIAL TRIMMERS

Tubular-screw adjustment, mica dielectric. Wide capacitance sweep, e.g. 2/20 pF, 3/30 pF, 3/40 pF, 3/50 pF. AIR TRIMMER 2/20 pF mounted on ceramic base.

PAPER CAPACITORS

hermetically sealed in aluminium tubes. CAPACITORS for discharge lighting applications. CAPACITORS for Motor Starting. BOTH TYPES ARE SUITABLE FOR OPERATING IN TEMPERATURES OF UP TO +90°C WITH PEAK OF +100°C.

STEATITE INSULATIONS LTD

31, GEORGE STREET, LOZELLS, BIRMINGHAM, 19

Telephone: NORthern 8357/8 *Telegraphic Address: "Steatite-Birmingham, 19"*

The Superspeed Soldering Iron

heats up from cold in 6 seconds

Designed on an entirely new principle, this lightweight, versatile iron is eminently suitable for soldering operations in the radio, television, electronic and telecommunication industries. For test bench and maintenance work it is by far the most efficient and economical soldering iron ever designed.

Length, 10"; weight, 3½ ozs.

For best results with this iron use ENTHOVEN SUPERSPEED CORED SOLDER and ALUMINIUM CORED SOLDER

- Activated by light thumb pressure on the switch ring. When pressure is released, current is automatically switched off—thus greatly reducing electricity consumption, wear on copper bit and carbon element.
- Can be used on 2.5 to 6.3 volt supply (4 volt transformer normally supplied) or from a car battery.
- More powerful than conventional 150-watt irons; equally suitable for light wiring work or heavy soldering on chassis.
- Simple to operate; ideal for precision work.
- Requires minimum maintenance—at negligible cost; shows lowest operating costs over a period.

LIST PRICES	
IRON	39/6
TRANSFORMER	35/6
All prices and trade discounts subject to revision	

ENTHOVEN SOLDERS LTD.
(Industrial Equipment Division)
Sales Office & Works:
Upper Ordnance Wharf, Rotherhithe Street, London, S.E.16. Tel.: BERmondsey 2014
Head Office:
Dominion Buildings, South Place, London, E.C.2. Tel.: MONarch 0391

M. R. SUPPLIES, LTD.,
(Established 1935)

We offer only first-class material at the most attractive prices and with prompt delivery. Satisfaction assured. Prices nett.

SMALL GEARED MOTORS. In addition to our well-known range we can now offer smaller open type S.P. units, 200/250 v. A.C., final speed either 6 or 12 r.p.m. (torque approx. 6 lbs/ins.). Size: 3in. long by 2¼in. by 1¼in. with 1in. shaft proj. Suitable for display work and many industrial purposes. Either speed, only **69/6** (despatch 2/-).

MINIATURE COOLING FANS (200/250 v. A.C.) with open type induction motor, 3in. by 2¼in. by 1¼in. and 4in. 4-bladed metal impeller. Ideal for projector lamp cooling and convector heaters, etc., **29/6** (despatch 2/-).

HIGH DUTY RECTIFIERS (S.T.C.) D.C. output 36 volts 15 amps, full-wave, **57/6** (des. 3/-). Also 240 volts 5 amps., **66/14/6** (des. 4/6).

SYNCHRONOUS ELECTRIC CLOCK MOVEMENTS. 200/250 v. 50 c/s. Fitted with spindles for hours, minutes and seconds hands. Self-starting, central hole fixing. Dia. 2½in., depth behind dial only 1in. Very latest model With dust cover, **29/6** (despatch 1/6). Sets of three hands to fit, in good style for 5/7in. dial, **2/6** set, or 8/10in. dial, **3/6** set.

SYNCHRONOUS TIMER MOTORS (Sangamo). 200/250 v. 50 c/s. Self-starting. 2in. dia. by 1½in. deep, 1 r.p.m., 1 r.p.h., and 12 r.p.h., any one **37/6** (des. 1/-). Also high torque model (G.E.C.) 6 r.p.m., **57/6** (des. 1/-). These are suitable for display turntables.

SUPPLY METERS (Kilowatt-hour). 200/250 v. 50c/s. Usual 5-index dial reading from 1/100th Unit. Loading 5 amps. L.S. (quite suitable for 10 amps). These are brand new, at zero, simple to instal, **39/6** (despatch 3/6).

OPERATION COUNTERS (mechanical). Continuous rotary action, counting up to 6,000 with 1/10th indicator. One rev. per digit, forwards and backwards counting. Size: 3¼in. by 1¼in. sq., **25/6** (despatch 1/-).

SYNCHRONOUS TIME SWITCHES. (Sangamo) for accurate pre-set switching operations on 200/250 v. 50 c/s. Providing up to 3 on-off operations per 24 hours at any chosen times, with day-omitting device (use optional). Capacity 20 amps. Compactly housed 4in. dia., 2¼in. deep. With full instructions. **25/6/6** (despatch 2/6). Also Smith's Relyon Twin-circuit model, 20-amp. switching, **27/8/-** (des. 2/6).

EXTRACTOR FANS. A very popular line. Well-made units at much lower than normal prices. 200/250 v. A.C., induction motor, silent running, no interference. With mounting frame and back grille, ready for easy installation. With 6in. impeller (10in. overall dia.), 200 C.F.M., **25/5/-**. 10in. impeller (13in. overall), 240 C.F.M., **25/12/6**. Also minor model, 6in. overall dia., 75 C.F.M., **24/12/6** (despatch any one 3/-).

COMPLETE SEWING MACHINE MOTOR OUTFITS. No better job obtainable any price. 200/250 v. A.C./D.C. Fitted latest radio/T.V. suppressors. Comprising motor with fixing bracket, foot control and switch, needle light with switch, belt, etc., and instructions for easy fixing to ANY machine. The complete outfit still **26/15/-** (despatch 3/-).

SYNCHRONOUS TIMERS (by well-known British maker—brand new). Good news for those who applied too late for first supply—a limited new delivery now available. 200/250 v. 50c/s. Providing any " on " period between 5 mins. and 8 hours, switching " off " at the end of the set period. Made for electric cookers and suitable for many other purposes—tape recorders, immersion heaters, etc. Capacity 25 amps., fitted neon indicator Housing 6in. sq. by 3¼in., **24/12/6** (despatch 3/-).

M. R. SUPPLIES, Ltd., 68 New Oxford Street, London, W.C.1
(Telephone : MUSeum 2958)

EDDYSTONE COMMUNICATION RECEIVERS



Model 840A illustrated

HIRE PURCHASE TERMS

Model No.	Cash Price	Deposit	12 Monthly Payments	24 Monthly Payments
870	£123	£6/12/-	£2/6/8	£1/5/4
840	£55	£11	£3/18/10	£2/2/2
888A	£110	£22	£7/17/8	£4/4/4
680X	£140	£28	£10/0/8	£5/7/4

Carriage paid per passenger train.

The fabulous Model 880. Probably the world's most powerful production model receiver, 21 valves, complete coverage, 500 Kcs. to 30.5 Mcs. 30 ranges. Price on application.

These sets are the choice of the discerning professional and amateur users. Descriptive literature gladly forwarded.

HP RADIO SERVICES LTD.

The Eddystone Specialists

49/51 COUNTY ROAD, LIVERPOOL, 4
Telephone: AINTREE 1445 *ESTAB. 1935*

FERRANTI

MICROWAVE FERRITE COMPONENTS FOR RADAR AND COMMUNICATIONS

Included in the range are :-

ISOLATORS

Peak Powers up to 2½ MW. at S-Band.

Peak Powers up to 1 MW. at X-Band.

3 & 4 PORT CIRCULATORS, SWITCHES AND MODULATORS

3 & 4 Port Circulators, Switches and Modulators, for S-Band and X-Band Applications.

Write for further details to :-

FERRANTI LTD · KING'S CROSS ROAD · DUNDEE · Telephone: DUNDEE 87141

LINEAR

For HIGH SENSITIVITY!
HIGHEST FIDELITY!
MAXIMUM RELIABILITY!
REASONABLE COST! Also Available

MODEL L10 HIGH FIDELITY 10 WATT AMPLIFIER
WITH SEPARATE PRE-AMPLIFIER

Supplied complete only (i.e Main Amplifier and Pre-amp) **15** Retail Price GNS.

Size of main amplifier 9in. x 7in. x 5in., Pre-amp. 11in. x 4¾in. x 2¾in. Front Plate 12in. x 3¼in. Stoved Gold hammered finished chassis. Front Plate Polychromatic Gold. Weight of main amplifier 10lb. Pre-amp. 3lb. For 50/60 c.p.s. A.C. mains 200–230–250 v. or to order for export.
The Following Outstanding Test Figures include Pre-amplifier.

Sensitivity (for 10 watts)
L.P. 25 m.v.
78 r.p.m. 20 m.v.
Radio, 35 m.v.
Microphone, 2.5 m.v.

Input Impedance
All inputs 500k. Plus 10pfd.

Frequency Response
±2 d.b. 30—25,000 c.p.s.

Power Consumption
90 watts.

Maximum Power Output
In excess of 12 watts.

Negative Feedback
Total 32 d.b.

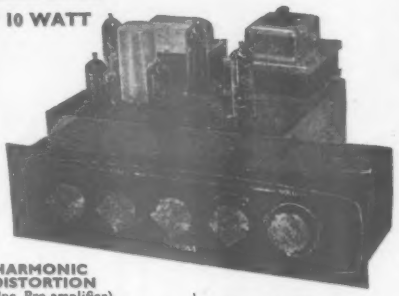

HARMONIC DISTORTION
(Inc. Pre-amplifier)
0.09% measured at 10 watts.
Damping Factor 35
Bass Control
+9 d.b. to —9 d.b. at 50 c.p.s.
Treble Control
+9 d.b. to —9 d.b. at 12,000 c.p.s.
Hum Level
—70 d.b.
Filter
—7 d.b. at 9 Kc/s.
—10 d.b. at 5 Kc/s.

MULLARD VALVES:
EF86 (1); ECC83(2); EL84 (2); EZ81(1).

OUTPUT MATCHINGS
For 3 ohm and 15 ohm L/Speakers from high grade sectionally wound output transformer.

RESERVE POWER SUPPLY (for Radio Tuner) 300 v. 30 m.a. smoothed and 6.3 v. 1.5 a. at 4-pin socket.

The L45. A Compact High Quality 4–5 watt amplifier.
Size approx. 7-5-5¾in. high. Sensitivity is 28 millivolts so that the input socket can be used for either microphone or gram., tape, radio tuner, etc. B.V.A. valves used are: ECC83, EL84, EZ80. Controls are: Vol., Treble and Bass with mains switch. The Tone controls provide full compensation for long playing records. Output matching for 3 ohm loudspeaker. Retail price £5/19/6.
THE LT45 TAPE DECK AMPLIFIER. A complete unit (power pack and oscillator incorporated) ready for connection to A.C. mains. 3 ohm loudspeaker and practically any make of deck. Negative feedback equalization adjustment by multi-position switch for 3¾, 7½ and 15in. per sec. Retail price 12 gns.
DIATONIC 10-14 WATT. High Fidelity amplifier with integral pre-amplifier. Retail 12 gns.
CONCHORD 30 WATT. Hi-Fi amplifier with two separately controlled inputs. Retail 16 gns.
L50 50 WATT AMPLIFIER. Size approx. 13 x 9 x 7in. Sensitivity 25 m.v. Outputs for 3 and 15 ohm speakers. Retail price 19 gns.
L3/3 STEREOPHONIC AMPLIFIER. Sensitivity 150 m.v. Output 3 watts on each channel. Retail 7 gns.

TRADE AND EXPORT ENQUIRIES TO:
LINEAR PRODUCTS LTD. ELECTRON WORKS, ARMLEY, LEEDS. Tel.: Leeds 63-0126 (3 lines)

Quartz Crystals of any shape and size cut and ground precisely to specification and coated, if required, with Gold, Silver or Aluminium, etc.

BROOKES CRYSTALS LTD
Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
LASSELL STREET, GREENWICH, S.E.10
Phone: Greenwich 1828
Grams: Xtals, London, S.E.10 *Cables:* Xtals, London

All good 'labs' use
Radiospares
quality components
for design
development and
prototype work

RS

Service Engineers!

Remember— Radiospares components are delivered absolutely "by return"

That is the difference... between 2dB and 18dB of treble boost, according to these bright engineers at the G.E.C. Semiconductor Applications Laboratory. Finding new applications for semiconductors, testing the number of new devices constantly being added to the already extensive G.E.C. range, these scientists are part of a group breaking new ground in electronics. The results of their work are available in the G.E.C. Semiconductor Data Service, which keeps subscribers posted with technical information and application reports on G.E.C. semiconductor devices. Ask for an application form.

G.E.C. SEMICONDUCTORS

Write to: THE GENERAL ELECTRIC CO LTD SEMICONDUCTOR DIVISION SCHOOL STREET HAZEL GROVE STOCKPORT CHESHIRE

A GREAT EGEN ADVANCE

...SINGLE COMPONENT AERIAL ISOLATOR

EGEN have made possible aerial isolation in one compact, robust component! Look at these features:

- Minimum space occupied inside chassis
- Easily installed
- Complete co-axiality
- Complete effective screening
- Minimum effect on matching of Aerial feeder to receiver
- Insertion loss less than 0.3dB at 50 Mc/s.
- Multi-path resistors giving greater reliability
- All functional elements enclosed and protected against damage
- No soldered joints
- Accepts standard 0.202 in. O.D. co-axial cable
- Component parts are not subjected to heat from soldering iron



EGEN Type 364 Aerial Isolator

The illustration shows the component actual size.

Write now for full details to:

EGEN ELECTRIC LTD

CHARFLEET INDUSTRIAL ESTATE • CANVEY ISLAND • ESSEX

TRANSFORMERS FOR

New Industrial Projects

that work to specification

First Time

provide a sound and satisfactory economy.

They can be obtained from: **R. F. GILSON LTD.**

who provide a first class service to manufacturers in prototype design and small or medium scale production of transformers and chokes for

Communications
Electronics
Instrumentation
Automation
Research
Etc. Etc.



If Transformers are your problem

Let **R. F. GILSON LTD.** *Solve it*

11a St. Georges Road, Wimbledon, S.W.19. WIM 5695

PATENT No. 829567

CECO Vari-stat

THERMOSTATIC SOLDERING IRON

INSTRUMENT SIZE

The thermostatic soldering iron heats up very quickly (1¼ mins.) but never overheats or corrodes, and weighs only 4½ oz. The thermostat is easily adjusted to suit the grade of solder and keeps the temperature to within 15°C. It incorporates a micro-switch giving snap action on-off with minimum electrical interference. All parts of the instrument are interchangeable.

LIST PRICE 79/6

Manufactured by:

CARDROSS ENGINEERING CO. LTD.

WOODYARD ROAD DUMBARTON

More 'Melinex' in 1961

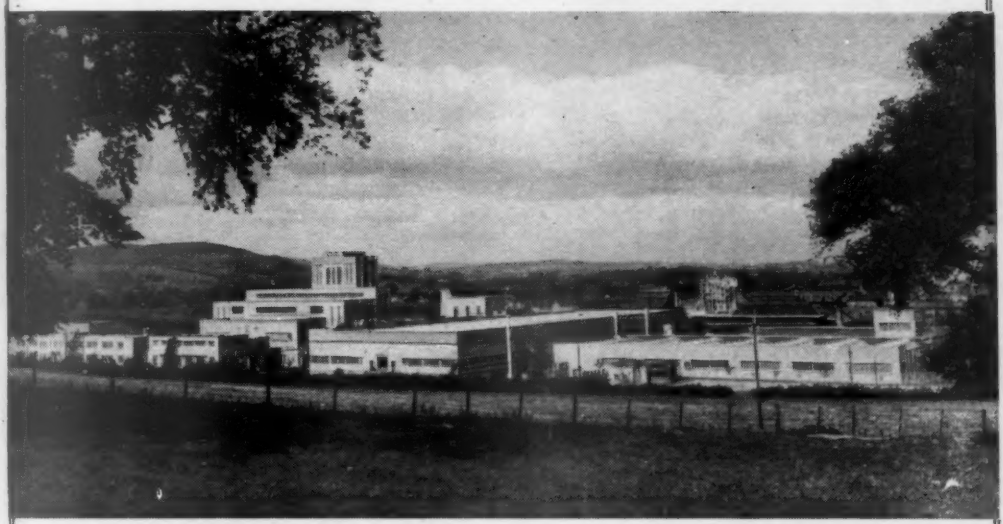

I.C.I. build new plant to produce 2,000 tons of 'Melinex' film per year

IN JANUARY 1961, a new 'Melinex' polyester film plant will start production at Dumfries with a rated capacity of 2,000 tons/year. I.C.I., who are the sole manufacturers of polyester film in this country, have been selling 'Melinex' for some years. The demand has increased rapidly and I.C.I. have been allowing imports of American and Continental film to supplement their limited production. The new plant will remove the necessity for such imports.

More and more firms are appreciating the outstanding properties of 'Melinex' film. Its unusual clarity and strength (both mechanical and electrical) combined with its great dimensional stability and resistance to heat and chemical action, are improving a very wide range of products throughout industry.

Where 'Melinex' film is now being used:

The Electrical Industry—in coils, capacitors, cables, recording tapes and loudspeakers.
Drawing Offices—as a flexible, durable and dimensionally stable drafting film.
Display—in metallised form for tinsel and as coloured tapes and panelling.
The Book Trade—for protecting covers and as a base for hot stamping foils.
Footwear & Leather goods—in metallised form for shoes and fashion accessories.
The Food Industry—for improving the sales appeal of goods and for 'boilable' packs.

The range of uses for this versatile film will widen considerably in 1961. *If you would like further information or wish to discuss a possible application for 'Melinex' film, please write to I.C.I. Their Technical Service staff will be pleased to give advice and technical assistance.*

'Melinex'

'Melinex' is the registered trade mark for the polyethylene terephthalate film manufactured by I.C.I.

ICI

IMPERIAL CHEMICAL INDUSTRIES LIMITED · LONDON · S.W.1

PHE1

WEYRAD P.50 TRANSISTOR COILS AND I.F. TRANSFORMERS

FOR 2-WAVE PORTABLE WITH PRINTED CIRCUIT AND ROD AERIAL

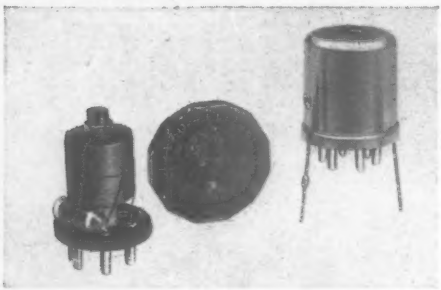

P50/IAC M.W. OSCILLATOR COILS. For 176pF TUNING CONDENSER ..... PRICE **5'4d.**

P50/2CC 1st and 2nd I.F. TRANSFORMER. 470 Kc/s. OPERATION. "Q" = 150..... PRICE **5'7d.** (2 REQUIRED)

P50/3CC 3rd I.F. TRANSFORMER. 470 Kc/s OPERATION. "Q" = 170 ..... PRICE **6'0d.**

RA2W L.W. and M.W. ROD AERIAL 6in. long, flying-lead connections. For 208pF TUNING CONDENSER ..... PRICE **12'6d.**

LFTD2 DRIVER TRANSFORMER. Split Secondary Type, semi-shrouded. With 6 connecting tags ..... PRICE **9'6d.**

PCA1 PRINTED CIRCUIT PANEL, 2¾ x 8¼in. ready drilled with component positions and references printed on rear ..... PRICE **9'6d.**

BOOKLET OF DETAILED ASSEMBLY INSTRUCTIONS AND CIRCUIT DIAGRAMS FOR 6-TRANSISTOR LONG AND MEDIUM WAVE SUPERHET ..... PRICE **2'0d.**

ALL IN BULK PRODUCTION—TRADE ENQUIRIES INVITED

WEYMOUTH RADIO MFG. CO. LTD., CRESCENT STREET WEYMOUTH, DORSET

A wide range of LAMPHOLDERS for use in circuits up to 380v using NEON and FLUORESCENT neon lamps or low voltage filament lamps are available.

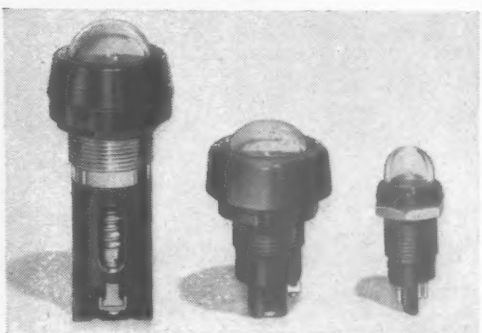

★ *Full details and catalogues from :*

NEOFLEX LTD.

123a NEASDEN LANE, LONDON, N.W.10

Tel: GLADSTONE 2718 & 4075

CUT COSTS! END DELAYS!

With STEVENAGE RELAYS

Relay Kit

7 COILS FROM 500Ω TO 20 KΩ
8 LIGHT plus 8 HEAVY DUTY SPRING SETS with a full set of accessories to enable you to quickly bread-board your relay circuitry.
Back up your prototype work with fast delivery for both small and large production runs with the manufacturing facilities of Stevenage Relays.

STEVENAGE RELAYS LTD.

D.G.I. TYPE APPROVAL NOW GRANTED FOR OUR RANGE OF RELAYS
Certificate Nos. HIGH VOLTAGE 1178, 1179, LOW VOLTAGE 1287.

A MEMBER OF THE Sanders GROUP OF COMPANIES

GUNNELS WOOD ROAD · STEVENAGE · HERTS.

Telephone: Stevenage 981. Telex: 82159 Sanders, Stev.

Ask for further details of our full range of Relays and Relay Kits

STABILIZED SINUSOIDAL VOLTAGE

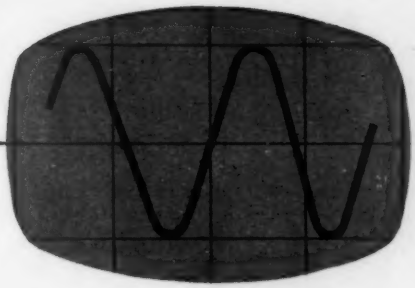

by Advance

THE CVH RANGE

Advance constant voltage transformers are available in the CVH range with low harmonic distortion in the output waveform, ideal for use with precision equipment sensitive to power frequency harmonics, and also with all equipment requiring a constant voltage sinusoidal input.

In most applications the harmonic distortion present in the output waveform will not exceed 3%. Under the most unfavourable conditions this figure will not rise substantially above 5%. When used with a rectifier to provide a d.c. supply, the characteristics of the system are identical to the normal mains source and particularly close regulation of the output is obtained.

Type	I/P V Range	O/PV r.m.s.	Watts	p.f.	Net Price in U.K.
CVH60A	190–260 50 ~	240	60	1.00	£10 10
CVH125A	190–260 50 ~	240	125	1.00	£17 0
CVH420A	190–260 50 ~	240	420	1.00	£37 0
CVH750A	190–260 50 ~	240	750	1.00	£68 0
CVH1500A	190–260 50 ~	240	1,500	1.00	£99 0
CVH3000A	190–260 50 ~	240	3,000	1.00	£185 0
CVH6000A	190–260 50 ~	240	6,000	1.00	£355 0

Full details in Folder M1 available on request

VOLSTAT

- CONTINUOUS AND AUTOMATIC STABILIZATION
- RAPID RESPONSE TIME
- CURRENT LIMITING CHARACTERISTIC
- COMPACT DESIGN
- NO MOVING PARTS
- NO ROUTINE MAINTENANCE

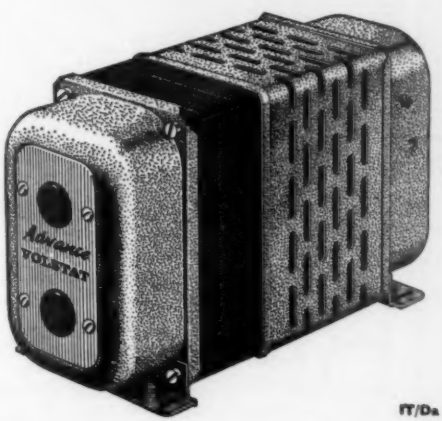

Advance COMPONENTS LIMITED

MAINS STABILIZATION DIVISION

ROEBUCK ROAD • HAINAULT • ILFORD • ESSEX • TELEPHONE : HAINAULT 4466

FT/Da

LEVELL TRANSISTOR R.C. OSCILLATORS

- 1.5 c/s to 150 kc/s
  Continuous coverage in 5 ranges
- LOW DISTORTION
  Less than 0.1% at 1 kc/s
- OUTPUT 2.5 V. INTO 600 OHMS
  Continuous control down to 250 μV
- CONSTANT AMPLITUDE
  Within 1% over whole range
- NO SLOW WARM-UP DRIFT
  Stable after initial 30 seconds
- NO MAINS HUM
  Supply battery life of 400 hours

Type TG150 (without meter) £27 Type TG150M (illustrated) £36

LEVELL ELECTRONICS LTD.
10-12, St. ALBANS RD., BARNET, HERTS.
Telephone Barnet 5028

ACOS HI-LIGHT PICK-UP



Designed to play records at downward pressures within the elastic limit of the disc material. No permanent deformation of the record takes place under these conditions and record wear is not measurable.

Range: 20-20,000 c/s. ± 3 dbs. Tracking down to 1.5 grammes. Complete with Mono head. 17 gns. Stereo head 1 gn. extra.



GOODMANS AL/120

A complete 15 watt three-way high fidelity loudspeaker system, comprising a precision built 12in. unit co-axially mounted mid-range radiator and pressure driven HF unit, providing performance from 35-20,000 c/s. Power handling capacity 15 watts. Size: 24in. wide, 11½in. deep, 14½in. high.

Price 29/10/-.

LEAK "STEREO 20" POWER AMPLIFIER

11 WATTS PER CHANNEL £30.9.0

LEAK "POINT ONE" STEREO PRE-AMPLIFIER

A comprehensive Pre-amp. for Stereo Control. £22.
(Also 'Varislope' Stereo at £25).

FULLY ILLUSTRATED HI-FI CATALOGUE 6d. POST FREE

BERRY'S RADIO
25 HIGH HOLBORN, LONDON, W.C.1 HOL. 6231/2

HARD GOLD PLATING

24 Carat Fine Gold
Sel-Rex Bright Gold
Johnson Matthey Gold
Autronex Acid Gold
Antimony Doped Gold
Karatclad Acid Gold
Technic Gold

PRECIOUS METAL DEPOSITORS LTD.
HEARSALL LANE, COVENTRY Tel: Cov 73159

Time Delay

By virtue of their unique, patented, stainless-steel movement, G-V Thermal Relays are unsurpassed for accuracy, reliability and environmental characteristics. They are small and light, entirely inorganic, bi-metal free, and precision engineered to the highest standards. Their behaviour is completely predictable under all conditions.

Applications	Time delay, voltage and current sensing, wattage regulation, flashers, pulse generators
Ranges	Hermetically-sealed *and* adjustable, sealed and factory set, unsealed with dust cover
Mechanical	Plug-in and solder-in, B7G and octal, printed circuit, sub-miniature; weight ¼ to 1½ ozs.
Time Delays	.2 to 500 seconds
Heaters	.5 to 230 V. D.C. or A.C., 2 to 6 W.
Repeatability	Precision types to ±1%
Differential	Sensing relays to ±1%
Temperature	Fully compensated −65° to +125°C
Exposure	Sealed types meet all applicable specifications. Unaffected by position and altitude
Vibration	Types suitable for up to 20g 2,000 c/s
Instant Reset	Special models can repeat delay immediately after completion of previous cycle
PRICES	**FROM 62/6 EACH**

In applications ranging from missiles to domestic appliances. G-V Relays serve the electronics industry, and are the first choice—whether it is quality or economy that counts. Already, by many manufacturers, they are specified as standard.

COVENTRY CONTROLS LTD.
GODIVA HOUSE · ALLESLEY OLD ROAD
COVENTRY

Telephone: COVENTRY 72055 **A.I.D. and A.R.B. APPROVED**

G-V THERMAL RELAYS

If you are searching the horizon for something out of the ordinary in the way of transistors, it may not be as far away as you imagine. There's a whole new galaxy of Ediswan Mazda Industrial transistors, and the number is constantly increasing. We'll be pleased to send you detailed specifications of those that meet the requirements of the job you have in mind if you will send us details on your letterheading.

This could be it!

One of the important additions to our range is the XB121 germanium pnp alloy transistor with a **105 volt collector breakdown and punch through voltage rating** for high voltage low power switching and control applications.

EDISWAN
MAZDA
SEMICONDUCTORS

Associated Electrical Industries Limited
Radio & Electronic Components Division
Semiconductor Department, 155 Charing Cross Road, London W.C.2
Tel: GERrard 9797. Telegrams: Sieswan Wescent London
CRC 15/75

Wireless World

ELECTRONICS, RADIO, TELEVISION

JANUARY 1961

Managing Editor:
HUGH S. POCOCK, M.I.E.E.

Editor:
F. L. DEVEREUX, B.Sc.

Assistant Editor:
H. W. BARNARD

1	Editorial Comment	
2	Beam Indexing Tubes—1	*By I. Macwhirter*
7	Silicon Carbide Transistor	*By M. Lorant*
9	Physical Society: List of Exhibitors	
10	Scientific Radio Conference	*By R. L. Smith-Rose*
12	World of Wireless	
14	Personalities	
16	New from Industry	
17	Transistor Inverter	*By F. Butler*
20	Panel Nameplates	*By H. Dagnall*
21	The Bootstrap Follower—I	*By G. W. Short*
26	Radio Hobbies Exhibition	
29	Ring Aerials	*By H. Page*
31	Transistor Noise	*By "Cathode Ray"*
34	Elements of Electronic Circuits—21	*By J. M. Peters*
35	Letters to the Editor	
37	Manufacturers' Products	
39	Iron-Cored Coupling Transformers	*By D. Saull*
44	Short-wave Conditions	
45	Technical Notebook	
45	January Meetings	
46	Conferences and Exhibitions	
48	Random Radiations	*By "Diallist"*
50	Unbiased	*By "Free Grid"*

VOLUME 67 No 1.

PRICE: TWO SHILLINGS

FIFTIETH YEAR
OF PUBLICATION

Offices: Dorset House, Stamford Street, London, S.E.1

Please address to Editor, Advertisement Manager, or Publisher, as appropriate

©Iliffe Electrical Publications Ltd. 1961. Permission in writing from the Editor must first be obtained before letterpress or illustrations are reproduced from this journal. Brief abstracts or comments are allowed provided acknowledgment to the journal is given.

PUBLISHED MONTHLY (4th Monday of preceding month) by ILIFFE ELECTRICAL PUBLICATIONS LTD., Dorset House, Stamford Street, London, S.E.1. *Telephone:* Waterloo 3333 (65 lines). *Telegrams:* "Ethaworld, London, S.E.1." *Annual Subscriptions. Home and Overseas,* £1 15s. 0d. *Canada and U.S.A.,* $5.00. Second-class mail privileges authorized at New York, N.Y. BRANCH OFFICES: *BIRMINGHAM:* King Edward House, New Street, 2. *Telephone:* Midland 7191. *COVENTRY:* 8-10, Corporation Street. *Telephone:* Coventry 25210. *GLASGOW:* 62, Buchanan Street, C.1. *Telephone:* Central 1265-6. *MANCHESTER:* 260, Deansgate, 3. *Telephone:* Blackfriars 4412. NEW YORK OFFICE: *U.S.A.:* 111, Broadway, 6. *Telephone:* Digby 9-1197.

over 30 new circuits are in the **Mullard** REFERENCE MANUAL OF TRANSISTOR CIRCUITS

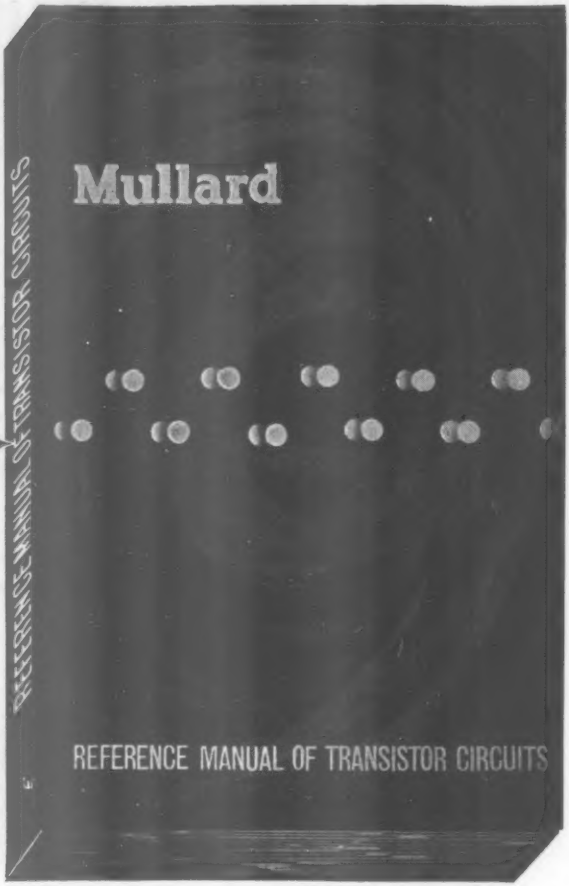

This new manual of transistor circuitry has been prepared by Mullard engineers, as an up-to-date and readable volume which will be of use and interest to technicians, service engineers, junior designers and electronics students.

It has a page size of 8½" x 5½" and describes more than 60 circuits—over 30 are made generally available for the first time—including both domestic and industrial applications.

308 PAGES · 241 DIAGRAMS · U.K. PRICE 12s. 6d.

PUBLISHED BY MULLARD LTD.

Get your copy of the Mullard "Reference Manual of Transistor Circuits" today from your radio dealer, or order direct from Mullard Ltd. (postage and packing 1s. 0d. extra in U.K.).

MULLARD LIMITED · MULLARD HOUSE · TORRINGTON PLACE · LONDON · W.C.1.

Overseas readers should enquire of their local Mullard Agents.

MVM 10

Wireless World

VOL 67 NO 1 JANUARY 1961

COLOUR BRINKMANSHIP

FOR a long time now colour television in this country has been in the doldrums. Those who want to get under way and who expected a wind from the Television Advisory Committee's Report were disappointed, but they have recently received what in nautical language might be termed a puff from an unexpected quarter.

The T.A.C. Report (May, 1960) said, amongst other things: "... we are of the opinion that present technical and economic limitations make it undesirable to introduce a colour television system in the near future," and that "any decision with regard to the introduction of colour must follow a decision on line standards."

The Director-General of the B.B.C. in a speech to the Radio and Television Retailers' Association in London (October 25th, 1960) said: "We in the B.B.C. are ready and very eager to proceed with a small compatible colour service within the framework of our existing programme in Band I on 405-lines, without waiting for a decision on whether there is to be a future move to 625-lines in Bands IV and V ... to wait for colour on 625-lines means that there will be no colour for a national audience for something like another ten years—and that, after the development work the B.B.C. has done during the past six years, would be most regrettable."

All very confusing and reminiscent of the ancient battle in which "those behind cried 'Forward,' and those before cried 'Back'." At least that is how it must appear to the layman who is confronted with such contradictory statements. But he should understand the feelings of the D.-G. His engineers have produced for him a beautiful toy. No one who has seen recent B.B.C. colour transmissions on a good colour receiver in any of the industry's research laboratories will deny that they are superb. Naturally he wishes to share his pleasure with others; the more the merrier, and the sooner the better. It may seem a small favour to ask of the P.M.G. that he should give permission to take the out-of-hours experimental transmissions which the B.B.C. has been putting out regularly for years, double their duration and include them in regular broadcasting hours: a start would have been made. A start of what? Not of colour television; that was made by the B.B.C. nearly six years ago. The start of a service, and we should be over the brink.

Once a service is started anything may happen. The public may cold-shoulder it on the score of cost, or a few Joneses may set the pace, and industry may be inundated with orders from their neighbours before it is in a position to meet the demand. If it decides to supply the die will have been cast and the pattern will be difficult to change.

Six years ago the Americans took the plunge and committed themselves to the N.T.S.C. system which, with the shadow-mask three-gun tube and with competent handling, is capable of giving superb results, but which failed to fulfil in the field the high promise of its sponsors. As a result of the American experience significant improvements have been made in receiver stability and reliability, but the three-gun shadow-mask picture tube, to the characteristics of which the N.T.S.C. system is tailored, is costly and likely to remain so. More important, the formulation of colour information in the signal has been compromised in its favour to produce an improved, though still not technically perfect, overall system performance. In so doing, difficulties have been placed in the way of the development of alternative and cheaper display tubes. These difficulties are not insuperable, as the article on a single-gun beam-indexing tube, which starts in this issue, will show, but a strong case can be made[1, 2] for complete independence of brightness and colour information to give more freedom for possible future developments. In other respects the N.T.S.C. standards were a masterpiece of ingenuity and the basic concepts leading to compatibility with ordinary black-and-white television will no doubt be retained in any future standardization.

At the moment the shadow-mask three-gun tube undoubtedly leads the field, but it is being strongly challenged by single-gun tubes[3] of various types which are cheaper to produce, and if proved and adopted could help to remove the present obstacles of high first cost and maintenance. In the running are electro-luminescent and eidophor (oil film light gate) methods, and there may be as yet unknown outsiders working their way up towards the leaders.

On the present showing the B.B.C. has undoubtedly backed a winner in the shadow-mask tube, which even removes the lininess from the 405 standard! But it has also made sure of success by giving it the N.T.S.C. track to run on; other promising runners have at times found the going a little hard. The B.B.C.'s proper function is to provide and maintain the track, not the horses, and the choice of going will be the privilege and the duty of the Postmaster General after hearing the advice of the Pilkington Committee. They have called for evidence and it is now up to industry to bring out all those promising ideas on which they have been working for so long, so that their requirements may be taken into account in arriving at colour standards which are fair to all, and will endure.

[1] "N.T.S.C. Colour Information," by E. L. C. White. *Wireless World*, February, 1957.
[2] "An Alternative Colour TV System," by E. J. Gargini, *Wireless World*, August, 1957.
[3] "Single-Gun v. Three-gun Tubes: Their Influence on Colour Receiver Design," by R. N. Jackson, *Journal of the Television Society*, April-June, 1960.

Beam Indexing Tubes

1.–AN ALTERNATIVE TO THE SHADOW-MASK PRINCIPLE FOR COLOUR TELEVISION DISPLAYS

By IAN MACWHIRTER,* A.M.I.E.E.

The deficiencies of the shadow-mask colour display tube are outlined and proposals are made for the design of a tube which is completely free from these deficiencies. It is shown that the N.T.S.C. type of colour television signal is not suitable for direct application to the new tube and means are described for transforming the N.T.S.C. signal into a suitable form. The problems of synchronizing the colour signal with the instantaneous beam position are discussed and various solutions are suggested.

Comments are made on the advisability of modifying the formulation of the N.T.S.C. type of signal into a form better suited to the new display.

THE Television Advisory Committee has made no specific recommendations to the Postmaster General in connection with colour television standards.[1] Potential manufacturers of colour display tubes now have an opportunity for investigation of the usefulness of display tubes other than the shadow-mask tube. It is clear that had the early introduction of a public colour television service been recommended in the United Kingdom, the manufacturers of colour receivers would almost certainly have had to use a three-gun shadow-mask cathode ray tube. This tube, pioneered by R.C.A., has now been engineered to a standard with which all new developments in single unit colour display tubes will be compared. There are, however, operational shortcomings which are well known and can be briefly stated as follows:—

1. Only a small percentage of beam current reaches the phosphor because of shadow-mask trapping. Result: the maximum useful high-light brightness is limited to some 20ft. lamberts.

2. Because the phosphors have unequal efficiencies and because cathode ray tube guns have power-law characteristics, it is not easy to match the three guns in operating conditions. Result: the grey scale requires critical adjustment.

3(a). Each of the three beams must be individually aligned to excite the appropriate phosphor dots exclusively and completely. Result: incorrect purity adjustment will cause a colour shade in the picture both in brightness and in hue.

3(b). The three beams must converge on to one trio of phosphor dots. Failure of this requirement will cause colour fringing around the boundaries of picture components quite independently of the three differential driving voltages applied to the tube.

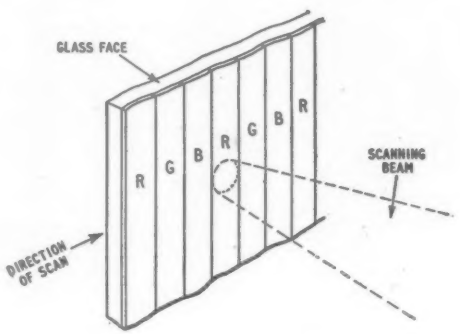

Fig. 1. Enlarged section of screen showing vertical phosphor strips.

4. Presently available tubes have a deflection angle limited to some 70°. Result: the tube is significantly more bulky than a 110° black and white tube of similar screen area.

A fundamental drawback is that the three-gun shadow-mask tube is difficult and expensive to make. Moreover, the tube must be used with a variety of magnets for convergence, beam-positioning and field purity, all of which help to increase receiver costs.

Proposed Solution. All four operational drawbacks may be obviated with the use of a single-gun tube whose beam can scan sequentially a series of tricolour phosphor strips; such strips may be arranged either horizontally or vertically, but this discussion relates primarily to tubes with vertical phosphor strips.[2,3] A steady beam current will

*Associated Electrical Industries, Ltd.

produce equal current excitation of the three phosphor strips during scanning and it is a fundamental requirement of this type of tube that the relative efficiencies of the phosphors should be balanced, so that white light is produced for a steady beam current. Small errors in the white point may conveniently be adjusted by means of external colour-correction filters.

The inevitable decrease in brightness caused by the balancing of the phosphor efficiencies, mainly in the green, can be alleviated if an elliptical spot is used whose minor axis is no greater than the width of a phosphor strip, and whose major axis is such that the scanning lines almost touch, i.e., satisfy the conditions for a "flat field." The brightness of a tube with such a gun can be as good as a modern black and white tube.

Fig. 1 is a drawing of a cutaway portion of the screen of such a tube, but the phosphor strips need not necessarily be contiguous as shown. It is of some importance that should the beam "spread" with increasing video drive, the intended excitation of, say, one primary should not be accompanied by unwanted partial excitation of the other two primaries.

Ideally, there should be a sufficient number of colour phosphor triplets such that the highest frequency component of the video luminance signal would be unable to excite less than one complete triplet of colour phosphors; it is axiomatic, then, that the average eye would be unable to resolve the individual colour strips at a normal viewing distance. In other words, a normal video signal applied to the tube would appear as a black and white picture, free from purity, convergence and electron-gun differential contrast characteristics. In practice, however, the use of a coarse strip structure appears to simplify some of the circuitry to be described later, and the number of triplets is chosen by a compromise.

In order to show a colour picture, it is necessary that the beam current should be excited with voltages proportional to the colour signal when it is passing over the appropriate colour phosphor. This implies that an indicating or index mechanism is necessary to seek out the instantaneous horizontal position of the beam and to switch on, or "gate," the appropriate colour signal: red, green or blue.

At this stage it is useful to make a comparison between the relative complexities of the following displays, a black and white, a single-gun strip phosphor and a three-gun shadow-mask. Fig. 2 illustrates this comparison. It should be appreciated that the fundamental difference between the three-gun shadow-mask display and the single-gun beam indexing display is that the former requires a three-stimuli, simultaneous-colour signal, whereas the latter requires a three-stimuli, dot-sequential signal.

The use of a beam position indexing mechanism in a colour receiver creates great problems and some time must now be spent in understanding them.

As an introduction to this, it would be as well to see how a typical band shared colour television signal is matched by the requirements of the three-gun shadow-mask display and by a "beam position indexing" display.

A typical colour signal, e.g., the N.T.S.C. signal, consists of two parts: (i) a wide-band black and white, or luminance, signal E_Y' and (ii) two bandwidth-limited components proportional to monochromatic colour minus luminance, $a(E_R^{1/\gamma} - E_Y')$, $b(E_B^{1/\gamma} - E_Y')$ which doubly modulate a carrier in balanced

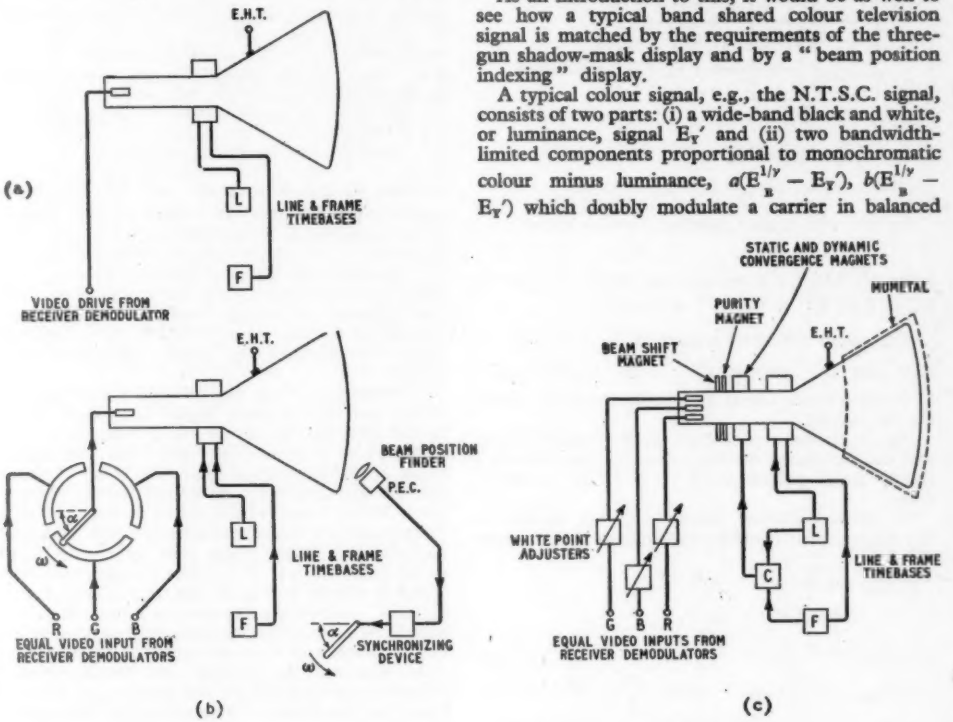

Fig. 2. Basic elements of (a) a black and white display, (b) a single-gun beam sensing display, (c) a shadow-mask display.

modulators, and these constitute the chrominance signal.[4] (The carrier of single frequency is divided into two orthogonal components, i.e., a quarter of a cycle apart, before the modulators). The composition of the luminance signal E_Y' is of some importance; starting with three suitable reproducing primaries, the amounts of red, green and blue are proportioned according to their relative contributions to luminance, which give rise to the visual sensation of brightness. This is because the colour difference channels are scaled so that they contribute nothing to brightness; this brightness reproduction is left entirely to the luminance signal. For N.T.S.C. primaries and for a normalizing white of 6,500°K,

$$E_Y' = 0.30\,E_R^{1/\gamma} + 0.59E_G^{1/\gamma} + 0.11E_B^{1/\gamma}.$$

The colour difference signals $(E_R^{1/\gamma} - E_Y')$, $(E_B^{1/\gamma} - E_Y')$ and the derived $(E_G^{1/\gamma} - E_Y')$ when added to the luminance signal E_Y', produce colour signals for the display.[4]

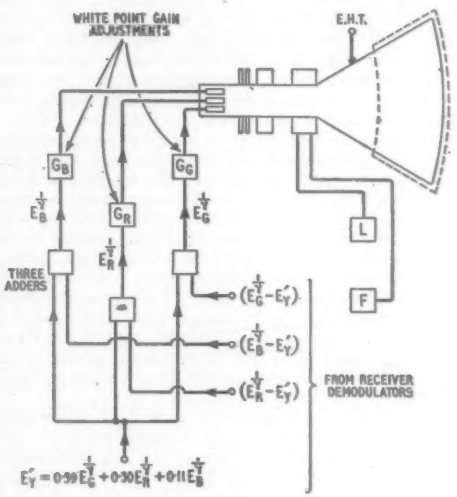

Fig. 3. In a typical display, $G_G = G_B = 0.7G_R$, but may vary with different phosphor conversion efficiencies.

Fig. 3 shows a three-gun shadow-mask display and the associated driving voltages derived from a colour signal proportioned to N.T.S.C. specifications.

If colour difference signals only are applied to the display, their relative contributions to luminance will be:

$$Y_R = 0.30\,(E_R^{1/\gamma} - E_Y')$$
$$Y_G = 0.59\,(E_G^{1/\gamma} - E_Y')$$
$$Y_B = 0.11\,(E_B^{1/\gamma} - E_Y')$$
$$\therefore Y_{total} = \sum Y_{RGB} = 0.30\,E_R^{1/\gamma} + 0.59\,E_G^{1/\gamma} + 0.11\,E_B^{1/\gamma} - 1.0\,E_Y' = 0$$

i.e., the colour difference signals themselves do not contribute to luminance changes (in a linear system). Therefore, the relative gains in the chrominance channels of the receiver may be proportioned so that an interfering signal present on all three colour difference signals will produce changes only in chromaticity of the display, i.e., constant luminance operation can be achieved. These necessary changes in relative gains are recognized in the formulation of the N.T.S.C. signal.

From the foregoing it will be appreciated that the three-gun shadow-mask tube is well matched to the N.T.S.C. colour signal.

Fig. 4 shows a single-gun beam indexing display and its associated driving voltages from which it will be seen that the N.T.S.C. simultaneous colour signal is transformed into a dot sequential signal by means of gate circuits. Again the display exhibits constant luminance but the three gate circuits must either be very linear in order to preserve the inherent perfect grey scale of the single gun tube or they must gate colour difference signals.[5,6]

The composition of the luminance signal which results in the smallest voltage swings in the colour difference gates, has equal weightings by red, green and blue.

Thus $E_L' = \frac{1}{3}E_R^{1/\gamma} + \frac{1}{3}E_G^{1/\gamma} + \frac{1}{3}E_B^{1/\gamma}$.

From this it is possible to predict the maximum excursion of the colour difference signals, and how these are matched to the permissible amplitude swing of the video signals in the gates for linear operation. If a saturated primary colour is transmitted, e.g., blue, then $E_L' = \frac{1}{3}$, since $E_R^{1/\gamma} = E_G^{1/\gamma} = 0$ and $E_B^{1/\gamma} = 1$, $\therefore (E_B^{1/\gamma} - E_L') = 1 - \frac{1}{3} = 0.67$. Now let the complementary colour yellow, be transmitted then

$$E_L' = \tfrac{2}{3}, \text{ since } E_R^{1/\gamma} = E_G^{1/\gamma} = 1 \text{ and } E_B^{1/\gamma} = 0$$
$$\therefore (E_B^{1/\gamma} - E_L') = 0 - \tfrac{2}{3} = -0.67.$$

Thus the peak excursion of the $(E_B^{1/\gamma} - E_L')$ signal is from $+0.67$ to $-0.67 = 1.33$. Because of the composition of the luminance signal, the peak excursion of all three colour difference signals is 33% greater than for single primary signals. This means that the gates must be designed to accept this increase in voltage swing. However, small differential contrast errors will not be objectionable since, for neutrals, the colour difference signals vanish.

A better use of the display tube would be one in which the chrominance signal is applied directly to the tube and so allows the sequential scanning of the colour phosphors to "gate" the chrominance signal at the appropriate time intervals.[7] Assuming that the line scanning is linear and that the phosphor strips are of equal width, the separation of vector components of the chrominance signal should be equi-angular rather than that of the N.T.S.C. signal formulations. A suitable chrominance vector signal is shown in Fig. 5, and superimposed is the N.T.S.C. chrominance signal which has been merely redrawn with three vector components.

Two points arise from this new chrominance vector.

1. The angular rotation, i.e., colour switching frequency, is decided by the number of phosphor strips on the screen. This frequency should be a little higher than the sub-carrier (if the visibility of the strip structure is not to be objectionable at a

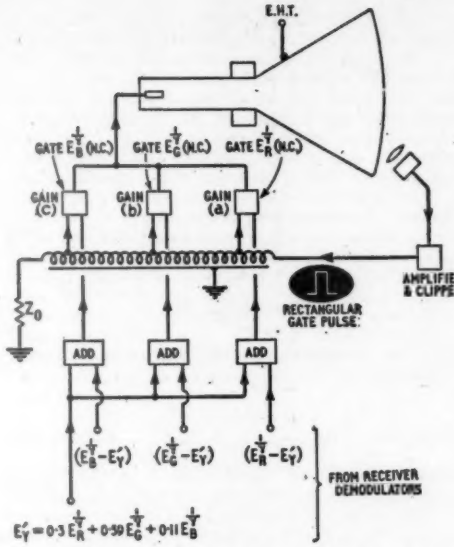

Fig. 4. Essential elements of a single-gun beam indexing display.

normal viewing distance), and it will vary if the line sweep is non-linear, or if the amplitude of the line sweep changes. Means must therefore be provided for synchronizing the new chrominance vector to the colour switching rate.

2. The vectors are shown as having equal amplitudes and the reason for this may not be immediately obvious. It will be recalled that in the design of a three-gun shadow-mask receiver, the gains in the colour channels (either in the three demodulators or in subsequent amplifiers) are such as to achieve constant luminance and the relative amplitudes of the transmitted colour vectors match the receiver requirements. Now the three "demodulators" of the single-gun display are made by the screen structure itself and although the relative "gains," or conversion efficiencies, of the three phosphors may be adjusted so that an interfering signal in the band shared channel will appear with minimum luminance disturbance, the colour of the screen will no longer be white. Because the screen must show white when an unmodulated beam scans it, it is not possible to change the "gains" of the single-gun "demodulator?." Therefore an equi-amplitude chrominance vector is necessary.

In order to complement this equi-angular, equi amplitude chrominance signal, a luminance component of the form $E_L' = \frac{1}{3}E_R^{1/\gamma} + \frac{1}{3}E_G^{1/\gamma} + \frac{1}{3}E_B^{1/\gamma}$ is required to provide the residual drive signals, $E_R^{1/\gamma}$, $E_G^{1/\gamma}$, $E_B^{1/\gamma}$. (This composition also happens to satisfy the requirement giving the smallest voltage swings in the colour-difference gate circuits.)

It should now be clear that, unlike the three-gun shadow-mask display, the single-gun beam indexing tube when screened with phosphors of balanced efficiency is not at all well matched for *direct* use with the N.T.S.C. formulated signals. Even if the widths and spacings of the three phosphor strips were made to match the non equi-angular spacings of the N.T.S.C. chrominance vectors, both constant luminance operation would remain unachievable and there would be incorrect colour rendering.

It is possible to transform the N.T.S.C. luminance and chrominance components into a form suitable for a single-gun display and also permit constant luminance operation to be achieved.[8] (In practice, however, certain simplifications which do not give an exact transformation may be justified on the grounds of economy, even though the resulting colour reproduction will not be exact.)

Now the N.T.S.C. luminance signal is weighted according to the relative luminosities of the specified primaries, i.e.,

$$E_Y' = 0.30E_R^{1/\gamma} + 0.59E_G^{1/\gamma} + 0.11E_B^{1/\gamma}$$

but for the single-gun beam indicating tube, the required luminance signal E_L' is given by

$$E_L' = \tfrac{1}{3}E_R^{1/\gamma} + \tfrac{1}{3}E_G^{1/\gamma} + \tfrac{1}{3}E_B^{1/\gamma}.$$

The difference $(E_L' - E_Y')$ vanishes for a neutral colour, i.e., $E_L' = E_Y'$

$$\therefore (E_L' - E_Y') = \tfrac{1}{3}(E_R^{1/\gamma} - E_Y') + \tfrac{1}{3}(E_R^{1/\gamma} - E_Y') + \tfrac{1}{3}(E_B^{1/\gamma} - E_Y')$$

From the N.T.S.C. colour signal formulation,

$$(E_G^{1/\gamma} - E_Y') = -0.51\,(E_R^{1/\gamma} - E_Y') - 0.19\,(E_B^{1/\gamma} - E_Y')$$

$$\therefore (E_L{}^1 - E_Y') = 0.33\,(E_R^{1/\gamma} - E_Y') + 0.33\,(E_B^{1/\gamma} - E_Y') - 0.51\,(E_R^{1/\gamma} - E_Y') - 0.19\,(E_B^{1/\gamma} - E_Y')$$

$$= 0.16\,(E_R^{1/\gamma} - E_Y') + 0.26\,(E_B^{1/\gamma} - E_Y{}^1)$$

$$\therefore E_L' = E_Y' + 0.16\,(E_R^{1/\gamma} - E_Y') + 0.26\,(E_B^{1/\gamma} - E_Y')$$

Rewriting this in terms of N.T.S.C. colour difference signal weightings,

$$E_L' = E_Y' + 0.18\,\frac{(E_R^{1/\gamma} - E_Y')}{1.14} + 0.58\,\frac{(E_B^{1/\gamma} - E_Y')}{2.03}$$

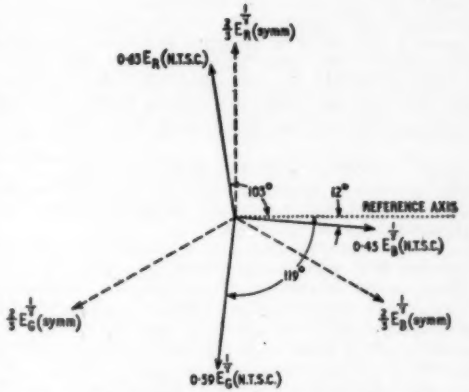

Fig. 5. Equi-angle and N.T.S.C. chrominance vectors.

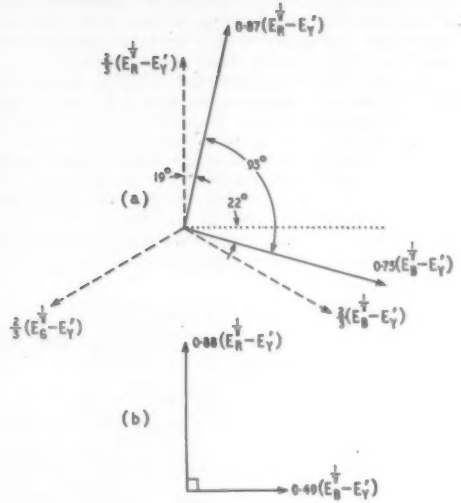

Fig. 6(a). Transformation of equi-angle vectors to two-colour difference vectors, (b) Orthogonal N.T.S.C. chrominance vectors.

i.e., the correcting signal $(E_L' - E_Y')$ which must be added to (E_Y') can be derived by demodulating the N.T.S.C. chrominance signal with a gain of $\sqrt{0.18^2 + 0.53^2} = 0.56$ and at an angle of $\tan^{-1}\frac{0.18}{0.53} \simeq 19°$ i.e., $0.56 \angle 19°$.

It is of interest to note that the luminance correcting signal is derived directly from the two colour difference chrominance components which have been band limited. These components, i.e. $(E_L' - E_Y')$ in no way impair luminance detail since, during an achromatic transition in picture information, $(E_L' - E_Y') = 0$ and the transition is described by (E_Y') only.

The N.T.S.C. chrominance signal can be transformed into an equi-angle, equi-amplitude signal and Fig. 6 (a) shows the redrawing of the required symmetrical vectors into two colour difference vectors. In order to facilitate this transformation, a signal $(-\frac{1}{3}E_Y')$ has been added to each vector.

These should be compared with the available N.T.S.C. colour difference vectors in Fig. 7, from which it will be seen that whilst the $(E_B^{1/\gamma} - E_Y')$ vector is greatly increased in amplitude, the $(E_R^{1/\gamma} - E_Y')$ vector is slightly reduced. In addition, the new vectors are no longer orthogonal, but are separated by an angle of 93°.

This vector transformation is conveniently accomplished with an amplifier whose gain is varied with the second harmonic of sub-carrier frequency, (ω_c). Let the gain $G = a\cos(2\omega_c t + \theta)$ and the input signal be $E_c = b\cos(\omega_c t + \phi)$. Then output $= GE_c = ab\cos(2\omega_c t + \theta)\cos(\omega_c t + \phi)$.

$$= \frac{ab}{2}\left\{\cos(3\omega_c t + \theta + \phi) + \cos(\omega_c t + \theta - \phi)\right\}$$

Filtering out all components above (ω_c), output $= \frac{ab}{2}\cos(\omega_c t + \theta - \phi)$. Clearly, this includes the input signal with a reversed phase sequence $(-\phi)$, and this may be added in a suitable proportion to the unmodified N.T.S.C. chrominance signal, see Fig. 7. It is suggested that this proportion and the phase (θ) of the frequency-doubled sub-carrier be adjusted when observing the output signal on a calibrated vectorscope. A suitable test signal consists of colour bars containing primaries, complementaries and a neutral. In practice it has been found possible to set the vector angles to within 2 or 3 degrees of their correct value.



Fig. 7. Transformation of N.T.S.C. colour difference vectors.

It will be appreciated that a beam indexing display when used with a N.T.S.C. type of signal needs to have rather complex signal translation apparatus in order to give correct colour rendition. There is, however, a further colour error for which correction should be provided. Fig. 8(a) shows a diagrammatic section of a typical beam indexing tube screen and a chrominance signal corresponding to a saturated blue field (the luminance value of the blue field is not considered here). Clearly, there will be considerable excitation of the adjoining red and green phosphors, and this will cause desaturation of the intended pure blue light. Although this defect does not cause serious distortion of pastel colours, the loss of saturation on highly coloured objects is rather objectionable and correction for this can take one of three forms.

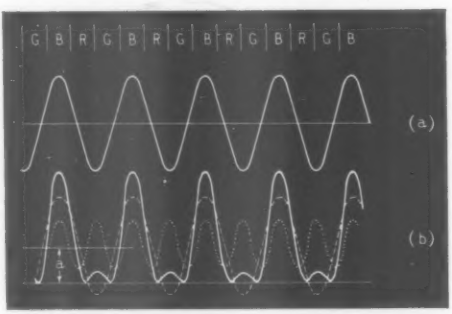

Fig. 8. (a) De-saturation of pure blue field. (b) Effect of adding 2nd harmonic term.

(i) The phosphor strips may be spaced with inert bands between adjacent colours, so that the conduction angle of the phosphors will be reduced.

(ii) The conduction angle can be reduced electrically by deducting from the luminance signal a signal proportional to chrominance carrier amplitude.[9] This idea is based on the fact that whilst the phase of the chrominance signal is proportional to saturation. An envelope detector will generate a signal proportional to saturation only, and this can be used to control the luminance amplitude. The inevitable decrease in brightness can be corrected by an increase in the gain of the chrominance channel.

(iii) The most satisfactory method for saturation correction requires the use of a second harmonic chrominance component which is added to the original chrominance signal[10]. In Fig. 8(b) is shown the effect of this where the added signal is of the form $a + b\cos(2\omega_n t + \phi)$ where (ω_n) is the colour switching rate.

(To be concluded)

REFERENCES

[1] Report of the Television Advisory Committee 1960 (H.M.S.O.).

[2] Bryan *et alia*, "A New Color T.V. Display—The Apple System," *I.R.E. Convention Record*, 1956, Part 3, p. 34 *et seq.* Also in *Proc. I.R.E.*, Vol. 44, p. 1108 *et seq* Sept. 1956.

[3] Patents, e.g., British patent No. 713641, Marconi's W/T Co. and L. C. Jesty, 1951.

[4] Report No. 7161R, March 1956, Hazeltine Research Corporation, p. 36, Appendix E. Also in Appendix B, "Principles of Color Television," by the Hazeltine Laboratories Staff, John Wiley & Sons Inc., 1956. Also see, C. J. Hirsch, *et alia*, "Principles of N.T.S.C. Compatible Color Television," *Electronics*, February, 1952, p. 90.

[5] Report No. 7174, July, 1955, Hazeltine Research Corporation, p. 4 *et seq.* Also Chap. 13, p. 436 *et seq.*, "Principles of Color Television," by the Hazeltine Laboratories Staff.

[6] K. G. Freeman, "A Gating Circuit for Single-gun Colour Television Tubes," *Brit. I.R.E. Television Convention* 1959, pre-print page 5. Also in *Journal Brit. I.R.E.*, Nov. 1959, Vol. 19, No. 11, p. 667 *et seq.*

[7] Report No. 7174, July 1955, Hazeltine Research Corporation p. 22 *et seq.* Also in Chap. 16 p. 471 *et seq.*, "Principles of Color Television," by the Hazeltine Laboratories Staff.

[8] B. D. Loughlin, "Processing of the N.T.S.C. Color Signal for One-Gun Sequential Color Display." *Proc. I.R.E.*, Jan. 1954, Vol. 42, No. 1, p. 299 *et seq.* Also, Chap. 16, p. 438 *et seq.* "Principles of Color Television," by the Hazeltine Laboratories Staff.

[9] D. G. Fink, "Television Engineering Handbook" McGraw-Hill, 1957, Chap. 16, pp. 251-252.

[10] G. S. Ley, "Color Purity in Ungated Sequential Displays," *I.R.E. Trans.*, Vol BTR—1, No. 1, p. 36, Jan. 1955.

Silicon Carbide Transistor

NEW HIGH-TEMPERATURE DEVICE

By MICHAEL LORANT

RESEARCH scientists of the Westinghouse Electric Corporation in the United States have recently developed a transistor capable of operating above 650 degrees Fahrenheit, a temperature higher than the melting point of lead. The new transistor is the first to be successfully made from silicon carbide, a hard crystalline material which, in impure form, is used as an abrasive in grinding wheels.

The high-temperature capabilities of the new transistor mark it as a significant advancement in the technology of these semiconductor devices. Present-day transistors, manufactured almost exclusively from germanium and silicon, can operate at temperatures no higher than about 200 degrees F (germanium) or 400 degrees F (silicon). Germanium and silicon transistors, however, cannot always meet the high-temperature requirements of today's existing and planned aircraft and space vehicles. Such applications, therefore, have furnished strong motivation for the development of higher-temperature transistors. Because of its great chemical stability and desirable electrical properties which it retains at elevated temperatures, silicon carbide is one of the most promising transistor materials for extremely high-temperature applications. Laboratory tests show that the new silicon carbide transistor still amplifies at 670 degrees F, and with further development, an upper operating temperature of more than 925 degrees F should be achievable.

The new device is actually a "unipolar" or "field-effect" transistor, which differs in operating principle from those usually made from germanium and silicon. Such conventional transistors regulate the flow of an electric current through them by the injection of electric charge carriers across a junction built into the semiconductor material. The unipolar transistor, on the other hand, acts more like a valve which opens and closes to regulate the electron flow.

The new transistors are made from exceptionally-pure crystals about two-thousandths of an inch thick. The necessary junction is built into the material by exposing it to vaporized aluminium at the white-hot temperature of 3,900 degrees F. The aluminium atoms diffuse into the silicon carbide crystal, changing its electrical behaviour from so-called n-type material to p-type. The junction is formed where the two types meet, and the process is controlled to an accuracy of a few millionths of an inch.

Then, to establish the input and output terminals of the transistor, the wafer is etched at two points in such a way that the silicon carbide is eaten away until the junction within the body of the crystal is reached. Electrical connections at these two points and to the body of the wafer complete the transistor.

A typical finished transistor is about 80-thousandths of an inch long and 40-thousandths of an inch wide, and the "working" area of the crystal surface is smaller than the head of a pin. Electrical measurements on the finished transistors show them to give a power gain of about 60 at room temperatures.

Electronic Telephone Exchanges

RECENT DEVELOPMENTS DISCUSSED AT THE I.E.E.

THE papers presented at the Institution of Electrical Engineers' Conference on Electronic Telephone Exchanges on November 22 and 23 were contributed by experts from Europe, Asia and America and covered a very wide field in considerable detail. They will be reprinted in full in 1961 in Part B of the Proceedings, and the following notes are intended only as an introduction for those who may wish to study the subject further.

Time Division

In Great Britain, feasibility studies of the design of a completely electronic exchange have been carried out. The studies, undertaken independently by the Post Office and five principal manufacturers of telephone equipment, and later by the Joint Electronic Research Committee, have resulted in the experimental exchange shortly to be installed at Highgate Wood, in London.

In order to provide consistency of service to subscribers during the experimental period, a complete electromechanical exchange will be installed. If, at any time, the electronic exchange is removed from service to allow modification, the mechanical system will function in its place, and in fact will remain permanently in service when the experiment reaches its conclusion.

The electronic system employs the time-division multiplex method of switching, each unidirectional "highway" carrying 100 channels. Each connection requires two antiphase channels, $\frac{1}{2}$ cycle (50μsec) apart, and is established by switching line and inter-highway diode gates by means of channel pulses, which are obtained from a channel store consisting of a circulating delay-line of the magnetostriction variety.

The central control equipment of the exchange is also, in the main, composed of magnetostriction delay-lines, which employ channel pulses to set up and supervise the progress of calls.

The speech-path channels are amplitude-modulated, the slight loss encountered during transmission through gates being made good by amplification in the demodulator.

Permanent control information, such as directory numbers, and transient information such as state of line, is stored on a magnetic drum. The drum is a magnetically coated cylinder with reading and writing heads. In the case of the permanent information, the writing head is normally isolated from its amplifier, to prevent accidental mutilation of the information. The type of permanent store employed lends itself to modification as a service expands.

When the design of the experimental exchange commenced, it was thought that transistors would restrict the transmission performance of the system and thermionic valves and semi-conductor diodes were chosen. It is reasonable to suppose that advances in semiconductor research have brought an exclusively solid-state exchange within the bounds of possibility.

Space Division

An American experimental exchange, the Morris Electronic Central Office, is described in a paper by Keister, Ketchledge and Lovell. This exchange, designed by Bell Telephone Laboratories, employs a space-division system using gas-filled diodes as switching elements. The diodes have a negative-impedance characteristic which offsets loss in transformers and other elements in the transmission path.

Permanent control information is stored in a flying-spot photographic store, while transient information is held on barrier-grid tubes.

The more important sections of the equipment are duplicated, while fault detection and, in certain cases, correction are automatic.

Novel facilities provided by the exchange include the possibility of obtaining frequently called numbers by dialling two digits only, and of connecting extension telephones, via the exchange, in an intercommunication circuit.

Switching Elements used in modern space-division systems fall broadly into two classes, electronic and electromechanical. Representative of the electromechanical switch are the reed relay, and a development known as the "ferreed."* The reed relay consists of contacts mounted on two metallic strips or reeds, the whole being mounted in a sealed glass tube. Surrounding the tube is a solenoid carrying the control current, which magnetizes the reeds and brings them into contact. Long life is a feature of this type of switch. In the ferreed, the reeds form part of a magnetic circuit, in part of which is ferrite material. The remanence of the ferrite is capable of maintaining closure of the contacts in the absence of controlling current.

Electronic switches include the neon-filled diode and the p-n-p-n junction diode. Both of these devices have the slight negative slope to their characteristics referred to earlier. The junction diode requires a much lower operating voltage than the neon diode, heat-dissipation problems with both these devices being negligible.

Exchanges employing time-division and space-division multiplexing are under active development in many parts of the world, and it may reasonably be assumed that one or more systems, both economically and technically competitive with the electromagnetic exchange, will have proved themselves within a few years.

* The Ferreed—A New Switching Device. A. Feiner *et al.* B.S.T.J. Vol. XXXIX. No. 1.

PHYSICAL SOCIETY EXHIBITION

MANUFACTURERS AND RESEARCH ESTABLISHMENTS EXHIBITING

THE 45th show of scientific instruments and apparatus which has become known as the Physical Society Exhibition will open at the Royal Horticultural Society's Halls, Westminster, on January 16th for five days. This year, however, the exhibition assumes a new official title, the Annual Exhibition of the Institute of Physics and the Physical Society, because of the recent amalgamation of the two organizations.

On a very large proportion of the 150 stands there will be equipment of interest to radio and electronic engineers and, as in the past, the emphasis will be on new developments in instruments and research techniques as well as on standard instruments and equipment.

From 10.30 to 2.0 on the opening day admission is limited to members of the society and the Press. On succeeding days the exhibition will be open to ticket holders at 10 a.m. It will close at 7.0 on the 16th, 18th, and 19th, at 9.0 on the 17th and 1.0 on the last day. Tickets are obtainable from exhibitors or from 47 Belgrave Square, London, S.W.1.

Wireless World, together with our associate journal *Electronic Technology*, are among the publications which have taken space in the exhibition.

The following demonstration-lectures will be given at 5.45 on the middle three days: "Hydrodynamic Research" by F. S. Burt of the Admiralty Research Laboratory (17th); "The Physics of the Oceans" by Dr. G. E. R. Deacon of the National Institute of Oceanography (18th); and "Some Physical Problems in Travelling at Supersonic Speed" by Dr. F. P. Bowden of Cambridge University (19th). The Acoustics Group is holding a symposium on traffic noise at 2.0 on the 18th.

A.E.I.
Admiralty Research Estabs.
Advance Components
Airmec
Archæology and the History of Art, Research Lab.
Avo

Baird & Tatlock
Baker, C., Instruments
Baldwin Industrial Controls
Barr & Stroud
Beck, R. & J.
Bellingham & Stanley
Birmingham University
British Iron & Steel Research Assoc.

C.N.S. Instruments
Cambridge Instrument Co.
Casella, C. F., & Co.
Cawkell
Cooke, Troughton & Simms
Cossor Instruments

D.S.I.R.
Dawe Instruments
Decca Radar
Distillers Co.
Dobbie McInnes
Doran Instrument Co.
Dynatron Radio

E.M.I. Electronics
Edwards High Vacuum
Ekco Electronics
Electro Methods
Electronic Instruments
Electronic Tubes
Electrothermal Engineering
Elliott Brothers
English Electric Valve Co.
Ericsson Telephones
Evans Electroselenium

Ferranti
Flann Microwave Insts.
Fleming, J. & R.
Fleming Radio
Furzehill Laboratories

G.E.C.
Gallenkamp, A., & Co.
General Radiological
Griffin & George
Guy's Medical School

Hilger & Watts

International Computers & Tabulators
Isotope Developments

Joyce, Loebl & Co.

Kelvin & Hughes

Labgear
Lintronic
Locarte Co.
Lucas, Joseph

M-O Valve Co.
Marconi Instruments
Marconi's W/T Co.
Marshall of Cambridge
Megatron
Mervyn Instruments
Metals Research
Ministry of Aviation
Morgan Crucible Co.
Muirhead & Co.
Mullard

N.G.N. Electrical
N.P.L. & Post Office Engg.
Nagard
Nash and Thompson
National Res. Dev. Corp.
New Electronic Products
Newport Instruments
Northern Polytechnic
Nuclear Enterprises (G.B.)

Oertling, L.
Oliver & Boyd
Optica United Kingdom
Optical Works
Ottway, W., & Co.

Panax Equipment
Paton Hawksley Electronics
Perkin-Elmer
Planer, G. V.
Plessey Co.
Post Office Engineering Dept.
Prior, W. R., & Co.
Pullin, R. B., & Co.
Pye, W. G., & Co.

Racal Instruments
Rank Cintel
Reading University
Royal College of Surgeons
Royal Meteorological Society
Royston Instruments

S.T.C.
Sanders, W. H. (Electronics)
Sangamo Weston
Science Museum
Servomex Controls
Shackman, D., & Sons
Singer Instruments Co.
Solartron Electronic Group
Solus-Schall
Stanton Instruments
Stanley, W. F., & Co.
Sunbury Glass Works

Taylor, Taylor & Hobson
Techne (Cambridge)
Telcon Metals
Texas Instruments
Thermal Syndicate
Thompson, J. Langham
Thorn Electrical Industries
Tinsley, H., & Co.
Tintometer
Towers, J. W., & Co.
Townson & Mercer
20th Century Electronics

U.K.A.E.A.
Ultrasonoscope Co.
Unicam Instruments

Venner Electronics
Vinten, W.

Watson, W., & Sons
Wayne Kerr Laboratories
Wray (Optical Works)

Industrial Groups—IV

WITH the growing practice of diversification in industry new names are coming into the field of radio and electronics as companies or groups are merged with concerns in such industries as mining, steel and ship-building. A case in point is **Metal Industries, Ltd.** The M.I. group which now comprises 38 companies in the U.K. and overseas and employs over 12,000 came into our field with the acquisition in 1959 of Avo (formed in 1923) and its subsidiary Taylor Electrical Instruments (1938). The group had been on the fringe of our field since its acquisition of several electrical concerns including Brookhirst Switchgear and Igranic Electric, now known as Brookhirst Igranic.

The group recently doubled its size with the acquisition of Lancashire Dynamo Holdings. Among the Lancashire Dynamo companies is Lancashire Dynamo Electronic Products and also the International Rectifier Company (Great Britain) which was formed in May, 1959, jointly by L.D. and the International Rectifier Corporation of Los Angeles.

The Metal Industries group now includes:—

Avo
Brookhirst Igranic
Cable Jointers
Cox & Danks
Crypto
Crypton Equipment
Dynamo & Motor Repairs
Farmer Brothers (Shifnal)
Fawcett Preston & Company
Foster Electrical Supplies
Foster Transformers
Hughes Bolckow
J. G. Statter & Company
John Allan & Company (Glenpark)
Lancashire Dynamo & Crypto
Lancashire Dynamo Electronic Products
Lancashire Dynamo Nevelin
Malcolm & Allan (London)
Metal Industries (Salvage)
Minerva Mouldings
New Eagle Foundry Company
Shipbreaking Industries
Taylor Electrical Instruments
Towler Brothers (Patents)

Overseas Companies

Brookhirst Igranic S.A. (South Africa)
Fawcett Preston (Europe) S.A (France)
Lancashire Dynamo Central Africa (Rhodesia)
Lancashire Dynamo South Africa
M.I. Australia
Metal Industries Europe S.A. (Belgium)
Olaer France S.A.

Associated Companies

Bepco Canada
International Rectifier Company (G.B.)
Soc. Representation d'Appareils Mecaniques (France)

Scientific Radio Conference

U.R.S.I. AND INTERNATIONAL RADIO MEASUREMENTS

By R. L. SMITH-ROSE, O.B.E., D.Sc., F.O.G.I., M.I.E.E.

DURING September, the International Scientific Radio Union held its XIIIth General Assembly at University College, London, when over six hundred scientists and engineers from twenty-four countries discussed various fields of scientific research ranging from precision laboratory measurements to the propagation of radio waves and communications in space. In his opening address, Dr. L. V. Berkner, the president since 1957, briefly reviewed the work of the Union over the past three years. It was during this period that the outstanding programme of the International Geophysical Year (1957/58) had been completed according to the carefully arranged plan, and this was followed by a year of International Geophysical Co-operation in 1959.

Since its formal organization in 1921 as an international scientific union, U.R.S.I. (the initials of its French title "Union Radio Scientific Internationale") has taken a keen interest in the characteristics of the atmosphere which determine the transmission of radio waves, and of the influence outside the atmosphere which determine these characteristics. It was thus perhaps a natural consequence that as the president remarked, U.R.S.I. was the first union to express its confidence in the scientific benefits that would result from artificial satellites in orbit around the earth. It is significant to note that the spectacular developments in the launching and use of such satellites and other vehicles in outer space have all taken place in the past three years. To deal with the scientific aspects of this work, an International Committee on Space Research (C.O.S.P.A.R.) was formed with U.R.S.I. as a charter member and having direct representation.

During the past triennium the allocation and protection of frequency channels for the use of radio astronomers has been actively discussed. With the coming of artificial earth satellites and their associated radio transmissions, this question has become of much greater importance. Although some frequency assignments were made for research purposes at the Geneva conference of the International Telecommunication Union at the end of 1959, it has been considered necessary to explore the future needs much more thoroughly; and at the recent U.R.S.I. General Assembly, representatives of U.R.S.I. and C.O.S.P.A.R., together with members of the International Astronomical Union, agreed to set up an inter-union committee for this purpose.

Scientific Programme of U.R.S.I.

The work of the International Scientific Radio Union is divided among seven commissions, dealing with individual portions of the field as indicated by their titles. These, together with the names of the chairmen appointed in September for the current three-year period (1960-63), are as follows:—

I	Radio measurements and standards	Dr. U. Adelsberger (Germany)
II	Radio and troposphere	P. Voge (France)
III	Ionospheric radio	J. A. Ratcliffe (U.K.)
IV	Radio noise of terrestrial origin	Prof. R. A. Helliwell (U.S.A.)
V	Radio astronomy	Prof. A. C. B. Lovell (U.K.)
VI	Radio waves and circuits	Dr. J. Loeb (France)
VII	Radio-electronics	Prof. W. G. Shepherd (U.S.A.)

At the General Assembly in London, the programme was arranged so that all these commissions met concurrently to discuss subjects which had been selected. A few joint sessions were also held to deal with subjects of common interest to two or more commissions. Outstanding among these was a morning session for the whole assembly allotted to the radio aspects of space research. Several papers described experiments made with rockets and satellites for studying the ionosphere and outer atmosphere as well as cosmic noise and solar ionizing radiations. Other papers stimulated a discussion on the scientific and technical aspects of communications by means of active and passive satellite relay systems. One of these papers outlined a proposal to discharge from a satellite large quantities of small metallic filaments into an orbital belt of microwave-resonant dipoles, which would reflect radio waves for long-distance communications purposes. This proposal was viewed with some misgivings by both optical and radio astronomers, since the existence of a permanent reflecting or scattering belt might seriously impair future scientific research in the astronomical field.

At the closing plenary session, the individual chairmen reported on the activities of their commissions and working parties; and put forward resolutions and recommendations for adoption by the Union. The individual papers presented at the meetings of all commissions, together with reports of the scientific discussions, will be published as a series of U.R.S.I. monographs in the near future. In the meantime, a brief review of some of the items discussed will be given in this and succeeding contributions.

It was at the closing session also, that the following officers were elected for the next triennium.

President:	Dr. R. L. Smith-Rose (U.K.)
Vice-Presidents:	B. Decaux (France)
	Professor I. Koga (Japan)
	A. Prochorov (U.S.S.R.)
	Professor G. A. Woonton (Canada)
Hon. Treasurer:	Professor Ch. Manneback (Belgium)

The Headquarters of the Union are at 7 Place Emile Danco, Brussels 18, Belgium, and the secretary-general is E. Herbays.

These, together with the commission chairmen listed above, will prepare for and organize the next General

Assembly to be held in Tokyo in 1963, when the Union will be celebrating its Jubilee. It grew out of the International Provisional Commission of Scientific Wireless Telegraphy formed in 1913.

From the earliest days of U.R.S.I., one of its most important activities has been to establish agreement throughout the world on the accuracy of measurement of such quantities as frequency, power and field-strength, which form the basis of all international research in the radio field.

As a result of intensive research and development over the past quarter of a century in several national laboratories, the frequency of an alternating current can now be measured to an accuracy which surpasses that of any other type of physical measurement. After passing through phases when a temperature-controlled tuning-fork and, later, a specially cut quartz crystal, formed the essential element in a standard frequency source, one of the resonant modes of a cæsium atom has now proved to be the most accurate and stable basis of reference.[1] The stability of radio-frequency oscillators controlled by a cæsium atomic standard has been shown to be of the order of one or two parts in 10^{10}.

Direct comparisons have been made in the same laboratory between the standard developed at the National Physical Laboratory in this country and the corresponding U.S.A. standard. The results[2] showed that the standards of the two countries agreed to within about 2 parts in 10^{10}, and that part of this discrepancy could be attributed to the different electronic arrangements used to drive the cæsium oscillators.

In order to state the actual frequency of such an oscillator, it is necessary to specify what standard of time is to be used. It is convenient for many purposes to adopt a uniform scale of time; but for precise scientific work, it is now internationally agreed that ephemeris time, which is based on the revolution of the earth round the sun, should be used. As a result of a joint programme of measurements carried out between the National Physical Laboratory in this country and the United States Naval Observatory, Washington,[3] the mean value of the frequency of the cæsium oscillator was found to be 9 192 631 770 cycles per second, with a probable error of ±20 c/s (Ephemeris Time). At the recent U.R.S.I. General Assembly, it was recommended that the Bureau International de l'Heure should keep under review the appropriate astronomical observations and announce a nominal value of this frequency for use during the following year.

In order to make such a standard available to users in various laboratories, programmes of international standard frequency transmissions have been established in several countries on various frequencies between 2.5 and 25Mc/s. In this country, the transmissions are emitted by a G.P.O. station at Rugby under the call sign MSF; and they are now supplemented on an experimental basis with a much lower frequency (16kc/s) from Rugby (GBR). These signals are measured at the N.P.L. by reference to the cæsium standard, and the values of the deviations from the nominal frequency are published monthly in *Electronic Technology*.

At a meeting of Commission I of the General Assembly of U.R.S.I., a review of the present position of "Standard Frequencies and Time Signal Transmissions" was introduced by U. Adelsberger (Germany), who gave particular attention to the problem of modulating or interrupting the continuous wave emissions in order to produce accurate time signal ticks. The Commission recommended that the day-to-day phase stability of the very low-frequency transmissions should be measured in various countries in order to assess their usefulness for high precision time synchronization and frequency comparison purposes.

Another radio measurement of reasonably high accuracy is that of the velocity of electromagnetic waves in a vacuum. At the XIIth General Assembly at Boulder, U.S.A., in 1957, a value of 299,792.5 ±0.4 km/s was adopted; and this has been found to give consistent results in the measurement of geodetic distances by electronic means. At the last Assembly it was recommended that agreed formulæ for the refractive index of the atmosphere should be adopted for both light and radio frequencies, so that the value of the velocity can be corrected for the appropriate ambient conditions, which prevail in practical use.

Considerable attention has been given by U.R.S.I. at previous meetings to the specification of field strength measuring techniques and their international comparison. As the frequencies in use have increased into the microwave region, it has become customary to specify a received signal in terms of power flux rather than field strength; and a recommendation was made in 1957 that the national laboratories should compare their standards of power measurement in the neighbourhood of 3,000 and 10,000Mc/s. On this occasion, a paper by J. A. Lane (U.K.), presented the results of measurements made at the Radio Research Station, Slough, at a frequency of 9.375 Gc/s (wavelength 3.2cm) on wire and film bolometers submitted by the National Bureau of Standards, Boulder, U.S.A., and by the University of Tokyo, Japan. The measurements were made in several ways, including one using a constant-flow water calorimeter in which the microwave power was dissipated.[4] The general conclusion from these comparisons was that the techniques used in the three participating countries agree within the limits of their estimated accuracy, about 1.5 or 2.0%.

In view of the general trend of radio research and application to increasingly higher frequencies, the U.R.S.I. General Assembly recommended that this work should be extended to 140 Gc/s; and that similar experimental comparisons should be made on other electrical parameters, such as voltage, attenuation, impedance and voltage standing-wave ratios in waveguides. Such measurements are clearly fundamental to the design of terminal radio equipment as well as to the study of radio wave propagation.

REFERENCES

[1] L. Essen and J. V. L. Parry. "The Cæsium Resonator as a Standard of Frequency and Time." *Phil. Trans. Roy. Soc.* 1957, Vol. 250, pp. 45-69.

[2] L. Essen and J. V. L. Parry; J. N. Holloway and W. A. Mairberger; F. N. Reder and G. M. R. Winkler. "Comparison of Cæsium Frequency Standards of Different Construction." *Nature*, 1958, Vol. 182, pp. 41-42.

[3] W. Markowitz and R. G. Hall; L. Essen and J. V. L. Parry. "Frequency of Cæsium in Terms of Ephemeris Time." *Phys. Rev.* Letters, 1958, Vol. 1, No. 3.

[4] (a) J. A. Lane. "The Measurement of Power at a Wavelength of 3cm by Thermistors and Bolometers." *Proc. I.E.E.*, 1955, Vol. 102, Part B, p. 819.

(b) J. A. Lane. "Transverse Film Bolometers for the Measurement of Power in Rectangular Waveguides." *Proc. I.E.E.*, 1958, Vol. 105, Part B, p. 77.

WORLD OF WIRELESS

Audio Festival

PLANS are well in hand for the International Audio Festival and Fair being organized by a committee of audio manufacturers for April 6th to 9th at the Russell Hotel, London, W.C.1. Over 50 British manufacturers are subscribers to this international show at which quality of reproduction will be the keynote.

The following have been elected to form the council:—H. J. Leak chairman, R. Merrick (Ferrograph) vice-chairman, R. Arbib (Multimusic), D. Chave (Lowther), Major J. F. E. Clarke (Clarke & Smith), H. Farquharson (Armstrong), H. S. Futter (Gramophone Co.), L. B. Livingstone (Tannoy), J. Maurice (Lustraphone), J. Rogers (Rogers Developments), L. Stone (E.A.R.), L. Smith (Wharfedale), J. Swift (Goodmans), P. Walker (Acoustical), and L. Young (Vitavox). G. A. Briggs (Wharfedale) and J. Maurice have been appointed Trustees.

In addition to the usual stands and individual demonstration rooms for the 60 or more exhibitors, plans are being made for special lecture sessions covering reproduction from disc, tape and radio. Admission to the exhibition will be by ticket obtainable free from exhibitors and audio dealers.

Further details are obtainable from C. Rex-Hassan, 42 Manchester Street, London, W.1.

Television Afloat

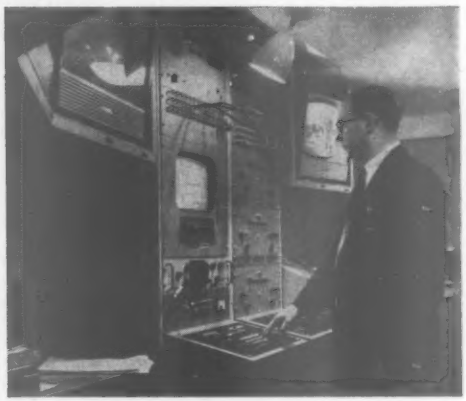

The new 42,500-ton P. & O. luxury liner Oriana, *now on her maiden voyage, has a television installation which provides not only a closed-circuit service but also for the reception of 405-, 525- and 625-line transmissions. The incoming television signals are, where necessary, converted to 525 lines for display on Ekco receivers and, moreover, where alternative programmes are available the viewer can make his own choice. Initially 60 receivers have been installed in public rooms and first-class cabins but provision is made for nearly 400. The television system was installed by Marconi's who also provided the ship's communications equipment, navigational aids and sound reproducing equipment incorporating 1,600 loudspeakers.*

Radio Research

MANY interesting aspects of the research programme initiated by the Radio Research Board and carried out by the Radio Research Station at Slough are given in "Radio Research 1959"* which contains the report of the Board and of the Director of Radio Research. As might be expected the advantages to research in radio propagation afforded by rockets and satellites is given more than a passing reference. O. W. Humphreys, chairman of the Board, stresses that in order to obtain the full effect from the opportunities offered, the Radio Research Station "should devise its own experiments for flying in rockets and satellites." The proportion of the station's effort devoted to the general field of space research is being increased to 50%.

The present members of the Board are:—Prof. H. E. M. Barlow (University College, London), Prof. W. J. G. Beynon (University College of Wales), Dr. R. L. F. Boyd (University College, London), Prof. E. C. Cherry (Imperial College, London), O. W. Humphreys (G. E. C. Research Labs.), Dr. F. E. Jones (Mullard), K. I. Jones (Ferguson), C. J. V. Lawson (Cable & Wireless), F. C. McLean (B.B.C.), A. W. Montgomery (S.T.C.), Capt. J. S. Raven (Admiralty) and Capt. F. J. Wylie (Radio Advisory Service).

The 22-page report of Dr. R. L. Smith-Rose is of particular interest as it is his last as Director of Radio Research; he is succeeded by J. A. Ratcliffe.

*H.M.S.O. 3s.

College of Aeronautics.—For the past year or so the College of Aeronautics, Cranfield, Bletchley, Bucks., has been pursuing a policy of diversification of teaching activities, and as a result a number of new advanced courses have been developed in subjects which although relevant to aeronautics are of equal interest to many other branches of engineering. It has therefore been decided to change the titles of some of the departments thereby giving a better indication of the scope of their activities. Under this re-arrangement the Department of Aircraft Electrical Engineering becomes the Department of Electrical and Control Engineering. Professor G. A. Whitfield has been head of the department since its formation in 1955. In addition to providing specialized courses for aeronautical engineers as part of the two-year diploma course the department is now offering advanced courses in industrial control engineering and flight control as well as courses in space technology and guided missiles.

Satellite Tracking.—Two of the chain of 18 stations to be used for tracking the first American manned space satellite—those at Kano (Nigeria) and Zanzibar—are to be staffed by Cable & Wireless men for maintaining point-to-point communications. The stations will be linked by radio to London whence information will be passed to the U.S.A. *via* the transatlantic cable. W. A. Coslett, who during the war was engineer-in-charge of one of the mobile telecommunication units known as Blue Trains and until his retirement in 1959 at the age of 55 was C. & W. manager in Jamaica, has been appointed engineer-in-charge at Kano. The assistant engineers are J. D. Munday and T. Shepherd. At Zanzibar, D. G. Hicks will be E.-in-C. with P. J. Harlow and D. J. Payne as assistants.

S.O.N.D.E.—The Society of Non-Destructive Examination is to hold the first Croxson Memorial Lecture (in memory of the late Charles Croxson the founder chairman) on February 17th at 6.15 in the Caxton Hall, Westminster. Dr. L. Mullins will speak on "The Evolution of Non-Destructive Testing". Free tickets—not more than two per applicant—are obtainable from the Hon. Secretary of the Society, D. T. Carter, E.S.A.B. Ltd., Gillingham, Kent.

Computer Consortium.—The reconstituted British Conference on Automation and Computation, of which Sir Walter Puckey is chairman, has set up three panels to cover the following aspects of its interests:—education and training (with Professor G. D. S. MacLellan, of Glasgow University, as chairman); research and development (J. F. Coales, Cambridge University); and public relations (W. C. F. Hessenberg, British Iron and Steel Research Association). The general title of the conference of the B.C.A.C. to be held in Harrogate from June 27th to 30th is "Automation—Men and Money".

Television Society.—Sir Harold Bishop, Director of Engineering, B.B.C., has accepted the invitation of the Television Society to become president in succession to the late Sir George Barnes. He took office on December 8th for two years. The Society, which was formed in 1927 "for the furtherance of research in television and allied problems" now has a membership of over 1,200.

R.S.G.B. Membership.—For the fourth successive year after a period of recession the membership of the Radio Society of Great Britain had again increased at the end of June, 1960, when it passed the 10,000 mark. The year's increase recorded in the Society's annual report was 496 bringing the total to 10,036. Of the U.K. total of 8,729 holders of amateur (sound) licences, 6,473 (60%) were members of the Society.

Annual Dinner of the Royal Flying Corps Wireless Operators Old Comrades Association will be held in London on March 18th. Details are obtainable from E. J. F. C. Hogg, 57 Hendham Road, London, S.W.17.

African Radio Union.—Broadcasting organizations in Morocco, Tunisia, the United Arab Republic, Ghana, Guinea and Libya have set up an international organization under the name of African Radio Union. Principal aim of the Union is for technical and administrative co-operation between the different national broadcasting organizations in Africa. Abdoulaye Toure, director of the state-owned broadcasting service of Guinea, is the first president.

V.H.F. Sound Broadcasting.—The sixth edition of the list of European v.h.f. sound broadcasting stations, giving the situation on January 1st, will be published by the European Broadcasting Union early in February. The cost, including five bi-monthly supplements, is 50 Belgian francs. The list can be obtained from the E.B.U. Technical Centre, 32 avenue Albert Lancaster, Brussels 18, Belgium.

Receiving Licences.—During October the number of combined television and sound licences current in the U.K. increased by 82,397 bringing the total to 10,962,867. Sound-only licences totalled 4,226,094 including 459,856 for sets fitted in cars.

Pulse Techniques.—An 11-week laboratory course on pulse techniques begins at the Borough Polytechnic, Borough Road, London, S.E.1, in January. It will be held on Monday afternoons commencing January 9th and will be repeated on Thursday evenings from January 12th. The course will also be repeated on Monday afternoons from April 10th. (Fee £1).

Educational Publications.—The latest pamphlets in the series "Demonstrations and Experiments in Electronics" issued by the Mullard Educational Service give details of an all-transistor one-watt amplifier (No. 13) and an "echo" method of determining the velocity of sound (No. 14). The pamphlets are available free to schools, technical colleges and training establishments from the Mullard Educational Service, Mullard House, Torrington Place, London, W.C.1.

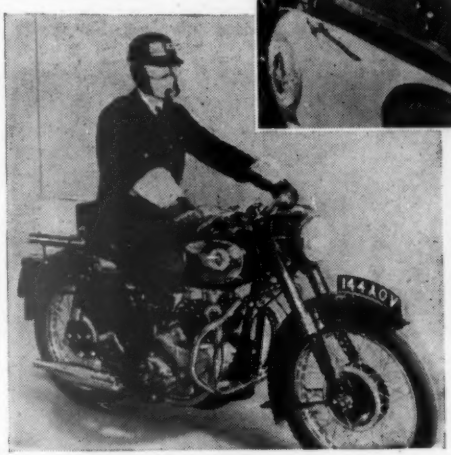

Police Radio—Features of this latest motor-cycle f.m. transmitter-receiver, produced by G.E.C. to a Lancashire Police design, are a handlebar press-to-talk switch, loudspeaker unit on the petrol tank and microphone-earpiece in the helmet.

Television receiver production in Hungary for the next five years, has been planned to total 1M. More than half the receivers are scheduled for export.

Moscow TV.—A tower carrying the aerials for five transmitters is a feature of the new television centre being built in Moscow.

Can you Help?—An American reader is anxious to secure a copy of *Wireless World* for January, 1952, to complete a 15-year file. Offers should be addressed to the Editor.

CLUB NEWS

Bradford.—Dr. G. N. Patchett of the Bradford Technical College will speak on transistors at the January 10th meeting of the Bradford Amateur Radio Society. A fortnight later D. Millard (G3OGV) will deal with amateur receiver alignment. The club meets at 7.30 at Cambridge House, 66 Little Horton Lane.

Cleckheaton.—"'Scope Interpretation" is the title of the talk to be given by T. C. Isaac of Bradford Technical College at the January 4th meeting of the Spen Valley Amateur Radio Society. On the 18th a member of staff of Philips Electrical will discuss tape recording. Meetings are held at 7.30 at the Labour Rooms.

Mitcham.—Lifeboat radio equipment is the subject of the talk being given by W. D. Pye to the Mitcham and District Radio Society on January 13th at 8.0 at "The Canons," Madeira Road.

Personalities

G. A. Marriott, B.A., is retiring in March from the managing directorship of the M-O Valve Company, a wholly owned subsidiary of the G.E.C., and is to be succeeded by **J. Bell,** B.Sc., F.Inst.P., at present deputy director and manager of G.E.C. Research Laboratories, and a member of the M-O Valve board. Mr. Marriott, who is 68 and a graduate of Caius College, Cambridge, has been with the G.E.C. throughout his professional life. He served on the board of the British Radio Valve Manufacturers' Association (B.V.A.) for nearly 20 years, and is now chairman of V.A.S.C.A., the associated organization which was formed in 1959 to take over from the B.V.A. the responsibilities for semiconductors and industrial valves and tubes. He was president of the Brit.I.R.E. from 1956 to 1958. Mr. Bell, deputy director of the G.E.C. Research Laboratories, Wembley, where he was manager of the telecommunications division from 1953 to 1958, was appointed to the board of the M-O Valve Company a few months ago.

G. A. Marriott

J. Bell

Paul Adorian, M.I.E.E., M.Brit.I.R.E., F.C.G.I., managing director of Associated-Rediffusion Ltd., has been elected a Fellow of the Institute of Radio Engineers of America, "for the development of electronic distribution networks used in broadcasting and television." He is the only British recipient among the 76 elected for 1961. Mr. Adorian is on the board of a number of companies within the Rediffusion group and is chairman of Central Rediffusion Services Ltd., Redifon Ltd., and Rediweld Ltd.

E. S. Hall, M.I.E.E., this year's chairman of the Rugby Sub-Centre of the I.E.E., is a director of A.E.I. Sound Equipment, Ltd., and divisional assistant chief engineer of A.E.I. Electronic Apparatus Division, New Parks, Leicester. He joined B.T.H. as a student apprentice in 1924 and on completion of the course in 1929 went to the research laboratory on the development of sound film equipment. In 1946 he was appointed chief assistant to the manager of the B.T.H. Electronic Engineering Department. Mr. Hall has held his present position since the formation of the A.E.I. divisions in 1959.

R. H. Booth, at one time chief engineer of the industrial division of E.M.I. Electronics Ltd., which he joined in 1949, and now personal assistant to the company's technical director, has gone to North America for a two-year tour of duty. He will maintain liaison with E.M.I.'s representatives in the U.S.A. and undertake a survey of the American market.

Professor F. C. Williams, O.B.E., D.Sc., D.Phil., F.R.S., of Manchester University, has received the American John Scott award in recognition of his work on the development of I.F.F. (Identification, Friend or Foe) during the war. Dr. Williams, who joined Watson-Watt's radar research team at Bawdsey in 1939, was employed throughout the war on radar circuitry. In 1947 he was appointed professor of electrotechnics at Manchester University, where he is now professor of electrical engineering and has been working on the development of digital computers. He is 49. The John Scott award is made by the City Trust of Philadelphia for "developing inventions for the benefit of mankind."

Professor A. C. B. Lovell, O.B.E., F.R.S., director of the Nuffield Radio Astronomy Laboratory of the University of Manchester at Jodrell Bank, has been awarded one of the two Royal Medals of the Royal Society for 1960, "for his distinguished contributions to radio astronomy."

Dr. D. Gabor, professor of applied electron physics at Imperial College, and **Dr. D. Jones** have been granted £2,000 by the Paul Instrument Fund Committee of the Royal Society for additional equipment for use in connection with the development of an electron interference microscope.

W. E. J. Farvis, B.Sc.(Eng.), M.I.E.E., senior lecturer in applied electricity and head of the post-graduate School of Electronics and Radio at Edinburgh University, has been appointed to the newly established chair of electrical engineering at the university. He has been in the Electrical Engineering Department for the past 12 years, prior to which he was for three years a lecturer at University College, Swansea. During part of the war he was engaged on the development of decimetric radar systems and later headed a radio counter-measures group.

P. L. Stride, formerly manager of Ekco's Malmesbury works, has become manager of the aviation division of Ekco Electronics Ltd., which is now centred at Southend. The division handles the design and technical liaison for ground and airborne equipment for the aviation industry. **P. J. Harvey,** formerly chief electronics engineer, becomes manager of the nucleonics and industrial division which is responsible for research and development covering nucleonic and physical instrumentation and control. **E. B. Thompson** continues handling the commercial activities of both divisions as sales manager.

S. R. Mullard, M.B.E., recently celebrated his 40th anniversary as a director of the Mullard company. He is seen here with (left) Sir Arthur Vere Harvey, C.B.E., M.P., who has been with the company 25 years and (right) S. S. Eriks, O.B.E., managing director of the company.

Sir Leslie Gamage has retired from the chairmanship of the General Electric Company and is succeeded by **Arnold Lindley,** who joined the company as an engineering apprentice in 1918. In 1958 he was made an assistant managing director in charge of the company's heavy engineering group, and for the past 18 months has been vice-chairman and a managing director.

E. Green, M.Sc., M.I.E.E., formerly head of the transmitter advanced development group of Marconi's, and for the past six years consultant engineer to the company, has retired. He has been with Marconi's since graduating at Manchester University in 1913. In his early days with the company Mr. Green was engaged in the installation of marine radio equipment and in 1915 he was seconded to the R.N.V.R. and was sent to Hong Kong to assist in the installation and operation of a 25-kW spark set and a Poulsen arc transmitter for the Royal Navy. In the years following World War I, he was assistant to C. S. Franklin during the whole of the development work on the short-wave beam system. His textbook "Amplitude-Frequency Characteristics of Ladder Networks" is a standard source of reference.

E. Green

L. C. Jesty

L. C. Jesty, B.Sc., M.I.E.E., has been appointed manager of Sylvania-Thorn Colour Television Laboratories in succession to **B. C. Fleming-Williams,** B.Sc., A.M.I.E.E., who has resigned. Mr. Jesty joined the Laboratories in 1957, and has been mainly responsible for the research and development programme on colour television and cathode-ray tubes. For seven years prior to joining the Laboratories he was with Marconi's, where he led the television research group and was closely associated with the development of the Anglicized version of the American N.T.S.C. colour system. From 1927 to 1946 he was at the G.E.C. Research Laboratories, and for three years at the Cinema-Television Laboratories. **J. K. Oxenham,** M.A., who has been in charge of the circuit work on colour and closed-circuit television at the Sylvania-Thorn Laboratories, has been appointed deputy manager.

T. E. Greenfield has been appointed sales development manager of the industrial process control division of Gresham Automation Ltd. After war service in the Merchant Navy he joined J. Langham Thompson Ltd. in 1946, and three years later went to the General Electric Co. at Stanmore, where he was concerned with flight instrumentation trials. In 1953 he returned to J. Langham Thompson, and since 1957 he has been with English Electric Aviation Ltd. He was appointed head of quality control for the production of guided weapons at their Stevenage works, and was also test project engineer for the Thunderbird II.

The Rietzke Award being received from the donor Eugene Rietzke, founder and president of Capitol Radio and Engineering Institute, of Washington, by Sgt. J. H. O. Willacy "the airman showing the greatest promise in the field of electronics" at the R.A.F. Bomber Command Station at Cottesmore, near Oakham, Rutland. On the left is Air Commodore J. R. Morgan, Command Education Officer, and on the right Group Captain A. D. Mitchell, station commander. Some 70 airmen on the station took the electronics course of C.R.E.I.

J. D. MacEwan, B.Sc., A.M.I.E.E., A.M.Brit.I.R.E., has been appointed by the B.B.C. engineer-in-charge, television, Birmingham, in succession to **H. G. Whiting,** who recently became Regional Engineer, Midland Region. Mr. MacEwan joined the Operations and Maintenance Department of the B.B.C. in 1947. Since 1956 he has been senior lecturer (technical operations) at the Corporation's Engineering Training Department.

G. W. Short, the first part of whose article on the bootstrap follower is on page 21, was for two years on the editorial staff of our sister journal *Electronic Technology* until 1958, when he joined the B.B.C. He served in Royal Signals from 1944 to 1947. He then went to Oxford University, where he graduated in 1951 and the following year received his M.A. From 1953 to 1956 he was assistant press officer at Mullard's.

Horace Freeman, who, as already announced, retired recently from active business life after spending nearly 40 years in radio and electrical advertising, has been elected an honorary vice-president of the Radio Society of Great Britain. It was appropriate that the certificate was presented to him at the opening of the Radio Hobbies Exhibition in the Royal Horticultural Society's Old Hall, for it was there that he organized the first all-British wireless exhibition in 1922.

B. M. Lee, son of E. M. Lee, director and general manager of Belling & Lee, Ltd., has been appointed manager of the company's industrial group and to the board of executive directors.

OBITUARY

Dr. W. R. G. Baker, vice-president of the General Electric Company of America when he retired in 1958, has died at the age of 67. He joined the company in 1917. Since his retirement he had been vice-president of Syracuse University. Dr. Baker's best-known contribution to the American radio industry is probably the direction of its two National Television System Committees, the first to establish standards for the American monochrome service and the second, appointed in 1950, to set up standards for what is now known as the N.T.S.C. colour system.

News from Industry

Telemeter "Pay-TV."—A new company, British Telemeter Home Viewing, has acquired from International Telemeter Co. the British rights of the "Pay-TV" system developed by its associates, Paramount Pictures Corp. The system, which is being used in a pilot scheme in Toronto, provides for the reception of a television programme specially transmitted by wire or over the air which is un-scrambled by a coin-in-the-slot unit fitted to a standard receiver. The subscribers to the new company include British Lion Films and the Granada Group.

Decca.—E. R. Lewis, the chairman of the Decca Record Company, announced at the extraordinary general meeting on November 10th that the year's results for the group were "by far the best in the company's history." The balance from the trading account was £3,714,547—an increase of some £400,000 on the previous year. The net balance carried forward was £1,821,984, a 28% increase on the previous year.

Plessey's consolidated profit and loss account for the year ended last June shows a trading profit of over £4M. After allowing for taxation and making various deductions the balance carried forward into the current year was £2,240,044 compared with £1,536,042 the previous year.

M.S.S. Recording Company have arranged with E.M.I. to manufacture and distribute the discs and disc cutting apparatus previously undertaken by M.S.S. who are concentrating on the production of their Mastertape and Data Tape.

Non-destructive Testing.—Solus-Schall, Ltd., of County Building, Honeypot Lane, Stanmore, Middx., have produced an information booklet reviewing the site methods of non-destructive testing provided by the company. Copies of the booklet are available free of charge.

The Gramophone Company are developing a combined four-track tape recorder and 45/33 r.p.m. record reproducer in which the tape and record are driven (simultaneously if required) by means of the same motor.

Aero Electronics Ltd., of Gatwick Airport, have been appointed the exclusive export agents and sole distributors to U.K. aircraft manufacturers of the products of Communications (Air) Ltd., of Bagshot, Surrey. Their products include a V.O.R./I.L.S. simulator and airborne V.O.R./I.L.S. equipment.

Beme Telecommunications Ltd., of 24, Upper Brook Street, London, W.1, a member of the Derritron Group of companies, has announced two new marine radio products—a depth indicator and a f.m./a.m. receiver. The transistor depth indicator "Diver 60" has a range of 0 to 360 feet.

Southern Instruments Ltd., who in association with the Drayton Regulator and Instrument Company of West Drayton, some months ago formed Drayton-Southern Ltd. (specializing in instrumentation and control systems), have more recently formed Storno-Southern Ltd. in association with the Danish Storno Radio Co. Storno-Southern is to manufacture in this country under licence v.h.f. communications equipment designed by the Copenhagen company. Another company, Southern Analytical Ltd., has been formed to take over the analytical instrument work of the parent company.

Ocean Weather Ships.—Four transmitters, eight receivers and two direction-finders are being supplied by Marconi's for each of two frigates *Amberley Castle* and *Pevensey Castle* which are being converted for use as ocean weather ships. The company is also modernizing Admiralty ranging and height-finding radar in the vessels. *H.M.S. Amberley Castle* has been renamed *O.W.S. Weather Adviser.*

Raytheon Co., of Waltham, Mass., have supplied two air traffic control radar systems for Switzerland's major air routes. The radars will be connected by microwave links to the Geneva-Cointrin and Zurich-Kloten airports which they will serve. The Geneva installation will be located on the 5,500-foot La Dole, 16 miles away, and the Zurich equipment on a mountain some seven miles away.

Central Electronics Inc., the recently formed wholly-owned French subsidiary of Zenith Radio Corporation, are building a factory in Paris for the production of components and receivers.

J. W. Maunder, U.K. agent for Shure audio components, now has an office at 22 Orchard Street, London, W.1 (Tel.: Hunter 4116).

NEW FACTORIES

Associated Transistors, Ltd., which is jointly operated by A.T.E., English Electric and Ericsson Telephones, has acquired an 18-acre site at Basingstoke, Hants, on which a transistor factory covering about 120,000 sq ft is to be built.

G.E.C.—A mill at Reddish, near Manchester, has been acquired by the G.E.C. Semiconductor Division. It will be known as Broadstone Works and has a working space of 600,000 sq ft. Manufacture of semiconductors is expected to start in the early part of this year.

Nottingham Electronic Valve Co., Ltd., manufacturers of Nev cathode-ray tube pumping equipment, have moved their offices and works from Netherfield to Main Street, East Bridgford, Notts. (Tel.: East Bridgford 276).

Elremco.—An extension to their factory at Bush Fair, Harlow, Essex, has increased the production area of the Electrical Remote Control Co. to 14,000 sq ft.

Marconi's Aeronautical Division is being regrouped in new premises at Basildon, Essex, where the bulk of the company's aeronautical equipment is manufactured.

L. E. Simmonds Ltd., relay manufacturers of 5 Byron Road, Harrow, Middx., have opened a new factory at Thetford, Norfolk. The factory gives an additional 6,000 sq ft to the company's present manufacturing capacity at Harrow, which will remain the headquarters.

Alma Components Ltd., manufacturers of precision wire-wound resistors, have recently opened a new factory in Diss, Norfolk (Tel.: Diss 2288). The London works have been closed but an office is being maintained at the old address: 551 Holloway Road, London, N.19 (Tel.: Archway 0014).

Sifam.—A new factory with a total floor area of 21,000 sq ft and accommodation for 260 employees has been opened in Torquay by Sifam Electrical Instrument Co.

We can get you out of a series of stabiliser problems

with this **NEW** G.E.C. valve

Here is our new low impedance double triode, the 6080 WA. In the first place, you save space with these two valves in one envelope. In the second place, here is a really fine, special quality double triode, the result of our 40 years of experience in manufacturing valves of all kinds. Full information on all Series Stabilisers, including the 6080 WA is available, as well as a detailed report on the design of Series Stabiliser circuits.

6080 WA

Maximum anode voltage	250V
Maximum cathode current	2 x 125mA
r_a	230+230Ω

The full range of series stabilisers cover these powers: 80 mA at 250V to 1·5A at 2kV

G.E.C.

Please write to:

THE M-O VALVE CO LTD

BROOK GREEN HAMMERSMITH LONDON W6

A Subsidiary of The General Electric Co Ltd

DON'T CUT THE TOP OFF

A tape recorder is only as good as its microphone. If you cut a top note off in the mike, you can't blame the recorder if the note isn't there. If there's distortion at the start, there'll be a din in the end. Give your recorder a fair chance. Give it a balanced, wide-frequency input. Give it a good microphone. Give it an Acos microphone.

USE AN ACOS MICROPHONE

MIC 39

A crystal hand microphone of exceptionally attractive appearance. Extended frequency response; noise-free cable and die-cast liner to minimise hum and ensure excellent signal-to-noise ratio. Available with table-stands and floor stand adaptor. U.K. Retail price 3 gns. Other Acos microphones include the famous fold-away MIC 40 (35/-) the MIC 28 Lapel Microphone (50/-) and a superb new stereo microphone (£6.6.0)

Acos microphones are standard equipment with most British high-quality tape recorders.

acos ARE also DOING THINGS IN STYLI

COSMOCORD LTD WALTHAM CROSS HERTS · TEL: WALTHAM CROSS 25206 (London subscribers please dial WS 25206)

TRANSISTOR INVERTER

By F. BUTLER,
O.B.E., B.Sc., M.I.E.E., M.Brit.I.R.E.

FREQUENCY STABILIZED CIRCUIT SUITABLE FOR RUNNING A TAPE RECORDER

HIGH-POWER transistor inverters commonly use two or a multiple of two transistors in a special type of push-pull oscillator circuit which is designed to give a square-wave output. High-efficiency operation is secured because the transistors alternate between two conditions in each of which the internal energy dissipation is very low. In one condition the transistor is cut off and there is no energy loss. In the other state the transistor is bottomed and although it then carries a large current the voltage drop across it is quite small and the energy loss is again very low.

If a sinusoidal output waveform is required the maximum efficiency is lower and cannot possibly exceed 78.5 per cent. In a practical case the efficiency would be nearer 60 per cent compared with about 85 per cent for the square-wave case.

Frequency Stability of Self-excited Inverters.—Push-pull square-wave oscillators are of two distinct types. In one of these the rectangular waveform results from magnetic saturation effects in the core of the oscillator transformer. High-efficiency operation therefore calls for the use of low-loss core materials. Suitable magnetic alloys are expensive but economy in the core size can be achieved by operation at a relatively high frequency, usually between 400 and 1,200 c/s. Within this range of frequencies the sum of all the losses (eddy current, hysteresis, dielectric and copper winding resistance) reaches an acceptable minimum value.

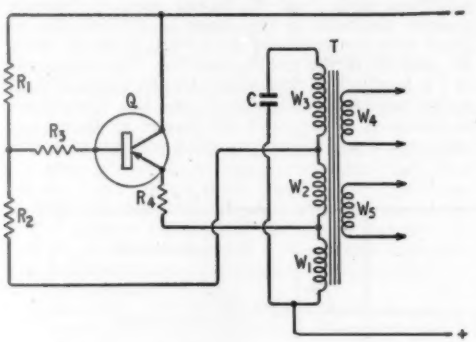

Fig. 1. Driver oscillator circuit for frequency-stabilized inverter.

The second type of self-excited square-wave generator also employs a ferro-magnetic core but operates at flux densities which are always below the saturation level. Losses are thus reduced and it becomes possible to make use of conventional core materials. Amplitude limiting of the square-wave output is in this case caused by cut-off or saturation (bottoming) in the transistors. These must be accurately matched if it is important to generate a square-wave output with a mark-to-space ratio of unity.

Oscillators which make use of core-saturation effects generate a frequency which is proportional to the battery supply voltage. A constant output frequency thus calls for a regulated power supply. The output frequency is not markedly dependent on the connected load. A valuable feature is that the circuit is self protecting against overloads.

By contrast, inverters which operate with unsaturated transformers deliver an output frequency which is dependent on the supply voltage and on the connected load. A heavy overload will normally result in the destruction of the transistors.

Constant-frequency Inverters.—When used for d.c. to d.c. conversion there is no particular need to specify precisely the frequency of the oscillator. It is convenient to make this fairly high in order to simplify the output filtering arrangements, and a value in the region of 1000 c/s is entirely suitable.

There are cases in practice where there is no such latitude regarding the choice of output frequency. This is certainly true if the equipment to be operated contains squirrel-cage or synchronous motors which are required to be run at a fixed speed. A tape-recorder capstan drive motor comes into this category and for use in vehicles, in aircraft, or on board ship it must be supplied from a battery-operated constant-frequency a.c. source.

To operate mobile equipment a 28-V d.c. supply is normally available. Experience shows that it is possible to design an inverter for operation from such a supply which will give a continuous output of 100 W at any fixed frequency between 40 and 60 c/s.

In principle, a constant output frequency could be derived by amplifying the output of a low-power oscillator of stable frequency. If a sinusoidal voltage waveform is required with a substantial power output, a practical scheme would be to drive a Class-B amplifier from the oscillator, using intermediate amplifiers as necessary. Such an assembly would be expensive and inefficient. At best, the output stage would have an efficiency of under 70 per cent. The amplifier would have a high output impedance so that the voltage regulation would be extremely poor. This could be corrected by the use of negative feedback which in turn would call for higher gain in the amplifier, requiring at least one extra stage. At

the expense of further circuit complication it might be possible to devise some form of automatic gain control to give a constant output voltage.

The situation is much more favourable if a square-wave output is acceptable. It is not considered very good practice to run large a.c. motors under these conditions. Heating is increased by the harmonic currents and the motor may tend to "cog" round at a small fraction of its fundamental synchronous speed. Nevertheless, many low-power motors appear to perform satisfactorily with a square-wave input.

In respect of its output impedance, the square-wave inverter is effectively an electronic switch, periodically reversing the supply battery connections to the primary of the inverter transformer. The output impedance at the transformer secondary terminals includes the secondary winding resistance plus the total primary circuit resistance referred to the secondary side, i.e. multiplied by the square of the transformer turns ratio. It also contains a term sufficient to account for all the other circuit losses. The voltage regulation of an inverter is normally about 20 per cent between no load and full load. During the conduction phase there is also a voltage drop across each transistor of about 0.75 V. Assuming that a 28-V battery supply is used, this is responsible for a further reduction in efficiency of 2.7 per cent.

As regards the design of a constant-frequency oscillator to drive the square-wave amplifier there are two possibilities to be considered, remembering that the output stage calls for a substantial drive power. One is to use a high-power tuned-circuit oscillator and the other is to use a low-power version, say of the Wien bridge type, followed by an intermediate power amplifier. The requirements for high oscillator stability and high output power are incompatible, but the amplifier drive power requirements can be reduced by making this stage regenerative. Sufficient positive feedback may be applied from the output stage to cause incipient self-oscillation and if the regeneration control is adjustable it may be set at such a level that only moderate power demands are made on the stable-frequency driving source. This technique is used in the actual equipment to be described later.

A circuit diagram of the 50 c/s oscillator is shown in Fig. 1. It is of a conventional feedback type, the arrangement being such that the transistor collector terminal may be connected directly to the negative supply lead which is at earth potential. The chassis can thus be employed as a convenient heat sink. The iron-cored transformer T carries five windings. Of these, W_4 and W_5 are the output secondaries used to couple the oscillator stage to the output amplifier. The primary windings W_1, W_2 and W_3 are connected series aiding, the total inductance being such as to resonate with C at a frequency of 50 c/s. A convenient value of C is about 0.5 μF which calls for a very large number of turns on W_3. The windings W_1 and W_2 are calculated to provide the requisite feedback voltage for reliable oscillation and to match the input and output impedance of the power transistor Q. The resistances R_1, R_2 and R_4 set the base bias of Q, while R_3 is sufficiently large to ensure a constant-current drive to the transistor base circuit. The transformer employs a C-core of grain-orientated silicon steel and has a small airgap to avoid magnetic saturation due to the d.c. component of the collector current.

Practical Inverter Circuit.—Fig. 2 shows the complete circuit diagram of a 100-W inverter. A power transistor Q1 associated with the transformer T1 constitutes the master oscillator, operating at 50 c/s. Apart from the specification of the transformer, to be given later, this stage calls for no further comment.

The output transistors Q2 and Q3 feed power to a centre-tapped winding on the transformer T2, each half-primary having N_1 turns. Two additional windings, each with N_2 turns, serve to provide positive feedback to the bases of Q2 and Q3, in phase with the oscillator drive from the secondaries W_4 and W_5 of the transformer T1. The magnitude of the feedback is controllable by the slider settings on the two variable resistors R_5 and R_6. If excessive regeneration is employed the master oscillator may lose control and the output stage will run as a self-

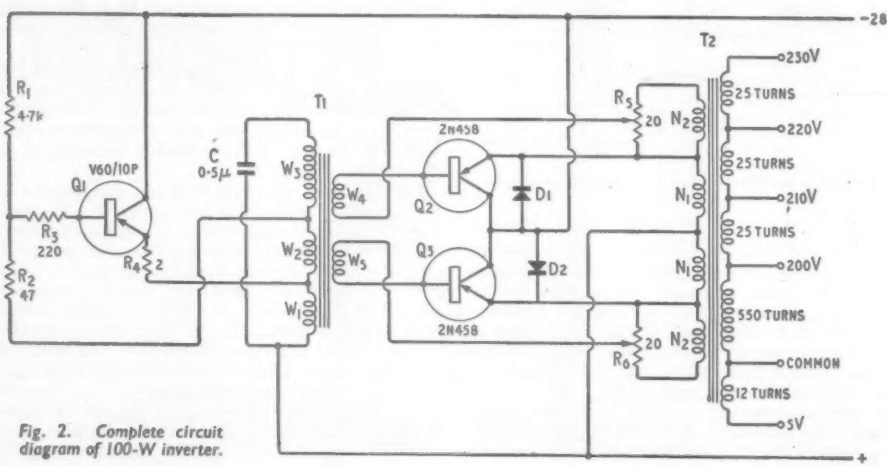

Fig. 2. Complete circuit diagram of 100-W inverter.

excited inverter. This condition must be avoided but a moderate amount of feedback makes the amplifier stage easier to drive. The two resistances also serve another useful purpose in that they can be used to equalize the drive to the output transistors if these have widely-differing characteristics. Heavy-duty wire-wound potentiometers should be chosen for this purpose. Except for R_4 the remaining resistors can be of 1-W rating and 5 per cent tolerance; R_4 should be a 5-W wire-wound component.

The diodes D1 and D2 call for comment. They must be in circuit if the inverter is used to supply a highly inductive load. Under these circumstances the output transistor load line degenerates into a distorted ellipse and there is a reverse flow of current which is in fact carried by the diodes. They are unnecessary if the load is resistive or if power-factor correction is applied. They can be of the germanium or silicon junction type, rated to carry a maximum current of 5 A and with an inverse voltage rating of 100 V.

The transformer specifications are as follows:—

OSCILLATOR TRANSFORMER T_1

Core: Double-C pattern, centre limb 1in × 1in (1 sq in cross-sectional area)
Airgap: 0.031in (1/32-in paxolin spacer)
Windings (all enamel and rayon covered):—

W_1:	160 turns,	22 s.w.g.	
W_2:	70 „	24 „	
W_3:	4330 „	34 „	
W_4:	15 „	18 „	Bifilar wound
W_5:	15 „		

OUTPUT TRANSFORMER, T2

Core: Double-C pattern, centre limb 1½in × 1½in (2.25 sq in cross-sectional area)
Airgap: None (butt joint)
Windings (all enamel covered):—

N_1: 56+56 turns,	14 s.w.g.	Bifilar wound
N_2: 8+ 8 „	16 „	

Secondary windings as shown in Fig. 2, 22 s.w.g. In both cases the heavy gauge wire is wound on first (nearest to the core).

The two transformers are bolted to a rectangular sole plate of ¼-in thick aluminium which constitutes the heat sink for all three transistors. These are in direct contact with the plate which is connected to the negative terminal of the supply battery. It may be earthed if required. The circuit wiring is straightforward and the layout of components is in no way critical.

Alternative types of transistors suitable for use in the circuit are readily available. They include the following:—

MANUFACTURER	Q1	Q2 and Q3
Ediswan-Mazda ..	XC142	XC155
	XC153	XC156
G.E.C.	GET 9	GET573
Mullard	OC28	OC28
	OC29	OC29
Newmarket	V60/10P	—
	V60/20P	—
	V60/30P	—
Texas Instruments ..	2N457	2N457
	2N458	2N458

Operation with Inductive Loads.—The dynamic characteristic of a power amplifier is almost a straight line for a purely resistive load. As previously mentioned it becomes a distorted ellipse if the load is reactive. The normal square-wave output from the inverter can under some circumstances be transformed to that shown in Fig. 3. This waveform was actually observed when the capstan drive motor of a high-grade tape recorder formed the inverter load. The motor called for a nominal input of 70 VA at 230 V and although its operation appeared to be entirely normal an attempt was made to correct the waveform by adjustment of the load power factor. It was found that a shunt capacitance of 1μF removed the effect but introduced some ringing on the leading edge of the square wave. This in turn was eliminated by connecting a resistance of 400Ω in series with the capacitor.

Power Output and Efficiency.—The inverter shown in Fig. 2 is easily capable of delivering 100 W into a resistive load. It can be switched on in the battery circuit with a 100 W lamp as the connected load and will quickly bring the lamp up to full brilliance in spite of the very low initial resistance of the cold filament. At full load the transistors remain cool and are clearly being run well below their rated maximum dissipation.

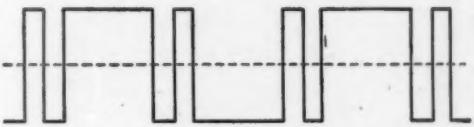

Fig. 3. Inverter output waveform with inductive load.

Measurements show that the unit draws 4.8 A from a 28 V battery when delivering 220 V, 0.46 A. An output of 101 W is thus obtained when the input is 134 W, corresponding to an efficiency of almost exactly 75 per cent. Some caution must be used when making measurements with rectifier-type a.c. meters. These in fact measure mean values but are calibrated to indicate the r.m.s. value of a sinusoidal voltage or current. They read about 10 per cent high when used to measure square waveforms.

The no-load current is 0.4 A at 28 V and the voltage regulation is about 10 per cent between one quarter load and full load output. Load changes have a negligible effect on the generated frequency, while halving the battery supply voltage changes the frequency by about 1 c/s. Finally the unit forms a suitable driver stage for a very-high-power amplifier. Using four Texas Instruments Type 2N 514B transistors in parallel push-pull an output in excess of 1 kW could easily be obtained.

Tape-Recorder Wow and Flutter.—There is no obvious reason why the performance of a recorder in respect of wow and flutter should be worse when the capstan drive motor is supplied from an inverter than when it is run from the mains. Elastic couplings, eccentric capstans and stretched tape are the usual causes of these types of distortion and are common to both cases.

Careful observations have shown that there is still another source of irregularity. This is due to

a periodic fluctuation of motor torque which appears to be a function of the number of stator slots or rotor bars. It is sufficient to cause a slight frequency modulation of any recorded tone unless the torque variations are smoothed out by a mechanical low-pass filter.

Actual measurements on a particular recorder (E.M.I. Type TR 52) give a total figure of 0.2 per cent wow and flutter from all causes when the machine is operating from the mains. The figure is exactly the same when running from the inverter provided that the battery gives a full 28 V output. When the voltage is reduced to 24 the figure rises to 0.3 per cent.

REFERENCES

1. Pye, T. R. High-Power Transistor D.C. Converters, *Electronic & Radio Engineer*, Vol. 36, March 1959, p. 96.

2. Butler, F. Transistor Inverters and Rectifier-Filter Units, *Electronic Engineering*, Vol. 31, July 1959, p. 412.

3. Wetzel, Klaus. Constant Frequency Inverter, *Radio Mentor*, Vol. 25, December 1959, p. 958 (in German).

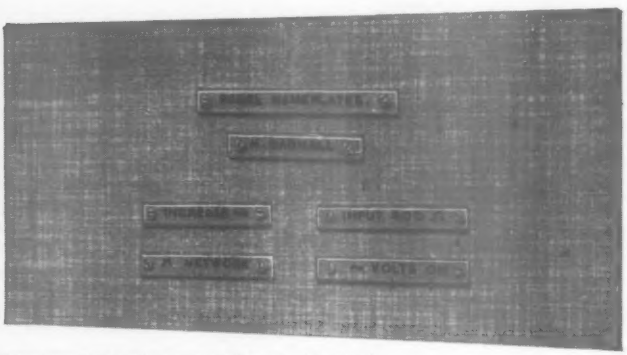

Typical nameplates as they appear on plastic-faced hardboard.

A "DO-IT-YOURSELF" METHOD

By H. DAGNALL, M.A.

PANEL NAMEPLATES

THE use of transfers does much to improve the appearance of home-built equipment and helps to give it a professional finish. But, excellent as they are for many purposes, ready-made transfers do not entirely solve the problem of panel lettering for the amateur constructor. He is soon likely to discover that the exact wording required does not exist on any of the sheets available, and he is then forced either to abandon his chosen name for that switch or socket or to make up the word from single letters. If he attempts the latter alternative, the difficulty he has in aligning them will remain for ever distressingly visible—at least in the writer's case it does. Another difficulty likely to be encountered is that transfers cannot be applied to a crackle surface, nor can they easily be curved, compressed or expanded to fit a particular requirement.

The object of this note is to describe a method by which neat panel nameplates can be made in any desired size and wording. Lettering is done with the aid of a "Uno" stencil in black Indian ink on the reverse side of a strip of Perspex. Since the letters are on the back of the strip when it is affixed to the panel they are fully protected from damage and, being in optical contact with the Perspex, they appear intensely black.

Perspex having a thickness of 1/24 in is the most suitable kind to use. It should be cut into strips ½ in wide and about 12 in long.

A jig to hold the Perspex and stencil in alignment while lettering is essential for neat work, but it need be nothing more elaborate than a board about 12 in × 4 in on which are nailed two pieces of hardboard of the same thickness as the Perspex. These should be ½ in apart so that the Perspex strip is a push fit in the gap; if the edges of the hardboard are purposely left rather rough, the strip will be gripped quite securely between them. A rail, parallel to the strip, against which the top edge of the stencil moves, completes the jig and ensures that the letters are aligned along the centre of the strip.

"Uno" stencil UC.1½ (UF.1½ for figures) and pen No. O are suitable for the smallest (¼-in) nameplates, but of course other sizes of strip and stencil can be used as required.

Writing on the Perspex is not difficult providing that it has been cleaned with carbon tetrachloride or other degreasing agent and the pen is kept clean to ensure free flow of ink. As the lettering is done on the rear surface of the Perspex the stencil must be reversed and writing done from right to left. To obviate the need for accurate centring of words on the strip, several legends are written on one strip and separated later.

The nameplates are fixed to the panel by means of countersunk 10 BA or 12 BA bolts. The heads of the bolts can afterwards be enamelled to match the panel.

On a light-coloured panel the words show up clearly but on a dark surface they should be backed with a light-coloured paper or paint; this also permits the use of colour coding for distinguishing different channels. Since the nameplates are transparent they are particularly suitable for mounting on light-coloured wood veneers or plastic-faced hardboard.

A circular dial plate can be lettered in a similar manner using a simple jig; circular plates can also be attached with 12 BA bolts to the brass bush of a knob to form a skirt.

Do not be put off because a required symbol does not appear on the stencil, for with a little ingenuity two or more characters or parts of characters can be combined to form the wanted symbol, for example parts of "O" and "L" to produce a neat capital omega symbol.

The Bootstrap Follower

ITS USE IN AUDIO AMPLIFIERS

By G. W. SHORT

THE title of this article might well have been "When Is A Cathode-Follower Not A Cathode-Follower?" However, I have a feeling that the Editor would have found that a wee bit too long. Moreover, using this as an opening gambit enables me to have the best of both worlds, since readers will have guessed that the answer to the question is "When it's a bootstrap follower," whatever that may be.

The object of the exercise is to investigate the behaviour at audio frequencies of the "cathode-follower" circuit of Fig. 1(a). This circuit is arrived at when it is desired to operate a cathode-follower with a cathode resistance much larger than is required for obtaining "cathode bias." A logical way out of the difficulty is then to use a normal-sized cathode-bias resistance in series with the desired high resistance, and to return the grid to the appropriate point, as in Fig. 1(a), so that only the voltage drop across the smaller resistance R_{k1} is operative as grid bias. In many practical circuits C_k is omitted, and the output is taken directly from the cathode.

The difference between this type of circuit and a true cathode-follower (Fig. 5(a)) is apparently trivial. It is merely a question of convenience in biasing, or so I thought for a long time. My first misgivings came when I encountered Jeffery's phase-splitter.[1] In this circuit use is made of the fact that, in the Fig. 1(a) type of circuit, the signal source "sees" not r_s, but a resistance many times greater. Thus the source delivers an increased voltage to the valve, since less is dropped across its internal resistance r_s. If r_s is large, the increase may be substantial. (In Jeffery's circuit, r_s is the anode resistance r_a of a pentode valve, and runs to several megohms.) This "impedance multiplication" effect is one which does not make itself very obvious in a true cathode-follower, where all it does is to reduce the input capacitance a little, without altering the input resistance.

It came as something of a surprise to have it pointed out years later, by "Cathode Ray,"[2] that the Fig. 1(a) circuit differs from a true cathode-follower in another important respect; it has less negative feedback. This is because the proportion of the output voltage which is fed back negatively to the grid is reduced by the source resistance r_s, because r_s and R_g act as a potential divider. The amount actually fed back; i.e., the amount developed between grid and cathode, is therefore $R_g/(R_g+r_s)$ times the actual output voltage. Thus the fraction fed back approaches unity as r_s approaches zero, and it approaches zero as the signal-source resistance becomes infinite.

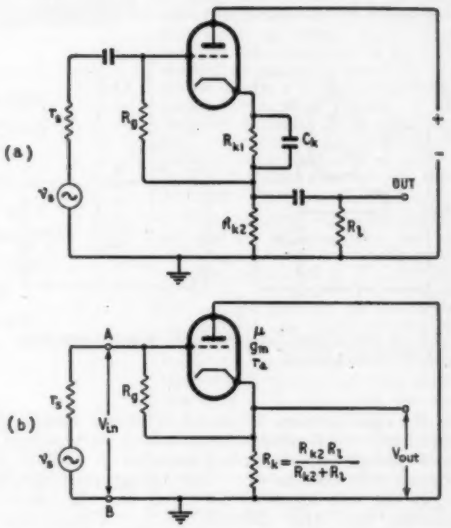

Fig. 1 (a) "Cathode-follower" circuit. (b) An a.c. equivalent circuit.

One thing which puzzled me at the time was this: if the feedback fraction is reduced, then the *gain* of the triode ought to be increased. Yet nobody seemed to have got out more voltage than he put in. Odd. But there are so many more interesting things to do than get out pen and paper and analyse circuits. Easier things, too, as far as I'm concerned. It wasn't until the circuit appeared again recently in *Wireless World*[3] that I finally got around to it, and discovered that, unlike the true cathode-follower which it so closely resembles, this circuit has an input impedance which depends on the load impedance, and an output impedance which depends on the signal-source impedance. The gain, oddly enough, is the same as that of a cathode-follower proper, though this depends on how it is defined.

For the purposes of analysis, Fig. 1(a) can be simplified to Fig. 1(b) which shows only those parts which are relevant to an a.c. signal. R_k is now the effective value of R_{k1} and the external load R_L in parallel.

Input Resistance.—This is the resistance "seen"

[1] "Push-Pull Phase-Splitter," by B. Jeffery, *Wireless World*, August 1947, p. 274.

[2] "Cathode-Followers, With Particular Reference to Grid Bias Arrangements," by "Cathode Ray," *Wireless World*, June 1955, p. 292.

[3] "Economical High-Gain A.F. Amplification," by A. R. Bailey, *Wireless World*, January 1960, p. 25.

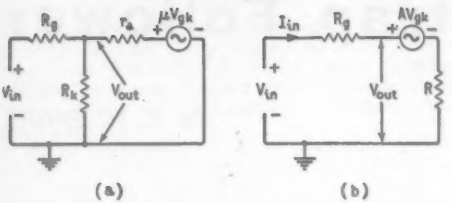

Fig. 2. Equivalent circuits of Fig. (1); (a) with normal equivalent valve circuit, (b) with valve and load combined.

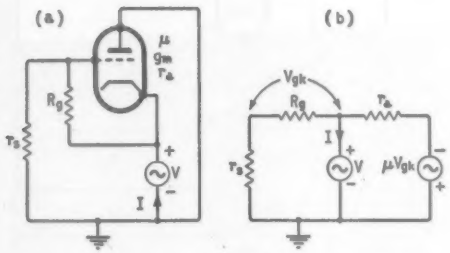

Fig. 3 (a) Circuit for calculating output impedance. (b) Equivalent circuit.

by the signal source. It is the resistance measured between points A and B with the source disconnected. If a voltage V_{in} is applied between A and B, a current will flow in R_g. The voltage drop across R_g is the true input to the valve; i.e., the voltage between grid and cathode (V_{gk}). The voltage across R_k is the output, and is AV_{gk}, where $A = \mu R_k/(r_a + R_k)$. The situation is shown in the equivalent circuit of Fig. 2(a). It is simpler, instead of analysing this circuit as it stands, to convert it into the straightforward series circuit of Fig. 2(b) by using the Thévenin equivalent for the valve and its load. This is a generator with an open-circuit output AV_{gk} and an internal resistance $R = R_k.r_a/(R_k + r_a)$. The current supplied by V_{in} is

$$I_{in} = (V_{in} - AV_{gk})/(R_g + R)$$

where $V_{gk} = I_{in}R_g$. These expressions yield $V_{in}/I_{in} = R_{in} = R + R_g(A + 1)$. The term $(A + 1)$ represents the impedance multiplication effect. The grid-cathode resistance appears to the source to be much larger than the actual physical value.

Gain.—It is clear from Fig. 1(b) that the voltage across R_k cannot exceed V_{in}. If it did, current would flow into the source instead of out of it. Thus V_{out} can approach V_{in}, but not exceed it, and the maximum possible value for the gain is 1, as in a normal cathode-follower. Here V_{in} is regarded as the input voltage. If v_s is considered to be the input voltage, then the gain is smaller and falls to zero as r_s becomes infinite.

From Fig 2(b),

$$V_{out} = AV_{gk}$$
$$= AI_{in}R_g$$
$$= AV_{in}R_g/[R + R_g(1 + A)]$$
$$V_{out}/V_{in} = AR_g/[R + R_g(1 + A)] = A'$$

In most practical circuits, R is 100kΩ or less, and $R_g(1 + A)$ is 10MΩ or more, so that $A' \approx A/(1 + A)$, which is the same as the "gain" of a cathode-follower.

Output Resistance.—This is the resistance seen by the load R_k in Fig. 1(b). To compute it we replace R_k by a generator of e.m.f. V, and let V_s be zero. The situation is then as shown in Fig. 3. Only that part of V which is developed across R_g acts as an input voltage (V_{gk}) to the valve. We have,

$$I = (V + \mu V_{gk})/r_a + V/(R_g + r_s)$$
and $(V_{gk} = VR_g/(R_g + r_s)$

The second term in the first equation merely represents a current through R_g and r_s which would flow even if the valve were not there. If we ignore it, we obtain,

$$r_{out} = \frac{V}{I} = \frac{r_a}{1 + \dfrac{\mu R_g}{R_g + r_s}}$$

When r is zero; i.e., when the amplifier is driven from a constant-voltage source, the expression for r_{out} reduces to $r_a/(1 + \mu)$, which is exactly what one would expect from a cathode-follower. But



Fig. 4. When r_s is infinite, it can be removed without altering the output impedance.

when r_s is infinite; i.e., when the amplifier is driven from a constant-current source, $r_{out} = r_a$, which is what would be seen by the load if the circuit were a straightforward amplifier with no feedback. This is what it is, under these conditions, as far as output resistance is concerned. We have made r infinite, which means that it can be removed without altering the output resistance. The circuit then becomes that of Fig. 4. Here, V is applied directly between anode and cathode, and there is no input between grid and cathode, so that the resistance seen by V is r_a.

At this point it is instructive to see what sort of values one gets in practice. Using a valve such as the ECC81 (12AT7) one might choose working conditions such that $\mu = 60$, $r_a = 17k\Omega$, $A = 34$, $R_k = 22k\Omega$, $R_g = 1M\Omega$, $r_s = 100k\Omega$. With these values, the input resistance is 35MΩ, and the output resistance is about 300Ω (compared with 275Ω for a true cathode-follower using the same valve). So for most practical purposes the circuit can be regarded as an ordinary cathode-follower. In some circumstances, it may be positively useful to increase the output impedance; for example, one might want to match a line impedance. On the other hand, there is no difficulty in raising the output resistance of a true cathode-follower: all one needs to do is to connect a suitable resistor in series with the live output terminal.

Hybrid Circuit.—The foregoing analysis shows

(*Continued on page 23*)

"Belling-Lee"

COAXIAL PLUGS AND SOCKETS*

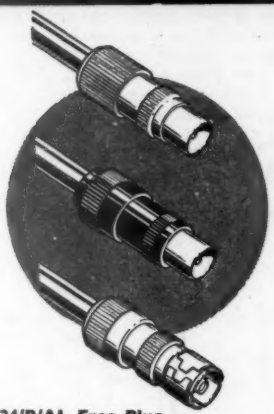

These are the connectors on which the RECMF standards and subsequently BS plugs and sockets were based

L.734/P/AL Free Plug
L.781/P2 Insulated Free Plug
L.734/J/AL Free Socket

"Belling-Lee" coaxial connectors are designed to provide the most efficient general purpose terminations possible for solid dielectric or semi-air-spaced cables between $\frac{1}{4}$" and $\frac{7}{16}$" outside diameter.

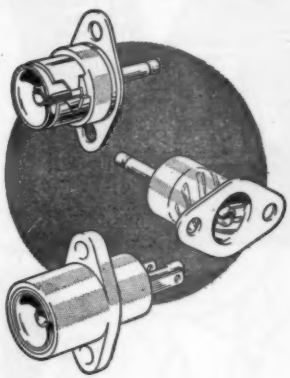

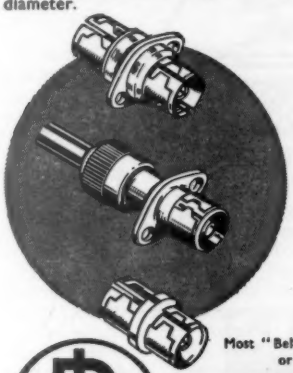

L.604/S/Cd Fixed Socket
L.734/S Fixed Socket
L.603 Insulated Fixed Socket
L.617 Bulkhead Adaptor
L.1421 Bulkhead Socket
L.616 Line Coupling

Most "Belling-Lee" products are covered by patents or registered designs or applications.

Regd.

BELLING & LEE LTD
GREAT CAMBRIDGE ROAD, ENFIELD, MIDDX., ENGLAND
Telephone: Enfield 5393 · Telegrams: Radiobel, Enfield

*PLUGS & SOCKETS · GLASS SEALS · TERMINALS
CIRCUIT PROTECTION DEVICES
INTERFERENCE FILTERS · RECEIVING AERIALS

"BELLING-LEE" NOTES

No. 24 of a Series.

Fusing, Part 8.

The normal time-current characteristic curve of a fuse-link gives no information about its performance when the current varies, as happens more often than not in practice—we are thinking of the switching surges in inductive and capacitative circuits. The only way of dealing with this is on an energy basis, for it requires the expenditure of a specific amount of energy to blow any particular fuse in a given set of circumstances. In what follows, it will simplify thinking to consider the D.C. case, for in A.C. working the current varies cyclically as well as in R.M.S. value, although the same principles apply equally well.

Now the energy expended depends on the rate of doing work and the time taken to do it. Under steady current conditions it is a function of I^2t, i.e. the square of the current (I), and the time (t). If the current varies, then the expression for the total energy expenditure must embody the summation of all the different I^2t values, expressed mathematically as $\int_0 I^2dt$, and the performance of any fuse in such circumstances can be described by a graph of $\int_0 I^2dt$ plotted against t. When the total time involved is short, so that all the energy is effective in melting the element and none is dissipated in other ways, $\int_0 I^2dt$ is constant for a particular fuse; this is another way of saying that a specific amount of energy is required to blow it. Over this period the curve runs parallel to the base line, after which it starts to climb at an increasing rate. The constant value (F) is known as the I^2t value of that fuse, and it is important inasmuch as it defines its ability to protect any circuit; the value of F for a fuse must be less than that which would damage the circuit which it has to protect.

The practical application of such curves in the selection of fuses of adequate surge handling properties is quite simple. The $\int_0 I^2dt$ performance characteristic of the circuit to be protected is plotted on the fuse graph; if the two curves meet the fuse will blow and it is unsuitable. The performance characteristic of a circuit can be calculated from the circuit constants, but this can be a tedious process, and it is often easier to take an oscillogram of the switching surge and plot this on the fuse $\int_0 I^2dt$ diagram.

Advertisement of
BELLING & LEE LTD.
Great Cambridge Road, Enfield, Middx.

particular politicians

insist on

TRADE MARK

SCOTCH

BRAND

recording tape

WORLD'S LARGEST SALES OF MAGNETIC TAPE

that the behaviour of the circuit is conditioned largely by the impedances to which its input and output terminals are connected. The impedance of the source of input voltage is usually the most important, since it governs the output impedance. When $r_s = 0$, the circuit becomes a true cathode-follower (shown in idealized form in Fig. 5(a)). This has a gain of $A/(A + 1)$ where A is the gain without feedback, in other words the gain defined as V_{out}/V_{in}. The output resistance of the valve is then low, being $r_a/(\mu + 1) \approx 1/g_m$. (In practical circuits, the output is usually shunted by something, so that the net output resistance is less than this.)

When r_s is infinite; i.e., when the triode is driven from a constant-current source, the valve presents the usual non-feedback output resistance r_a. Under these conditions the circuit becomes as shown in Fig. 5 (b); it has no feedback, and the input voltage is IR_g. This voltage is developed directly between grid and cathode, as in an ordinary triode amplifier. The difference is that the output is taken from the cathode, the anode being earthy. Now, a triode amplifier with a floating input voltage and cathode output is a bootstrap amplifier, and this is what our circuit becomes under these conditions.

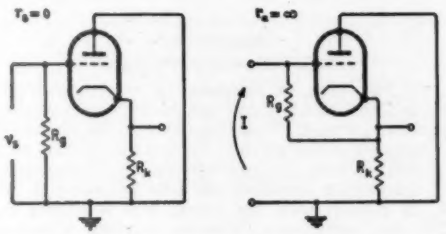

Fig. 5 (a) True cathode-follower. (b) "Bootstrap follower" with current drive. This has the same characteristics as a bootstrap amplifier with voltage drive.

Practical signal sources have neither zero nor infinite resistance, so the circuit behaves in practice like a hybrid between a cathode-follower and a bootstrap amplifier. It seems logical to call it a bootstrap follower. No originality is claimed for this title: it is so obvious that somebody must have used it before now.

In a slightly modified form (Fig. 6) this circuit forms part of the phase-splitter described in this journal by Jeffery[1]. Advantage is taken of the impedance multiplication effect to present the pentode with a high effective load, thereby increasing its gain to an appreciable fraction of the pentode μ, instead of the miserable fragment of it which is all one usually gets. The great advantage of making use of impedance multiplication is that the anode load resistor can have the usual sort of resistance and the pentode can be operated with the usual anode current (say 1mA) yet a large gain can still be obtained. Moreover, because the pentode is operating under normal conditions, as opposed to "starvation" conditions, it can deliver a large output voltage. For example, one might have an effective anode load of 3MΩ, even though the actual load resistance is only 100kΩ. With an anode current of 1mA, the voltage drop across the load is only 100V. With a high tension voltage of 250V, the remaining 150V is available for the valve, which might well deliver a peak voltage of something approaching 100V before "bottoming" begins: this is more than the triode could handle. The gain of the pentode might be 1,000 or more.

While one might get a high gain by operating the pentode under starvation conditions with a physical anode load resistance of a few megohms, it is unlikely that the gain would be as high or that the available output voltage would be as large as the values obtained using the bootstrap follower.

These facts have led to the use of a *single-ended* combination of a pentode and a bootstrap follower as a means of obtaining high overall gain from a pentode and a triode. An equivalent circuit for this combination, neglecting direct voltages, is given in Fig. 7. This is the same as Fig. 1 (b), except that r_s is now the anode resistance of the pentode (r_{ap}) and v_s is $\mu_p V$, where μ_p is the pentode μ, which may be several thousand.

The maximum gain of the combination cannot exceed the pentode amplification factor. This is much less than the maximum possible gain of the

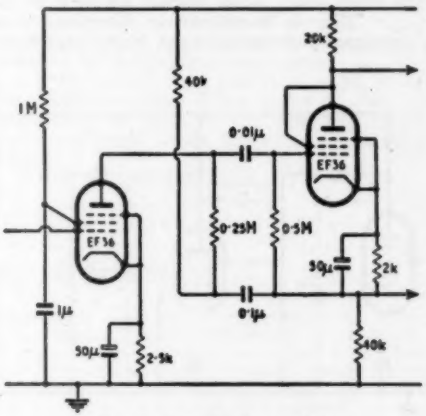

Fig. 6. Jeffery's phase splitter.

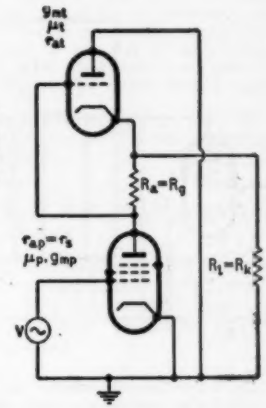

Fig. 7. Single-ended pentode—b.f. triode combination. Simplified circuit neglecting direct voltages.

two valves in cascade, which is the product of the two amplification factors. In practice, however, a cascaded circuit would have an overall gain much less than this product. All the same, the cascade amplifier might be expected to produce more gain than the bootstrap follower with pentode drive.

However, one requires gain over a band of frequencies, and to compare the two circuits on this basis it is useful to calculate the products of gain and bandwidth. This is done in the Appendix. In terms of the stray capacitances of Fig. 8, the ratio of the gain-bandwidth product of the cascade amplifier to that of the pentode-bootstrap follower combination is:

$$\frac{GB_1}{GB_2} = \left[\frac{(c_{s1}+c_{ga})(A_2+1)+c_{gk}}{c_{ga}(A_1+1)+c_{s1}+c_{gk}}\right]\left(\frac{A_1}{A_2}\right)$$

where A1 is the gain of the triode in the cascade circuit and A2 is the gain (V_{out}/V_{gk}) in the bootstrap follower circuit. In the numerator, the stray capacitance c_{s1}, which contains the output capacitance of the pentode in Fig. 8, is multiplied by (A2 + 1), but it is not multiplied by anything in the denominator. In practice, c_{s1} usually exceeds c_{ga}, so the effect of this difference can be very large.

The effect of c_{s1} in the cascade circuit is to add to c_{gk}. This is comparatively harmless, since the important capacitance is the Miller capacitance $c_{ga}(A_1+1)$. But in the bootstrap follower amplifier, cs_1 adds to c_{ga}, and the result is disastrous. In the bootstrap follower amplifier, the impedance seen by the preceding stage is the normal sort of triode input impedance, including the part due to Miller effect, multiplied by (A_2+1). The effect of adding c_{s1} to c_{ga} is the same as would be the effect of adding it in the cascade circuit, only in the cascade circuit it is not added.

Before leaving the subject of gain and bandwidth, it should be mentioned that, with the cascade circuit, one has the opportunity of putting the triode in the first stage and the pentode in the second. With some values of signal-source impedance and load capacitance this might produce a marked improvement. In the bootstrap follower combination there is no point in putting the triode in the first stage since its amplification cannot exceed about 100 even with the best high-μ valves. We shall continue to consider circuits in which the pentode is always in the first stage, partly to preserve a sound basis for comparison, and partly because the best audio pentodes are rather better than the best triodes in regard to hum. In a high-gain amplifier it would be logical to use a pentode such as the EF86 in the first stage.

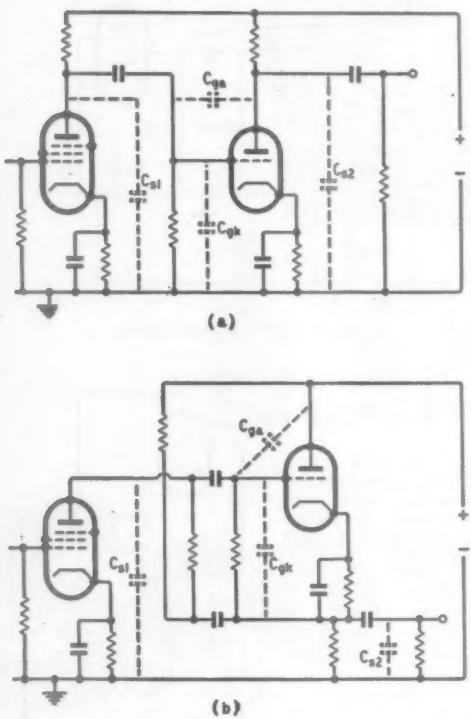

Fig. 8 (a) Cascade amplifier and (b) bootstrap follower combination showing stray capacitances

Appendix

Gain-Bandwidth Products

To find these, we calculate the pentode gain and bandwidth for each circuit and multiply their product by the triode gain. (The effect of the triode bandwidth is discussed in the article). To find the pentode gain, we need to know the load resistance and capacitance. In the cascade amplifier, the load resistance is just R_a in parallel with the triode grid resistance R_g. The load capacitance, however, contains a portion due to Miller effect. This portion is here taken to be c_{ga} (A + 1), where c_{ga} is the inter-electrode capacitance (grid-anode) of the triode, plus any stray capacitance between grid and anode. This is not strictly correct, because the Miller capacitance is not a pure capacitance. A small resistance appears in series with it, but at audio frequencies, with c_{ga} of a few pF, this resistance is negligible, and for all practical purposes the Miller capacitance is a pure capacitance. Similarly, in computing the anode load of the pentode when the triode is a bootstrap follower, a resistance which appears in series with R_g (A + 1) is neglected. (See under "Input Resistance"). Again, this is justified in practical circuits, where R_g (A + 1) is nearly always much larger.

By neglecting these unimportant resistances, we get the equivalent circuits shown in Fig. A, which have the advantage of being readily comparable. In each case, the pentode is shown by the current generator $g_m V$ and the anode resistance r_a. The circuits are simple parallel RC circuits. The pentode gain is $g_m R$, where R is the net resistance, and the bandwidth is $1/2\pi RC$, where C is the total capacitance.

R and C are different for the two circuits. If we call the values in the cascade circuit R_c and C_c, and the values in the bootstrap follower amplifier R_b and C_b, we have for the pentode in the cascade circuit, a gain-bandwidth product

$$g_m R_c \times 1/2\pi R_c C_c = g_m/2\pi C_c$$

The overall gain-bandwidth product is A_1 times this, where A_1 is the triode gain in the cascade circuit,

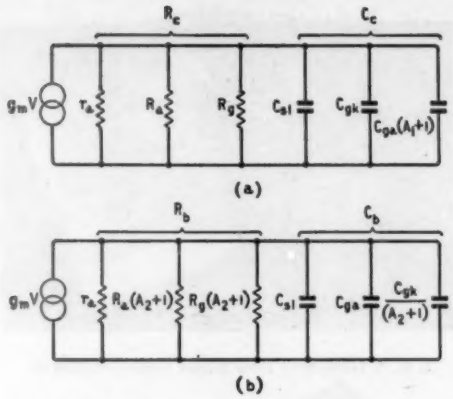

Fig. A (a) Pentode operating conditions in the cascade amplifier. (b) Pentode operating conditions in the bootstrap follower combination.

so we can put, for the cascade amplifier, $GB_1 = A_1g_m/2\pi C_c$

For the pentode in the bootstrap follower amplifier, the gain is $g_m R_b$ and the bandwidth is $1/2\pi R_bC_b$. The gain-bandwidth product for the pentode is thus $g_m/2\pi C_b$. To obtain the overall gain-bandwidth product for the bootstrap follower amplifier, this must be multiplied, not by A_2, the gain V_{out}/V_{gk} of the bootstrap follower triode, but by $A_2/(A_2 + 1)$. This is because the output of the pentode is applied between the grid of the triode and "earth," like V_{in} in Fig. 1(b). The "gain" of the triode is then $A_2/(A_2 + 1)$, as shown in the article. So the overall gain-bandwidth product for the bootstrap follower amplifier can be written

$$GB_2 = \frac{g_m}{2\pi C_b} \times \frac{A_2}{A_2 + 1} = \frac{(A_2)\,g_m}{2\pi C_b(A_2 + 1)}$$

The ratio of the gain-bandwidths is

$$\frac{GB_1}{GB_2} = \frac{A_1g_m}{2\pi C_c} \times \frac{2\pi C_c\,(A_2 + 1)}{A_2g_m} = \frac{C_bA_1(A_2 + 1)}{C_c(A_2)}$$

If $A_1 = A_2 = A$, this approximates to

$$\frac{AC_b}{C_c} = \frac{A(c_{s1} + c_{ga}) + c_{gk}}{Ac_{ga} + c_{s1} + c_{gk}}$$

In practical circuits, c_{s1} is the largest of the strays, so the cascade amplifier is much superior. However, A_1 is not likely to be the same as A_2. For greater precision, we must write the full formula,

$$\frac{GB_1}{GB_2} = \frac{A_1(A_2 + 1)\left[c_{s1} + c_{ga} + \frac{c_{gk}}{A_2+1}\right]}{A_2\,[c_{s1} + c_{gk} + c_{ga}\,(A_1 + 1)]}$$

$$= \frac{(c_{s1} + c_{ga})\,(A_2 + 1) + c_{gk}}{c_{ga}\,(A_1 + 1) + c_{s1} + c_{gk}} \times \frac{A_1}{A_2}$$

To get an idea of what this means in practice, we substitute the following typical values: $c_{s1} = 10pF$, $c_{ga} = 2pF$, $c_{gk} = 5pF$, $A_1 = 30$, $A_2 = 25$ This produces a ratio of just under 5. For equal bandwidths, the gain of the bootstrap follower, amplifier is nearly 14 dB below that of the cascade amplifier.

(To be concluded)

Electronic Pointer Generator

ALTHOUGH a conventional lecture pointer can usually be used with large-scale diagrams for illustrating television talks, there are often occasions when this is impracticable, for example, in describing surgical operations or in microscopy. To meet these and other requirements, Pye, Ltd., have developed an electronic pointer generator by means of which an arrow can be superimposed on the picture and moved to any desired point by a remote-control "joystick," which carries a push-button for switching on or off. An auxiliary switch reverses the direction of the pointer.

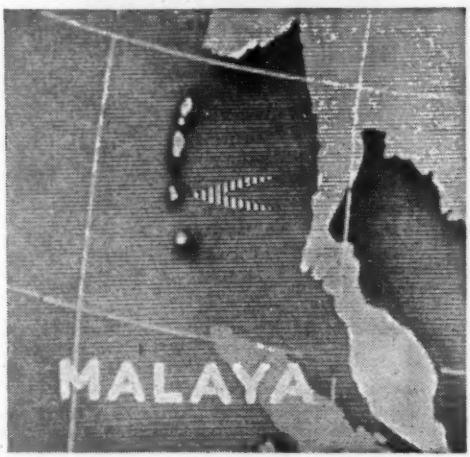

The "joystick" movement is resolved into settings of horizontal and vertical potentiometers which provide d.c. shifts for the arrow blanking pulses in the line and field periods. The arrow formation is generated by mixing sawtooth waveforms in diode coincidence circuits and can be adjusted in size. It is made more clearly visible by filling with black and white vertical striations which are generated by bursts from a triggered Hartley oscillator.

The equipment is designed to operate on 405-, 525- or 625-line systems and is available for rack mounting (Type 2443) or in portable form (Type 2444).

"Permeability Tuners for Television"—a correction

In the formula for the conditions for balance (right-hand col., p. 476 of the October 1960 issue) it is regretted that a term was omitted from the denominator of the left-hand expression. The equation should read:—

$$\frac{C_{gk}C_c}{C_cC_d + C_gC_d + C_gC_c + C_{gk}C_c + C_{gk}C_d} = \frac{C_{ak}}{C_{out} + C_{ak}}$$

RADIO HOBBIES EXHIBITION

AMATEUR TRANSMISSION, "HI-FI" AND MUSIC-MAKING ON SHOW

E. St. B. Sydenham's silver plaque winning wavemeter.

IN the competition organized by the R.S.G.B. for home-constructed apparatus a heterodyne wavemeter, made by E. St. B. Sydenham, G3LOK, was the Silver Plaque winner. R. H. Hammans' (G2IG) transistor communications receiver, covering 1 to 30Mc/s with a.m., s.s.b. and c.w. facilities, was judged the best entry from the outside-London area: this set is only 4½in by 6in by 5½in. The best club entry was from Aquila Radio Club, who submitted a six-band transistor car receiver covering 1.8 to 30Mc/s, made by C. J. Salvage, G3HRO. This receiver is split into two units, as is fairly common practice, with the output stage on the loudspeaker panel. The receiver proper has three i.f. stages, an r.f. stage, and b.f.o. for c.w. reception. The band switch on the front panel takes the form of a sliding control and this is coupled to a rotary switch at the rear of the set by a mechanical linkage.

The interest shown by R.S.G.B. members in mobile operation extends to the motor cycle—exemplified by s.s.b. equipment shown by V. Page, G3IVP—and even the humble "push-bike": R. G. Scutt's (G3IBI) 2-metre bicycle transmitter-receiver does not depend on foot power, but uses a miniature 24-V accumulator.

Another exhibit by E. St. B. Sydenham showed how members of the Royal Amateur Emergency Reserve may be alerted automatically. A super-regenerative 2-metre receiver fitted with an r.f. stage to eliminate the characteristic radiation, covers, due to its wide bandwidth, the whole 144Mc/s band. The output from this feeds, through a tuned a.f. amplifier, a pendulum relay. This relay will respond only when fed with pulses at its resonant frequency, and these pulses must be composed of a.f. to which the amplifier responds. Thus only a transmission satisfying these requirements broadcast at any frequency in the 144Mc/s band will energize the pendulum and ring the alarm bell. In the event of a mains failure, the receiver is automatically switched to battery operation.

Five companies producing equipment for the amateur were seen in the "commercial" section for the first time. Electroniques (Felixstowe) (who also produce temperature-compensated tuning coils and coil packs) were showing a complete "top-band" (160m) transmitter called the "Pathfinder." This uses germanium

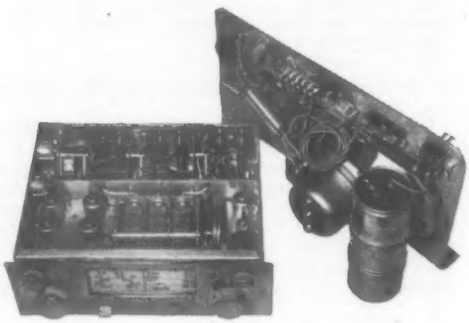

Aquila Radio Club entry—transistor mobile communications receiver made by G3HRO. Band selection is achieved by the rotary switch at the rear, operated by the slide-bar below the dial.

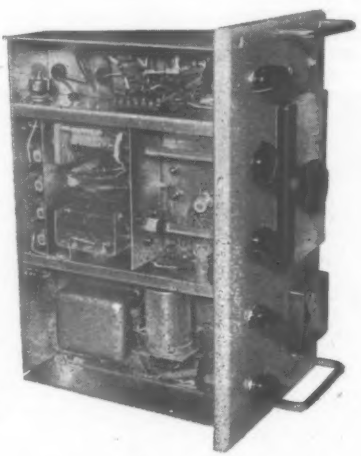

Underside of "Pathfinder" 160m transmitter by Electroniques (Felixstowe). Four-stage TV interference filter is adjustable and is seen in back compartment of centre row.

K. W. Electronics "One Sixty" top-band transmitter.

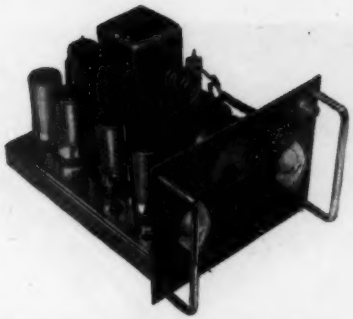

TW2 10-watt 144Mc/s transmitter by Withers.

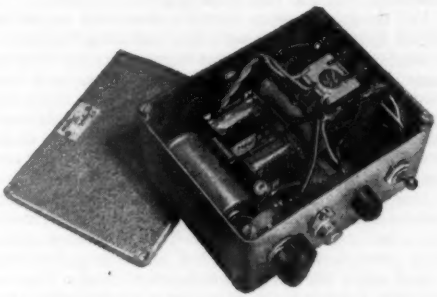

Interior of "Tiger Talking Box" transistor modulator-drive amplifier.

diodes as a speech clipper, which enables a high level of modulation to be achieved without danger of over-modulation. A four-stage low-pass output filter (to prevent television interference) is fitted in a screened compartment and the aerial current is monitored permanently by a plug-in thermocouple feeding the front-panel meter. Another new "top-band" transmitter on show was the K.W. "One-Sixty," which uses multiplication from the v.f.o. frequency of about 900kc/s. Like the "Pathfinder" this transmitter is complete in a small case, and can run at over the 10 watts input permitted. K.W. Electronics (who incidentally are importing Hammarlund receivers) won the award for commercial equipment this year, with their Viceroy s.s.b. exciter unit. Another new exhibitor was Tiger Radio, who were showing a very wide range of equipment. Items that particularly caught our eye were a 750W p.e.p. linear r.f. amplifier for 10 to 80 metres and the "Tiger Talking Box." The tetrode output stage (QY3-65) of the amplifier has its screen grid supplied from a cathode follower whose control grid is normally at chassis potential. When drive is applied a diode rectifies it providing a positive potential for the cathode-follower grid, consequently lifting the screen potential of the QY3-65 and allowing it to amplify. Complete absence of p.a. anode current (and output) is thus assured until drive is applied. Power supplies for the unit are derived by a chain of silicon rectifiers, whose good regulation is an advantage, and a bias control allows operation in any condition between Classes AB1 and C.

The "Tiger Talking Box" is a small transistor a.f. amplifier which derives its power supply from the 6.3V heater line. It is designed to be used as a microphone stand and it is capable of driving fully a pair of KT88 or 807 valves as the final stage of the modulation amplifier. The sensitivity is 10mV at an impedance of 750kΩ and the 150-V grid-to-grid output is achieved by two OC74s feeding two transformers.

Equipment made for the amateur for use in the 144Mc/s band is a comparative rarity; but this is a speciality of Withers Electronics. This company were showing for the first time a 10-watt transmitter, receiver converter and aerial, all suitable for mobile or fixed-station working. The TW2 transmitter is crystal controlled, tripling and doubling from 24Mc/s, whilst a clamp valve operates on the QQV03-10 output stage. The aerial is a $\lambda/2$ dipole, bent into a circle to reduce the directional characteristics and fed with a γ-match section which allows an 80-Ω feeder to be used although the basic aerial impedance has been changed by the "rolling up" process.

Another unusual form of aerial—called the "birdcage"—was shown by Minimitter: this is designed to act as a directional high-gain aerial for 14Mc/s. Its mode of operation can best be visualized by considering two V-dipoles, stacked, with reverse-V reflectors behind them. Little loss of performance of a dipole is incurred by bending away at right-angles to the main axis half of each of the "rods." The lower dipole and reflector have their ends "bent" upwards to meet and join, as the stacked arrays are $\lambda/4$ apart vertically, the ends of the upper array so forming the coupling between the two arrays. A gain of 10dB is claimed for the "birdcage" which, Minimitter point out, is roughly equivalent to a five-element Yagi with a boom length of nearly 60ft. The "diameter" of the birdcage aerial is under 20ft.

Sound Vision Services—the fourth of the newcomers—were showing telescopic masts embodying an ingenious principle. The lowest extending section is raised by winding up on a ratchet barrel a wire rope joined to its base and passing over a pulley at the top of the fixed section; but the upper sections have the guy-wires attached to their bases in a similar manner. Thus having made fast the guys, winding up the lowest extending section raises the upper sections. For non-telescopic rotating masts a rotating guy-ring using nylon bearing inserts which do not need greasing should eliminate the necessity for climbing the mast which always seems to be necessary during the worst blizzard of the winter.

James Scott, importers of Hallicrafters receivers, have added Dow-Key accessories to their range. Items on

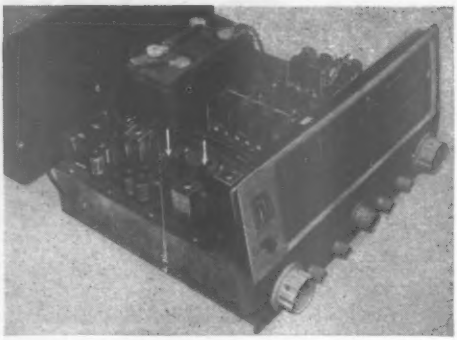

Heathkit "Mohican" transistor communications receiver using ceramic i.f. transformers (arrowed).

show included a.c.-energized coaxial relays for aerial switching and automatic TR switches which operate by allowing the transmitter output to build up a high bias on the grid of a valve connected as an amplifier in the aerial lead to the receiver. On "receive," the bias decays, allowing the valve to give a slight gain.

Judging by the R.S.G.B. exhibits, transistors have made an enormous impact on the amateur during the last two or three years, particularly for use in receivers; but this year sees the first introduction of a commercial communications receiver using them. The Heathkit "Mohican" was certainly the centre of attraction among the kits on Daystrom's stand: this set covers 550kc/s to 32Mc/s in five bands, using OC171s for r.f., mixer and local oscillator stages. The 455kc/s i.f. is amplified by three type OC45, and to achieve a bandwidth of 3kc/s piezoelectric ceramic i.f. "transformers" are used. Two of these are of ring and dot construction and approximate to double-tuned transformers, whilst two more behave as single-tuned "acceptor" circuits in the emitter leads of the second and third i.f. stages. Control of the b.f.o. is exercised by a voltage-variable capacitance diode and the whole receiver with its 400-mW output stage takes only 35mA from the 12-V battery—much less than the dial lamps, for which a separate switch is provided!

Minimitter were showing a transistor converter covering the amateur bands up to 14Mc/s. This has an i.f. of 600kc/s, to feed into an ordinary receiver and the consumption is 1mA (one) from the internal 4.5-V battery.

Not all the exhibition was devoted to amateur radio—high fidelity enthusiasts would have found something to interest them from say, Jason, Heathkit or Aveley, who were showing American Dynakit designs and new output and mains transformers using toroidal windings. For mains transformers this offers the valuable advantage that the hum field is greatly reduced.

For those who want to make their own music the British Recording Club were demonstrating "electronic music" with the aid of a tape reproducer, and showing some of the equipment used. For instance, a ring modulator can be used to produce the very thing that most of us spend time getting rid of—intermodulation—which has many musical possibilities, or another undesirable—valve noise—can be turned into a "new sound" by passing it through filters.

Finally, for those who want to make the means of making music, Jennings, our fifth newcomer, were showing a basic electric guitar kit. This consists of guitar body parts, strings, etc., and a magnetic pickup unit placed under the strings, which are of steel. Thus an output is produced when a string is plucked and, after passing through a volume and a "top-cut" control (which, as it is connected in an inductive circuit, has a greater variety of effect than is usual) mounted on the instrument this can be fed into an amplifier. Jennings claim that the output is comparatively high and, as most modern radio receivers are fairly sensitive, the gramophone amplifier section of a radio-gram or radio can be used.

NEW DATA RECORDING EQUIPMENT

UNUSUAL TAPE TRANSPORT MECHANISM

A NOVEL design of magnetic-tape transport mechanism is a feature of new digital data recording equipment manufactured by the Computer Department of Redifon Limited. This mechanism moves the tape past the recording and reading heads in small separate steps, instead of continuously as in conventional systems. The new mechanism permits controlled variations to be made independently in the speed of recording and read-out data: controlled variations can also be made in the time delay produced by the passage of data from the recording to the reading heads.

The tape (35mm wide) accommodates up to sixteen recording tracks side by side. The drive system operates in such a way that the tape is quickly started, advanced at a uniform speed during most of the step, and then quickly stopped. The interval of uniform forward motion in each step is made to coincide with a recording or read-out period.

To get the variation in tape transit time between the recording and read-out heads two sprocket drive wheels are used; one wheel is near the recording heads and the other near the read-out heads. If both sprocket wheels drive the tape at the same speed, then the length of tape between the wheels remains the same, and the time delay between the two heads is constant. If, however, the "read-out" sprocket wheel is made to move at a different speed from the "recording" sprocket wheel, then the length of tape between the two wheels alters, and the time delay between the recording and read-out heads varies accordingly. For driving the two sprocket wheels at independent speeds two separate stepping motors are used. These are energized by pulses from variable-frequency pulse generators—the recording or read-out rate varying according to the pulse repetition frequency.

A great advantage of this type of data recording system is that, since the tape velocity is fast during each step, cumbersome high-frequency carrier or flux-sensitive head recording techniques can be avoided, and simple saturation recording by d.c. pulses is effective.

RING AERIALS

By H. PAGE*, M.Sc., M.I.E.E.

INSTALLATION AT MOTALA LONG-WAVE BROADCASTING STATION

IT is unusual nowadays to read of major developments in long-wave broadcasting, and this makes the recently published description of the station under construction at Motala, Sweden[1], all the more interesting.

The station works on a wavelength of 1,571m (191kc/s), and at present the transmitter power of 150kW is radiated from a single relatively low aerial; this arrangement is similar to the B.B.C. long-wave station at Droitwich. The useful range of such a station may be limited by interference (either man-made or from stations working on nearby channels), by fading, or both. Interference can be minimized by increasing the transmitter power, and it is proposed to increase the power of Motala fourfold, i.e., to 600kW. However, this by itself would not be worth while unless at the same time the aerial is made "anti-fading," i.e., unless the upwards radiation towards the ionosphere is reduced. The usual way of achieving this on medium wavelengths is to use a mast between 0.5 and 0.6 wavelength high, but this is impracticable for long-wave broadcasting—the mast would have to be about 3,000ft high. However, substantially the same performance can be achieved by using, instead of a single tall mast radiator, a number of low aerials in the form of one or more concentric rings, and the interest of the Motala project centres round the decision to use a system of this kind.

Let us consider first a ring containing an infinite number of aerials; from considerations of symmetry we can see that two arrangements will give uniform radiation in all horizontal directions—the usual requirement for a broadcasting station. The aerials may be driven with equal co-phased currents (in-phase ring), or with the currents of the same amplitude but with the phase progressing uniformly round the ring, the total phase shift being an integral multiple of 2π radians (progressive-phase ring).

In order to achieve anti-fading characteristics the in-phase ring must be associated with a central aerial,

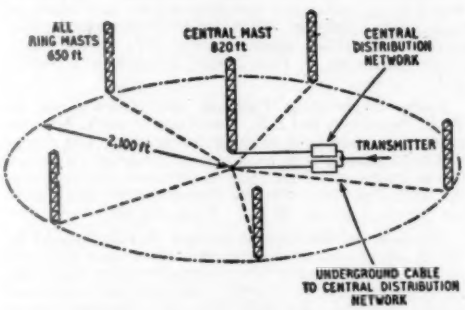

Fig. 1. Schematic diagram of the Motala ring aerial system.

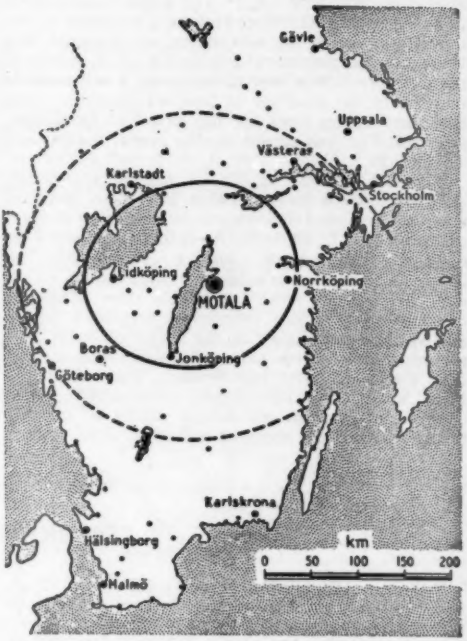

Fig. 2. Fading limits of the old (solid line) aerial system at Motala together with estimated limits of the new ring aerial. This map is reproduced from Magnusson and Stranden's article in the E.B.U. Review.

carrying a current opposite in phase to that of the ring (the central aerial can be regarded as a ring of zero radius). By changing the ratio of the current in the central aerial to that in the ring, the radiation at any specified angle to the vertical can be reduced to zero; in other words, we can achieve a vertical radiation pattern which is very like that for a single aerial of the optimum height. The progressive-phase ring does not require a central aerial, but the vertical radiation pattern is similar to that for a half-wavelength aerial, so that the anti-fading characteristics are less favourable than for the in-phase ring.

The above discussion has been in terms of a ring containing an infinite number of aerials. The effect of using a finite number is to introduce serrations in the horizontal radiation pattern, and a sufficient number of ring aerials must be used to reduce these serrations to an acceptable value. For the in-phase ring it is advantageous to use an odd number.[2]

The Motala ring aerial, shown schematically in Fig. 1, will employ a central mast 820ft high,

* B.B.C. Research Department.

and an in-phase ring comprising five masts, 650ft high, fed by underground cables from a central point. The ring radius will be 2,100ft and the earth system will occupy an area of 725 acres. For a system adjusted to give zero radiation at an angle of 45° to the vertical (i.e., having a vertical radiation pattern similar to that for a single mast 0.59 wavelength high) the current in each mast is expected to be approximately 200A and the voltage at the base to be approximately 30kV r.m.s. The initial complication of a ring aerial is therefore very high in respect of the number of masts, the area of the site required, and the equipment for energizing aerials. It is, however, the only practicable way of achieving a worth-while increase in the coverage of long wavelengths. The estimated fading limit for the new Motala station, shown in Fig. 2, is almost double that of the present installation.

The use of ring aerials to achieve anti-fading characteristics is by no means new. An in-phase ring was first used (but only experimentally) in Germany in 1931.[3] In 1939 the B.B.C. also tested an in-phase ring aerial on a wavelength of 342m at Brookman's Park; here the object was to increase the range of the Regional medium-wave service without infringing a severe Air Ministry restriction on the height of masts permitted at this station. However, when this restriction was lifted after the Second World War the B.B.C.'s aim was achieved more economically in the case of this medium wavelength station by erecting a single high mast, which is still in service.

The progressive-phase ring aerial was first proposed in 1936.[4] One was put into service in 1939 at Allouis, France, working on a wavelength of 1,648m, and designed for a power of 900kW.[5] The station was destroyed during the Second World War and the aerial system was not rebuilt in ring form.

Although much thought has been given over the past thirty years to the application of ring aerials to long- and medium-wave broadcasting, as far as the author is aware the Motala station, when completed, will be the only such system in service. Broadcasting engineers will await with interest to hear how the performance of the station compares with the expectations of the designers.

REFERENCES

[1] Magnusson, E., and Stranden, F: "Planning the New Motala Long-Wave Broadcasting Station," *E.B.U. Review*, Part A—Technical, No. 61, June, 1960, p. 107.

[2] Page, H.: "Ring-Aerial Systems — Minimum Number of Radiators Required," *Wireless Engineer* (now *Electronic Technology*), October, 1948, p. 308.

[3] Harbich, H., and Hahnemann, W.: "Vorläufiger Bericht über Versuche zur Bekämpfung der Schwunderscheinungen im Rundfunk mit Antennengebilden Üblicher Höhe (λ/4) and Grosserer Horizontalausdehnung," *Elektrotechnische Zeitschrift*, 17th December, 1931, p. 1545.

[4] Chireix, H.: "Antennes à Rayonnement zénithal réduit," *L'Onde Electrique*, July, 1936, p. 440.

[5] Adem, M.: "Le Nouveau Poste National de la Radiodiffusion Française à Allouis (Cher)," *Le Génie Civil*, 11th November, 1939.

BOOKS RECEIVED

Television Antenna Handbook by Jack Darr. Practical handbook for the service technician covering the principles, choice and installation of all types of television aerials (v.h.f. and u.h.f.). Profusely illustrated by examples of American commercial practice and including a chapter on roof techniques and safety precautions. Pp. 248; Figs. 260. Howard W. Sams & Co., Inc., 2201 East 46th Street, Indianapolis, Indiana, U.S.A. Price $3.95, U.S.A. Obtainable in U.K. through R. S. R. Hutchison, 60 Arno Vale Road, Woodthorpe, Nottingham.

Antennes voor FM, KG en TV by Ing. H. J. A. Smit and A. J. Dirksen. Practical handbook (in Dutch) of design and installation of f.m., short-wave and television aerials systems. Calculation of element length and spacing, impedance matching; mechanical problems of aerial erection, and a chapter on communal aerial systems. Pp. 191; Figs. 239. De Muiderkring N.V., Bussum, Netherlands. Price Fl. 5.90.

Electronische Muziekinstrumenten by H. Meijer Jr. and W. Heggie. Circuits in theory and practice, with descriptions (in Dutch) of the electrical and mechanical details of some representative designs. Pp. 168; Figs. 153. De Muiderkring N.V., Bussum, Netherlands. Price Fl. 7,50.

Grundzüge der Electroakustik by F. A. Fischer, Dr. Phil. Second edition, revised and enlarged, of an authoritative treatise on the theoretical foundations of electroacoustics. Provides a succinct mathematical treatment of transducers both as emitters and receivers of acoustic energy. Pp. 210; Figs. 141. Fachverlag Schiele & Schön. Markgrafenstrasse 11, Berlin, S.W. 61. Price, DM 24.

Handbuch des Rundfunk-und Fernseh-Grosshandels 1960/61. Illustrated guide with specifications and prices of current West German radio and television receivers, car radios, record players and tape recorders. Pp. 315, Verlag für Radio-Foto-Kinotechnik G.m.b.H., Berlin-Borsigwalde. Price DM 4,80.

Glossary of Terms Used in Telecommunications (including Radio) and Electronics. British Standard 204: 1960. Third revision of this standard, including the five supplements to the previous edition. Based on current usage, but with guidance in the choice of preferred terms. Covers general electrical terms, telecommunication components and circuits, radio terminal equipment, propagation and media, classification of radio waves and transmissions services, e.g., telegraphy, telephony, broadcasting, radar and navigational aids, and inductive co-ordination (design of systems to minimize interference from power supplies). Pp. 351. British Standards Institution, 2, Park Street, London, W.1. Price 35s.

Radio Engineering Formulæ and Calculations by W. E. Pannett, A.M.I.E.E. Collection of useful formulæ covering a wide field in radio transmission and reception, and dealing with problems in the every-day practice of design, installation and operation of radio stations. Pp. 200; Figs. 165. George Newnes, Ltd., Southampton Street, London, W.C.2. Price 17s 6d.

The Story of the Ionosphere by J. A. Harrison, M.A., M.Ed., Ph.D. Elementary exposition of radio propagation from Hertz to the first artificial satellite with sidelights on the development of radio technique, radar and radio-astronomy. Pp. 103; Figs. 123. Hulton Educational Publications, Ltd., 161/166, Fleet Street, London, E.C.2. Price 10s 6d.

Aspects of design

This is the thirtieth of a series of special features dealing with advanced problems in circuit design to be published by The Ediswan Mazda Applications Laboratory. We will be pleased to deal with any questions arising from this or other articles, the thirty-first of which will appear in the February 1961 issue.

30 CHOICE OF DECOUPLING COMPONENTS for TELEVISION IF STAGES

The performance of television IF stages is governed to a great extent by considerations of stability, and it is possible to design such stages with the highest gain consistent with adequate stability by careful choice of decoupling capacitors. Although the method to be described is not directly applicable to every type of IF amplifier design, the underlying principles are useful and will therefore be dealt with in some detail.

INPUT CONDUCTANCE

The input conductance of an IF amplifier stage is profoundly influenced by admittance in the cathode circuit and to a smaller extent by regeneration from g_s. For typical values found in a sound IF stage the cathode admittance produces an input conductance $G_{in} \approx -\frac{g_k B_{gk}}{B_k}$ where g_k is the cathode current mutual conductance and B_{gk} and B_k are susceptances from grid to cathode and cathode to chassis respectively. By using a sufficiently large value of cathode bypass capacitance C_k the cathode admittance might be expected to approach infinity at television IF, but in practice the inductance of the internal connection from the cathode itself to the cathode pin on the valve button cannot be bypassed, and results in degeneration, equivalent to some finite value of input conductance. All Ediswan Mazda television IF valves, including the 6F23, 6F24 and 6F25, have the cathode brought out to two separate pins on the valve button, and if these are strapped externally the unavoidable un-bypassed inductance is effectively halved, resulting in reduced degeneration.

There is, however, another way of reducing the degeneration, for whereas an inductive cathode load produces degeneration, a capacitive load produces regeneration (i.e. in the above expression G_{in} becomes negative). By reducing the value of C_k from that required to fully bypass the cathode resistor, the degeneration due to the unavoidable cathode lead inductance is opposed by the regeneration due to C_k, and for a particular value of C_k the two effects cancel, giving zero input conductance. The unwanted inductance has been "tuned out" by C_k. Further reduction in C_k provides a net regeneration; thus by varying C_k, a whole range of positive and negative input conductances can be provided. This can be seen in Fig. 1 which shows both the case of a single cathode connection (curve a) and strapped cathode connection (curve b) for the 6F24. The effect of strapping the cathode is to shift the curve along the C_k axis so that a larger value of C_k is required to give the same input conductance.

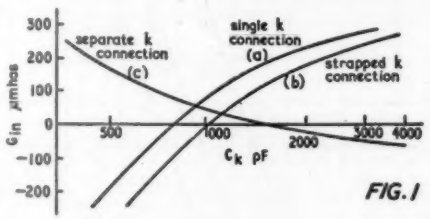

FIG. 1

The fact that some regeneration may be provided by the cathode circuit does not necessarily mean that the stage will oscillate; this will only occur if the negative input conductance due to the cathode circuit exceeds in magnitude the conductance of the external grid circuit.

From the curves (a) and (b) in Fig. 1 it can be seen that the input conductance depends rather critically upon the value of C_k. However, by using the separate cathode connection, in which the earthy end of the grid tuned circuit is decoupled to one cathode pin whilst the other cathode pin is reserved for the cathode components, the input conductance is controlled principally by feedback via g_s and this circuit has been found to provide a more gradual control of input conductance with change in the value of C_k. This is shown in curve (c) of Fig. 1.

NEUTRALISATION

An earlier article in the series "Aspects of Design" (No. 14 "Wireless World" September, 1959) described how the unwanted feedback from output to input of an IF stage may be neutralised by means of a bridge circuit. Exact neutralisation by adjusting the neutralising component to suit each receiver will enable very high gain to be achieved, but individual adjustment is not usually possible in production receivers, so that in practice a fixed neutralising component must be used and a certain mis-neutralisation accepted.

The effect of errors in neutralising can be determined directly by plotting IF gain against the value of the neutralising component. The result of varying the neutralising component (in this case a capacitor common to the anode and g_2 circuit of a 6F24 sound IF (38 Mc/s) amplifier) is shown in Fig. 2. The correct value of C_n corresponds to the minimum of each curve, and in this case is 1200pF. The separate cathode connection circuit has been used here. Increasing the value of C_k lowers the input conductance and increases the IF gain, but at the same time it makes the choice of C_n very critical.

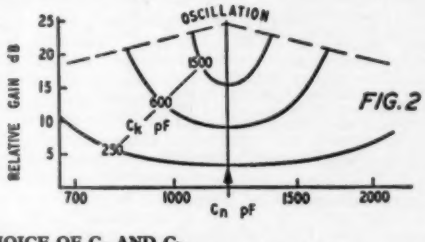

FIG. 2

CHOICE OF C_n AND C_k

It is obvious that in the choice of C_n and C_k a compromise must be made between high gain and security against instability and it is perhaps easier to choose the most suitable values if the information in Fig. 2 is redrawn in the form shown in Fig. 3, where the parameter is the error in the neutralising capacitor C_n.

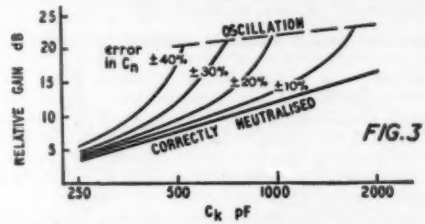

FIG. 3

It will be seen that it is advantageous to keep the error as low as possible by using ± 10% tolerance capacitors for C_n and C_k. Stable Hi-k ceramic types are now available which can be recommended for this application. An allowance must be made for the spread of valve parameters and circuit strays. These can be regarded as having the same effect on the circuit as widening the tolerance of the neutralising component C_n and cathode component C_k, and the final choice of suitable values of C_n and C_k must be made with this in mind.

For the Ediswan Mazda frame grid 6F24 used in a typical sound IF circuit, suitable values of C_n and C_k are:—

$C_n = 1200$ pF ± 10%

$C_k = 470$ pF ± 10%

These values may require adjustment to suit individual circuit design and layout.

Associated Electrical Industries Ltd
Radio and Electronic Components Division
Technical Service Department
155 Charing Cross Road, London, W.C.2
Tel: GERrard 9797. Grams: Sieswan, Westcent, London

NEW VERY HIGH SLOPE SCREENED HF PENTODE

EDISWAN MAZDA 6F24

The 6F24 has a slope of 15 mA/V at 10 mA anode current and a high "Figure of Merit," both results achieved by incorporating the new frame grid technique. This new screened HF Pentode enables improved performance to be obtained as an IF amplifier in a.c. or a.c./d.c. television receivers.

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.3

TENTATIVE RATINGS AND DATA

Maximum Design Centre Ratings

Anode Dissipation (watts)	$p_{a(max)}$	2.5*
Screen Dissipation (watts)	$p_{g2(max)}$	0.8*
Anode Voltage (volts)	$V_{a(max)}$	250
Screen Voltage (volts)	$V_{g2(max)}$	250
Heater to Cathode Voltage (volts rms)	$V_{h-k(max)rms}$	150†
Control Grid to Cathode Resistance (megohms)	$R_{g1-k(max)}$	0.6‡

*With grid to cathode resistance not exceeding 10 kΩ.
†From cathode to higher potential heater pin.
‡With $p_{a(max)} = 2$ W; $p_{g2(max)} = 0.5$ W; and assuming a common anode and screen decoupling resistance < 2.2 kΩ $\pm 10\%$.

Inter-Electrode Capacitances (pF)§

Input Capacitance	C_{in}	8.8
Output Capacitance	C_{out}	2.6
Grid 1 to Anode	C_{g1-a}	0.006
Grid 1 to Grid 3	C_{g1-g3}	0.1
Grid 1 to Grid 2	C_{g1-g2}	2.0
Grid 1 to Cathode	C_{g1-k}	6.2
Grid 2 to Anode	C_{g2-a}	0.15
Grid 3 to Anode	C_{g3-a}	0.47

§Measured in fully shielded socket, without can.

TYPICAL OPERATION

Anode Voltage (volts)	V_a	170
Screen Voltage (volts)	V_{g2}	170
Self Bias Resistance (ohms)	R_k	150
Anode Current (mA)	I_a	10
Screen Current (mA)	I_{g2}	2.7
Mutual Conductance (mA/V)	g_m	15
Inner Amplification Factor (g_1 to g_2)	μ_{g1-g2}	65
Equivalent Grid Noise Resistance (ohms)	R_{eq}	370
Input Loss at 38 Mc/s (Pins 1 and 3 strapped) (kΩ)	$r_{g1-k(w)}$	8.5
Working Input Capacity** Measured at 38 Mc/s (pF)	$C_{in(w)}$	13.7
Change in Input Capacity produced by biasing valve to cut-off. Measured at 38 Mc/s (pF)	$\Delta C_{in(w)}$	3.4
Figure of Merit†† (Valve only) (Mc/s)		375
Effective Figure of Merit (Valve and Circuit) (Mc/s)		220

**Inter-electrode capacity with holder capacity balanced out.

††Given by $\frac{g_m \times 10^3}{2\pi\sqrt{C_{in(w)}\,C_{out}}}$ see "Aspects of Design" No. 1 for further details. (Wireless World July 1958.)

Base: R9A (Noval) **Mounting Position:** Unrestricted



VIEW OF FREE END



Maximum Dimensions (mm)

Overall Length	56
Seated Height	49
Diameter	22.2

Associated Electrical Industries Ltd
Radio and Electronic Components Division
Technical Service Department
155 Charing Cross Road, London, W.C.2
Tel: GERrard 9797. Grams: Sieswan, Westcent, London

Tentative Characteristic Curves of Ediswan Mazda Valve Type 6F24

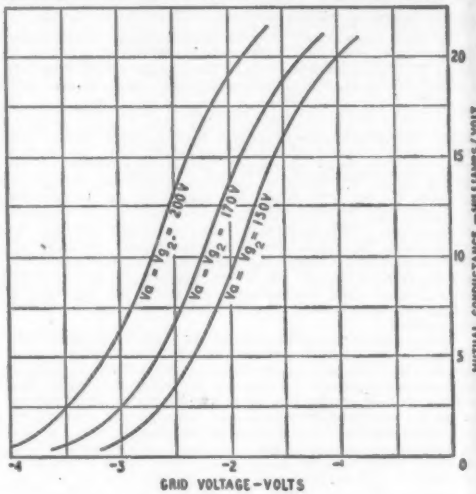

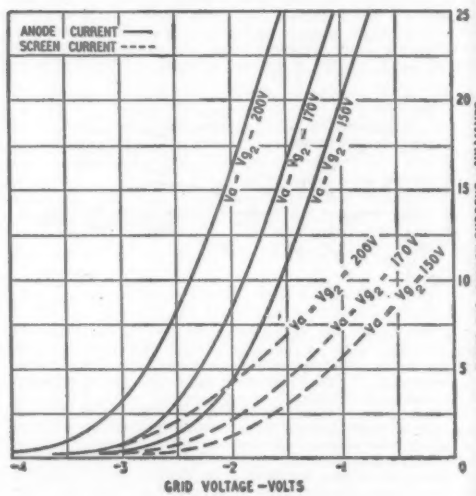

EDISWAN
MAZDA

CRC15/57

TRANSISTOR NOISE

By "CATHODE RAY"

EVERYTHING must have a beginning, and incredible though it may seem there are people for whom this will be their very first *Wireless World*. They must be warned that in order to avoid vain repetition such as the heathen use I am assuming readers' knowledge of my remarks—or their equivalent (if any)—on valve noise in the last issue, and indeed of those on *k* in the issue before that. It being unrealistic to suppose that such knowledge will return instantly and fully to the minds of even those who read the said remarks, I will recapitulate.

Quite apart from any man-made interference, all amplification is limited by random (or "white") noise caused by electricity and matter not being continuous but made of particles. That is why very weak signals are heard against a background of escaping gas, or seen on a background of animated graininess. There are two main sources of such noise. One of them is the continuous agitation of electrons in matter, caused by heat. (You may say it *is* a form of heat.) The constant that connects the electrical noise power with the absolute temperature is the *k* mentioned above, equal to 1.38×10^{-23} joules per degree. The maximum noise power of this self-generated kind that can come from any bit of circuit is

$$kTB \quad .. \quad .. \quad .. \quad (1)$$

where T is the absolute temperature (beginning at −273°C) and B is the frequency bandwidth in cycles per second. In practice this power usually yields a few microvolts, and the only source of it worth bothering about is the input circuit of the amplifier. The maximum electrical power of any kind always results when a source works into a resistance equal to its own (say R), and from that it follows that the equivalent noise e.m.f. E_N is given by

$$E_N^2 = 4RkTB \quad .. \quad .. \quad (2)$$

That is Johnson or circuit noise.

The other main kind is shot noise, caused where electrons stream from one electrode to another under the influence of an electric field, as in a valve. The individual electrons do not follow one another at exactly equal intervals of time, but randomly, and it is the resulting irregularities that constitute shot noise. The basic equation is

$$I_N^2 = 2eIB \quad .. \quad .. \quad .. \quad .. \quad (3)$$



Fig. 1 Diagram of a p-n junction, showing the movements of typical electrons. Internal arrows show directions of electrons; external arrows, positive direction of current.

where I_N is the noise current, *e* is the charge on an electron, and I is the total current.

In any valve as normally used, the anode current I is not limited by the temperature of the cathode but by the crowd of electrons hanging about just outside it (the space charge) and these have a considerable smoothing effect on the noise, reducing it to perhaps only a tenth of the amount given by the above equation. On the other hand, whenever the current divides up—say between an anode and a screen grid—a further random element is introduced which is not smoothed. This contribution, which in a pentode usually exceeds the former kind of shot noise, is called partition noise.

Now we are about ready to start on transistors. But to prevent disappointment I had better make clear that transistor theory is almost always more complicated than valve theory, and the noise aspect is no exception. In fact, until fairly recently I wouldn't have presumed to expound it at all. A paper by an (perhaps *the*) outstanding authority on the subject, van der Ziel, published in 1955,[1] had a most discouraging appearance. But, as so often mercifully happens, theory which at first looks beyond the reach of any but Nobel prize-winners is eventually found to be capable of being explained to school children. By 1958,[2] van der Ziel (with a collaborator, Becking) had been having second thoughts to such good effect that they produced what has been described as a more rigorous proof in about half the number of pages, and in spite of that condensation most of it is intelligible even to me. What follows is based on it.

The original transistors, of the point-contact variety, were excessively noisy, and their workings mysterious withal, so it is fortunate that they soon retired in favour of junction types, which are the only ones to be considered now. A feature of the treatment by van der Ziel and Becking that particularly appealed to me was the type of diagram shown here as Fig. 1, in which the various possible ways in which particles could move were considered in turn. This diagram, which applies to junction diodes, shows electrons only, and divides them into three classes. Most of the free electrons in the diode crystal are those belonging to atoms of the "donor" impurity put there to make one end of the crystal n type. These diffuse around, and of those that cross the frontier into the p-type zone some of them —the majority, if the p end if positive or forward-biased—are gone for good. They form Class 1. Others, in their aimless wanderings, find themselves back again in the n zone; they are Class 3. There are also a few electrons liberated by heat throughout the crystal, regardless of the type of impurity present. Those in the n zone need not be separately considered, because all that cross the frontier can be

[1] *Proc. I.R.E.*, Nov. 1955, p. 1639.
[2] *Proc. I.R.E.*, March 1958, p. 589.

included in Classes 1 or 3. Those in the p zone that cross over to n form Class 2.

Note that this classification is the same whatever external e.m.f. may be applied, but of course the numbers of electrons in the three classes are greatly affected thereby. The external current is denoted by I. If I_o stands for the reverse current due to Class 2 (remember, electrons being negative move oppositely to the conventional direction of current) Class 1 must add up to $I+I_o$. Class 3, unable to make up its own mind, obviously adds nothing to the external current.

The "emission" of electrons in Classes 1 and 2 from their zones, and their journeys to the opposite zones, are analogous to the crossing of electrons from cathode to anode in a thermionic diode—except for the absence of space charge, which is one respect at least in which semiconductor electronics is simpler than valves. (The electron charges are neutralized by the equal positive charges of their parent atoms.) So the shot-effect formula in its simpler form without space-charge smoothing (eq. 3) applies:

$$i_1^2 = 2e(I+I_o)B \quad \ldots\ldots\ldots\ldots \quad (4)$$

$$\text{and } i_2^2 = 2eI_oB \quad \ldots\ldots\ldots \quad (5)$$

where i_1 and i_2 are the r.m.s. noise currents due to all the electrons in Classes 1 and 2 respectively. These formulae are for current-squared, partly because they are simpler that way, and partly because random noise powers (proportional to current-squared or voltage-squared) can be added together simply, whereas currents and voltages can't—if one wants a correct answer.

The movements of Class 3 are random, due entirely to thermal agitation, and so their contribution to noise is given by an adaptation of eq. 2. That was in terms of voltage, but "Ohm's law" enables us to adapt it:

$$i_3^2 = \frac{E_N^2}{R^2} = \frac{4kTB}{R} = 4kTGB$$

where G is the appropriate conductance. The question of what is appropriate here is a little tricky. It turns out that G is equal to $G_a - e(I+I_o)/kT$, where G_a is the conductance of the junction to a.c. So

$$i_3^2 = 4kT\left(G_a - \frac{e(I+I_o)}{kT}\right)B \quad \ldots\ldots \quad (6)$$

The total noise-current-squared (say i^2) is $i_1^2+i_2^2+i_3^2$ and substituting their values from (4), (5) and (6) we get

$$i^2 = i_1^2+i_2^2+i_3^2 = 2e(I+I_o)B+2eI_oB+4kTG_aB-4e(I+I_o)B = 4kTG_aB-2eIB \quad \ldots\ldots\ldots \quad (7)$$

I_o very conveniently disappears, leaving us with i^2 in terms of the external current I.

This calculation may seem a bit dodgy in places, but it is confirmed by practical measurements, which is a comfort.

So far our currents have been composed exclusively of electrons. In an actual junction diode each class of electrons has its counterpart in a class of holes moving in the opposite direction. The current I includes both, and I don't think it would have occurred to me to doubt that the noise currents are in the same proportion therein as they are in the electron currents just calculated. But just to make sure, van der Ziel gives formal proofs that what holds for holes alone does also for electrons alone and for both combined.

Skipping that, we pass on to transistor triodes. Unlike a triode valve, a transistor consists of a pair of diodes back to back. So it can be tackled as an extension of what we have just done. Fig. 2(a) shows how the electrons move in a p-n-p transistor. The first three classes correspond to those in Fig. 1, with the base as the n zone and the emitter as the p. One might expect the same three to be duplicated in the base-collector junction. But, unlike the base-emitter junction, under working conditions it is always biased in the "reverse" direction, preventing electrons from flowing towards the collector. So Classes 1 and 3 are absent.

Fig. 2(b) shows hole movement. The first four classes are the same as for electrons in reverse, but there is one extra class which is in fact the most important of all, comprising the holes that pass right through and on into the external circuit.

If equation (1) is true for diodes in general it should be true of the two transistor diodes in particular. Let us apply it first to the emitter diode, in which the current and conductance can be called I_e and G_e respectively to distinguish them, and of course i_e is the corresponding noise current. Substituting these in (7) we get

$$i_e^2 = 4kTG_eB-2eI_eB \quad \ldots\ldots\ldots \quad (8)$$

The formula for the collector diode is the same except for c instead of e, but we can save ourselves the trouble of writing the first term, because we have already decided that the collector diode is reverse-biased and so its conductance is negligible. And because I_c in this case flows from n to p instead of p to n (which we have taken as the positive direction without actually saying so) it is negative. So

$$i_c^2 = 2eI_cB \quad \ldots\ldots\ldots\ldots \quad (9)$$

The noise current i_c can be regarded as coming from a current generator in parallel with the input junction of a noise-free transistor, and i_c as coming in parallel with the output junction. But that is not quite all.

In Fig. 3, I_1 and I_2 are currents from two a.c.

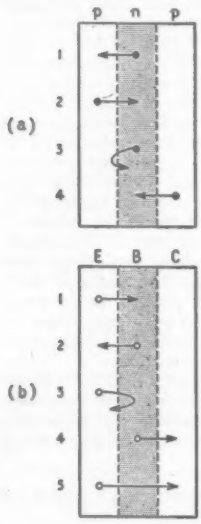

(Left): Fig. 2 A transistor consists of two diodes back-to-back, and here are shown the typical movements of (a) electrons and (b) holes.



(Below): Fig. 3 Given I_1 and I_2, what is the total, I?

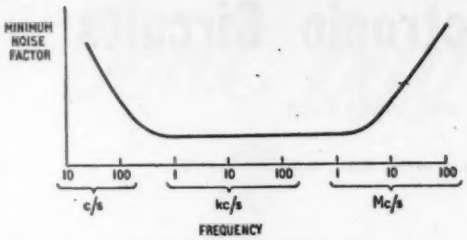

Fig. 4 Typical noise/frequency characteristic for a transistor.

generators working simultaneously. How much is the total current, I? The answer is that it depends on whether the two generators are synchronous or not. If not, then the rule we have been following is correct: $I^2=I_1^2+I_2^2$. But if they have the same frequency, then $I^2=(I_1+I_2)^2$. For example, if I_1 happened to be equal to $-I_2$, I would clearly be 0. But if they were unequal in frequency, or random, then it wouldn't even be possible to say $I_1=-I_2$, because there couldn't be a constant 180° phase difference between them.

The second method of addition applies even when the currents have no definite frequency—as with noise currents—so long as they are synchronous. This is so with the straight-through current of Class 5, but as that is not the whole current the total result is somewhere between the two extremes. In technical language, the noise currents i_e and i_c are *partially correlated*. Note that the difference between $i_e^2+i_c^2$ and $(i_e+i_c)^2$ is $2i_ei_c$. We might think that even a partially correlated current would therefore be larger than a totally uncorrelated one, but in this case the correlated parts of i_e and i_c have opposite signs, so the total noise is reduced by the correlation. Because i_b is the main current, correlation is nearly complete, at least at low frequencies.

To calculate the total noise, one has to fit the noise generators given by eqs. 8 and 9 into a transistor equivalent circuit, and, since one is very much interested in how it depends on frequency, this equivalent circuit should include capacitors and anything else that may be necessary to simulate high-frequency effects in the transistor. The calculations then become no easy task. They have been performed—and, what's more, checked with measurements on actual transistors—by J. M. Stewart.[3] The badness of noise is best expressed as noise factor or figure, which is a measure of the extent to which it affects weak signals and so limits effective amplification. Stewart used a common-base circuit for his analysis, but found that the noise factor was essentially the same for the other two configurations. He circumvented another complication—that the noise factor depends on the external impedances connected to the transistor—by assuming that they would be adjusted to give the lowest and therefore best noise factor.

An interesting point is that the forking of emitter current into collector current and base current causes partition noise, analogous to that in multi-electrode valves; but because the base current is usually a very small fraction of emitter current the effect is relatively small.

[3] *Proc. I.E.E.*, Part B Supplement No. 17, May 1959, p. 1056.

A more serious thing is that there is also Johnson noise due to the resistances of the various parts. The most important is that due to what is usually denoted by $r_{bb'}$—the resistance between the base terminal and the active part of the base.

Such calculations reveal a frequency characteristic in which noise is flat or "white" over a wide middle range, but slopes upward at each end somewhat as in Fig. 4. Why?

At the low-frequency end the additional noise is more or less inversely proportional to frequency, so it is often called $1/f$ noise. Like the rather similar "flicker" noise in valves, it seems to lack a comprehensive explanation, but for our purpose it may be sufficient to note that it has been traced to surface leakage and similar imperfections of manufacture. While at one time it seriously affected the a.f. band, it has been pushed progressively down towards the sub-audio frequencies. Even those strange types who work among such things as servo-mechanisms and bio-electricity, to whom 20 c/s is an ultra-high frequency, are helped by this, because the lower the frequency at which the $1/f$ noise starts the less there is of it at any given frequency.

At the other end the rise is due chiefly to the various effects that cause transistor performance in general to fall off. Even "white" noise sources, if inserted in networks that include capacitors, give a net output that varies with frequency, Correlation becomes less, for one thing. It must be remembered that noise factor is worsened by anything that reduces signals more than noise. Against this gloomy thought there is the information that over the valuable middle frequencies the noise factor for junction transistors can be lower even than that for valves. But don't assume that this is necessarily so with the transistors you buy!

Brit.I.R.E. Premiums

THE first recipients of the newly established Associated-Rediffusion premium of the British Institution of Radio Engineers are K. G. Freeman (Mullard) and D. C. Brothers (B.B.C.) who share the £50 prize. Their papers "A Gating Circuit for Single-gun Colour Television Tubes" (Freeman) and "The Testing and Operation of 4½-in Image Orthicon Tubes" (Brothers) were read at the Institution's 1959 Convention.

The Heinrich Hertz premium (20 gn.) goes to P. B. Helsdon (Marconi's) for his Convention paper "Transistors in Video Equipment." K. Burrows, of Imperial College, receives the new A. F. Bulgin premium (15 gn.) for his paper "A Rocket Borne Magnetometer."

Four co-authors who are with the National Research Council of Canada receive the Brabazon award (15 gn.) for "A Low-drain Distress Beacon for a Crash Position Indicator." T. C. R. S. Fowler, of Bristol Aircraft, is awarded the Leslie McMichael premium (10 gn.) for "A Six-channel High-Frequency Telemetry System."

The new Charles Babbage award for an outstanding paper on electronic aspects of computers (15 gn.) is shared by Dr. T. B. Tomlinson (Southern Instruments) whose paper was "Switching Circuits Using Bi-directional Non-linear Impedances" and Dr. M. Prutton (I.C.T.) for "Ferro-electrics and Computer Storage."

I. J. P. James' paper "A Vidicon Camera for Industrial Colour Television" has been awarded the 10 gn. Marconi award. He is with E.M.I.

All three recipients of the graduateship examination prizes are from overseas—C. S. Sujan (India), O. Smikt (Israel) and W. W. Cridland (Canada).

Elements of Electronic Circuits

21.–Differentiation and Integration

By J. M. PETERS, B.Sc. (Eng.), A.M.I.E.E., A.M.Brit.I.R.E.

EARLY sections in this series have illustrated how a simple series C-R combination can "differentiate" or "integrate" a rectangular input waveform with an accuracy depending on the relation between time constant employed and the length of the waveform. These circuits, with the aid of feedback amplifier, can be used to produce waveforms approximately proportional to the derivative or the integral of the input waveform. If certain precautions are taken it is possible for high accuracies to be achieved.

Most of the commonly-used methods are based on the fact that

$$v_c = \int i_c \, dt \quad \text{or} \quad i_c = dv_c/dt$$

where v_c is the voltage developed across the capacitor and i_c is the current taken by it.

L-R differentiating networks may also be encountered but the resistance of the inductor introduces errors. However, in some applications these errors can be tolerated.

Figs. 1 (a) and (b) illustrate an improvement on the simple C-R circuit for differentiating and integrating respectively. It can be shown mathematically that if the gain of the amplifier without feedback (A) is constant; then the time constant of the differentiating circuit of Fig. 1(a) is effectively divided by (A+1). This is accomplished without the corresponding decrease in amplitude of the output (which would have occurred in the ordinary way with the simple C-R circuit). The gain of the amplifier compensates for this and an improvement in accuracy of waveforms due to the decreased time constant results. A similar treatment for the integrating circuit of Fig. 1 (b) leads to the result that the use of the feedback amplifier effectively multiplies the time constant by the factor (A+1), resulting again in a more accurate integrated waveform.

To compensate for stray capacitances which introduce time delays in the feedback loops of differentiators, and leakage resistance and dielectric absorption in the integrating capacitor of integrators, it is usual to introduce compensating circuits. Fig. 2 shows an integrating circuit of the Miller type (see description of the Miller time base in No. 14, June 1960) followed by a compensating amplifier. The object of this amplifier is to provide a current which is always equal and opposite to the leakage current through the integrating capacitor and the variable resistor is set so that balance of charge and discharge is achieved. One of the aims in both feedback differentiating and integrating circuits is to keep the voltage variations at the first grid to a minimum. The closer one can get to this ideal the nearer will the output be to either the derivative or the integral of the input. A high loop gain is essential and several stages of amplification are often used to achieve this.

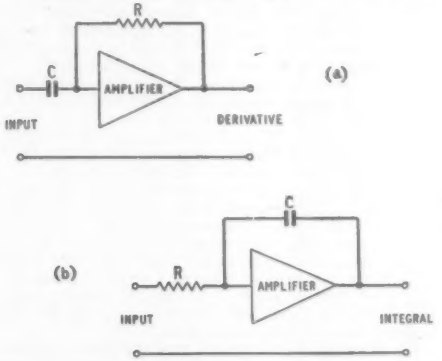

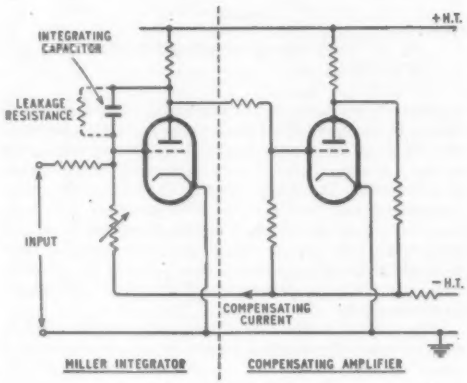

Fig. 2



Fig. 3

Mention must be made of current, as opposed to voltage, feedback for differentiation or integration. Referring to Fig. 3, it will be seen that this circuit acts as a differentiator.

$$v_K \propto \int i_K = i_a$$

and due to feedback $v_K = v_{in}$. The anode current therefore varies as the derivative of the input voltage.

Before leaving this section it should be noted that a number of mechanical and electro-mechanical devices are available for carrying out these operations, but their response time is much longer than that of the circuits considered here.

Don't buy a HIGH-SPEED OSCILLOSCOPE

until you've seen the

Airmec

TYPE 294

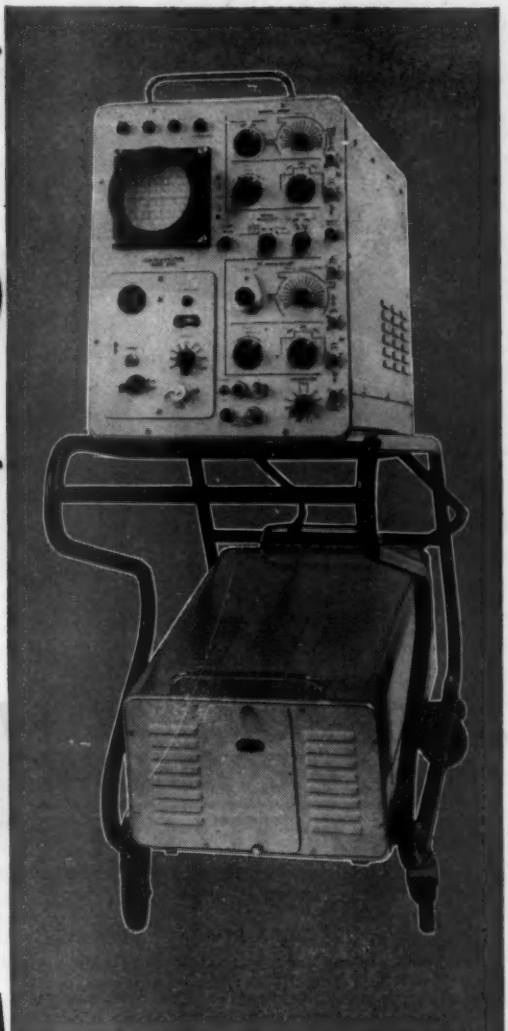

Just at . . .

the 5th AIRMEC EXHIBITION

together with a complete range of ELECTRONIC EQUIPMENT

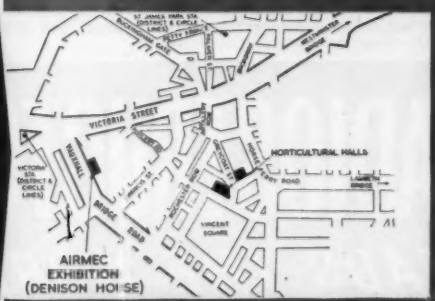

Admission by ticket only

on January 16th - 20th

MONDAY - THURSDAY 10 A.M. - 7 P.M.

FRIDAY 10 A.M. - 5 P.M.

Please write or telephone for tickets to

AIRMEC LIMITED

HIGH WYCOMBE, BUCKS.

Tel: HIGH WYCOMBE 2501/7

FREE THIS BOOK WILL INTEREST YOU!

LEARNING the PRACTICAL WAY

Some of the actual equipment supplied with our courses.

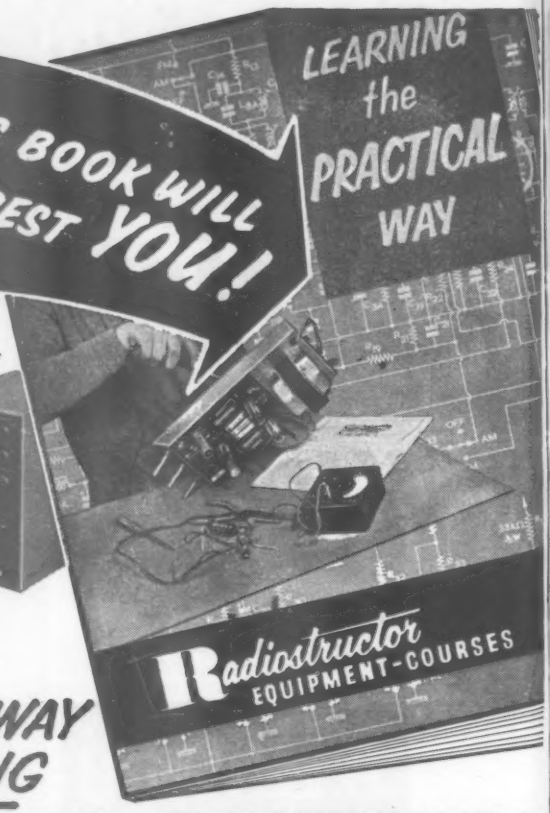

A NEW-PRACTICAL WAY of UNDERSTANDING

RADIO · TELEVISION · ELECTRONICS

Including: Transistors; VHF/FM; Hi-Fi equipment; Computers; Servo-mechs; Test Instruments, Photo-electrics; Nucleonics; etc.

FOR . . . Your Career . . . Your Own Business . . . An Absorbing Hobby . . .

Radiostructor—an organisation *specialising* in electronic training systems—offers a new self-instructional method using specially designed equipment on a "do-it-yourself" basis. You learn by building actual equipment with the big kits of components which we send you. You advance by simple steps, performing a whole series of interesting and instructive experiments—with no complicated mathematics! Instructional manuals employ the latest techniques for showing the full story of electronics in a practical and interesting way—in fact, you really have fun whilst learning!

Fill in the coupon below, for full particulars:—

RADIOSTRUCTOR

LEADS THE WORLD

IN ELECTRONICS TRAINING

POST NOW

To RADIOSTRUCTOR (Dept. G66), READING, BERKS.

Please send brochure, without obligation, to:—

* Name .....

Address .....

.....

*** BLOCK CAPITALS PLEASE**

(We do not employ representatives) 31/12/60

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents

Stereo Broadcasts

I HAVE listened with interest and enjoyment to the B.B.C.'s series of experimental stereo broadcasts.

Presumably the original intention of these tests was to assess the relative merits of stereo and mono reproduction. This task has recently been made more difficult by the use of a TV sound a.m. transmitter for the right-hand channel. This inevitably produces a marked difference in the signal-to-noise ratio of the two channels. Similar performance from each channel can only be provided by using two similar transmitters or, preferably, one transmitter using a multiplex system.

In the meantime the case for stereo has been amply demonstrated by the gramophone record industry. After a somewhat shaky start they are issuing and selling vast numbers of stereo discs to a public which is obviously no longer in any doubt.

Now that the burden of proof has been lifted from the B.B.C., surely they could demonstrate a single-transmitter method of stereo broadcasting. The Mullard system (with its crosstalk 45dB down) seems to have much to recommend it, including the facility of radiating two separate programmes from a single transmitter.

Now seems the ideal time to start regular stereo transmissions from a single transmitter in each B.B.C. region. If this is not possible surely we could have an initial pilot scheme operating from Wrotham only, as was done during the f.m./a.m. controversy.

Saffron Walden, Essex. M. S. GOTCH.

Television Standards

MR. BANTHORPE (Oct. 1960 issue) advocates a change of field frequency from 50 c/s to 60 c/s for the purpose of reducing flicker. The price to be paid would include an increase of bandwidth and a loss of the mains-hold feature as already mentioned by Mr. Banthorpe. But American experience shows that telecine and telerecording process become more involved and give inferior performances under those conditions. Once a field frequency has been reached which is sufficiently high to enable rapid movements to be depicted satisfactorily, then it would appear logical to achieve freedom from flicker by selection of afterglow time.

Mr. Heffernan, in the same issue, claims that "a real advantage . . . is gained in getting one's peak aerial power in the blacks and the all-important synchronizing pulses." Has Mr. Heffernan forgotten that an unmodulated carrier contains no intelligence and that a voltage change from 0-3 produces just the same signal as a change from 7-10?

Mr. Charles Rogers (Nov. 1960 issue) writes of the bandwidth needed for equal horizontal and vertical definition. Concentrating first on the word "needed," is this not putting the cart before the horse? A *suitable* number of lines is incidental to the bandwidth *available*. It is the bandwidth which is the raw material and which costs money, lines do not. There is no single correct relationship, and discussion* has shown that the country's experts disagree strongly amongst themselves as to what is the *best* relationship, their opinions covering wide ranges.

As for equal horizontal and vertical definitions, I suggest that there is no such condition. If there are l lines in a picture, then the number of different vertical heights which images may have is l. But images may be shown with an infinite variety of horizontal lengths. In the vertical plane an image may take up one of l positions. In the horizontal plane it may take up one of an infinite number of positions.

It has been known for at least a decade that the conventional relationship, usually expressed in cart-before-horse fashion as

$$f_{max} = A l^2 f_p / 2$$

gives, when transposed, a number of lines which is too small. The Television Advisory Committee's recommendation for increasing vertical definition to a greater extent than horizontal definition merely recognizes this fact.

I believe that the *logical* approach to this problem is to determine the *available* bandwidth, and with a multi-standard camera channel, limited to this bandwidth, to select that number of lines which gives the most pleasing results. This, of course, has been done, but it is surprising how old ideas stick. This is probably because the subject makes a neat (but very misleading) examination question.

I believe that the fallacy of the conventional equation can be demonstrated in the following manner:—

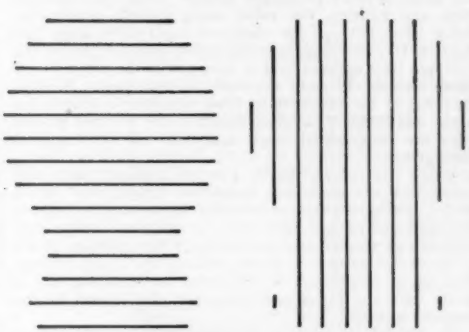

I reason that if this equation were valid, then the definition of an image would be governed by the sum total of the line lengths that lay within the boundaries of the image of an object, irrespective of whether they coincided with the major or the minor axis of an elongated image. The above sketches are of the *same* object drawn in these two different ways.

Sutton, Surrey. R. C. WHITEHEAD.

Transistorized Wein Bridge Oscillator

THE use of the super-alpha pair as the input stage in the article in your August 1960 issue has already provoked considerable comment, but one feature of the arrangement has been misrepresented by Mr. F. Butler and overlooked by subsequent correspondents. On page 388 he says that the super-alpha stage is an emitter follower directly coupled to a common-emitter stage, the collector of the emitter follower being taken to the collector of the common

(* See, for example, "Relation Between Picture Size, Viewing Distance and Picture Quality," L. C. Jesty, *Proc.I.E.E.*, Part B, No. 23, Vol. 105, Sept. 1958.)

emitter stage and not the supply rail. He then says: "The principal effect of this change is to place in series with the collector circuit of the first transistor the whole output voltage developed across the load resistance. This voltage is opposite in phase to the amplifier input voltage and constitutes a large series negative feedback signal. The effect of this [feedback] is to cause a further increase in the already high input resistance . . ." Surely the effect of this feedback is to reduce the input

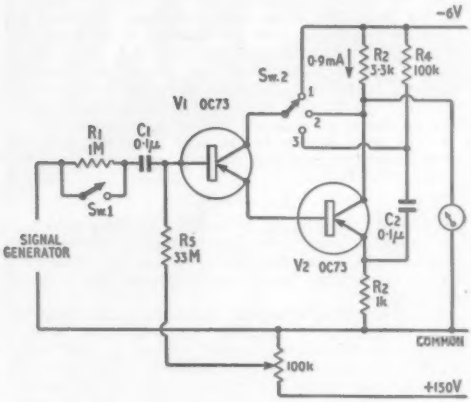

resistance, for, when the collector voltage of an emitter follower is reduced, an increase in the input current is required to maintain the emitter current constant. Thus the stage appears to have a resistor connected between base and emitter, the value using hybrid parameters, being $(B + 1)/h'_{22}$. By using the super-alpha stage this resistor is connected between input and output of the pair and thus appears as if it were across the input $k + 1$ times smaller, k being the stage voltage gain. At high frequencies the collector to base capacitance shunts the input still further, an effect which is $k + 1$ times greater with the super-alpha stage than with the conventional arrangement.

Using the circuit shown a set of measurements was made with the same two transistors throughout. With Sw2 in position 1 the circuit is that of an emitter follower driving a common-emitter stage, in position 2 the super-alpha stage results, and in position 3 the collector of V1 is connected so that it closely follows the input voltage. The input impedance is measured by inserting R_1 in series with the input and observing the change in the output voltage.

At 100 c/s the change of Sw2 from position 3 to position 2 reduces the input impedance from 1.6 to 1.3MΩ. This gives $(B + 1)/h'_{22}$ as 30MΩ (very approx.) and hence if $B = 30$ (and experiments show that B is maintained at very low currents) $1/h'_{22} = 1M\Omega$, which is much higher than the value at normal currents.

At 3 kc/s changing from position 3 to position 1 reduces the input impedance from 1.4 to 0.8MΩ. This gives the collector to base capacity of V1 as 5½pF.

At 3 kc/s changing from position 3 to position 2 reduces the input impedance from 1.4 to 0.17 megohms. This gives the collector to base capacity as 7½pF, i.e. larger at the lower collector voltage, which seems reasonable though both values of the capacitance are smaller than the value at normal currents.

A table setting out the input impedance of the three circuits at various frequencies is shown below

	Frequency (kc/s)	0.1	1.0	3.0	10	30	Sw 2
Input impedance in megohms	Conventional circuit	1.6	1.4	0.8	0.19	0.05	1
	Super-alpha	1.3	0.6	0.17	0.045	0.02	2
	Collector "lifted"	1.6	1.6	1.4	0.5	0.07	3

The technique of lifting the collector of an emitter follower is used in Application Report No. 6 of Texas Instruments. Here a d.c. amplifier is described with an input impedance of 200MΩ.

Barnet, Herts. J. C. A. TALBOT

The author replies:—

Mr. Talbot has drawn attention to what in some circumstances may be a fundamental defect of the super-alpha transistor pair. I accept his conclusion that the effect of feedback from the collector load is to reduce the input impedance of the first stage and not to increase it as I stated. Nevertheless, from Mr. Talbot's tabulated figures it is clear that at low frequencies the input impedances of the three circuit arrangements he describes are all of the same order of magnitude but that, partly because of collector-base capacitance, the input impedance of the super-alpha circuit falls off more rapidly with an increase in frequency than is the case with the other two circuits. It turns out, quite fortuitously, that this characteristic is acceptable in the present case because, on any given frequency range, the Wien bridge network has its lowest impedance at the highest frequency. Thus we have in effect an amplifier of variable input impedance driven from a source of variable output impedance and any mis-match is of little practical consequence. Naturally the effect of collector capacitance is much worse in the case of audio-frequency transistors than it is for h.f. or v.h.f. transistors in which this capacitance is very small. If outputs extending up to 100 or 200 kc/s are desired it would be advisable to use transistors with alpha cut-off frequencies in the range 30-100Mc/s.

I have a copy of the excellent Texas Instruments Application Report referred to by Mr. Talbot, but it was issued after my paper was written. It is possible that their techniques for designing transistor circuits of very high input impedance might have applications in the R-C oscillator field but, if carried to extremes, these techniques become too elaborate to incorporate in a simple piece of apparatus.

F. BUTLER.

P.V.C. holders have been produced by Bush Radio to protect the miniature circuit diagrams which they now issue to dealers for the servicing of television and sound receivers.

MANUFACTURERS' PRODUCTS

NEW ELECTRONIC EQUIPMENT AND ACCESSORIES

Automatic Circuit Tester

THE American Lavoie Laboratories' "Robotester" can test to any one of four alternative tolerance limits the resistance and a.c. or d.c. voltage between any two of up to 250 test points at a rate of about 80 tests per minute.



Lavoie Laboratories "Robo·ester" automatic circuit tester.

The tolerance limit as well as the resistance or voltage to be tested are individually set for each test by means of a punched tape which is fed into the Robotester. If a fault is found the machine automatically stops until switched on again, and at the same time the measurement accuracy can be checked. Alternatively, an additional unit can be attached which automatically records the fault and then restarts the tester. It is claimed that with this instrument on production runs final test times can be shortened by about 80%. The Lavoie Laboratories' Robotester costs £2,850 and is distributed in this country by Metrix Instruments Ltd., of 54 Victoria Road, Surbiton, Surrey.

Versatile Multi-pin Connectors

A NEW range of aluminium-cased, multi-pin connectors, the Mark 6, is now available from The Plessey Company. These connectors embody many singular features and they also accommodate a considerably greater number of contacts than other Plessey connectors of similar size.

Mark 6 connectors are available in four sizes with a fixed and free unit in each; both units are obtainable with either plugs or sockets and are easily convertible to coupler units. A silicone-rubber moulding forms the insulator and fully shrouds individual contacts, cable joint and a portion of the cable dielectric.

Insulation resistance between contacts and earth throughout is greater than $10^4 M\Omega$ at 500V.

The voltage rating is 1kV r.m.s., irrespective of contact class, at ground level, reducing to 350V at 70,000ft, or under equivalent conditions. Current ratings range from 5A to 12A and the connectors are satisfactory for operation in ambient temperatures between −55°C and +155°C.

Contacts are silver-plated brass and socket inserts are designed to give equal mating loads irrespective of the length of engagement.

These new connectors can be used in four alternative positions by merely varying the position of the bayonet couplings. This feature prevents mis-coupling to wrong units and also prevents mis-mating. The connector is designed to meet the major performance requirements of British Military Specifications ELI987 and DEF5321, and American Military Specifications MIL-C-5015D and MIL-C-26500 (U.S.A.F.).

A special high quality connector with nickel-plated housings and gold-plated contacts is available to special order. Further details can be obtained from The Plessey Co., Ltd., Ilford, Essex.

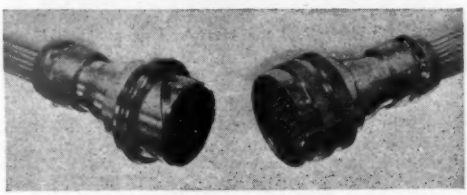

The new versatile Mark 6 Plessey multi-pin connector.

Multi-channel Oscillograph

THE new Savage and Parsons Type RG32-12/15 multi-channel oscillograph has a response of up to 1000c/s at a sensitivity of 7.5mA/cm. Eight alternative paper speeds from 5in/min to 150in/sec can be used, and a well-defined trace is obtainable at writing speeds of 12,000in/sec. Up to 200 feet of paper can be recorded at any one time and this can either be run continuously or alternatively automatically stopped after 2, 5, or 10 feet have been used. Identification of each channel every two feet irrespective of the paper speed is provided by a sequential interruption of each trace. The signals are obtained from mirror galvanometers and the traces developed spontaneously within a few seconds by using ultra-violet sensitive paper. The magnet block carries fifteen galvanometers but some of



Savage and Parsons Multi-Channel Oscillograph.

these will usually be used as time markers or, connected to the mains, as a reference frequency. The cost of this oscillograph is in the region of £1,200, the exact value being obtainable on application. It is manufactured by Savage and Parsons Ltd., of Watford, Herts.

Sub-miniature I.F. Transformers

A TRULY sub-miniature transformer, the "Fidis," which measures only ¼in in diameter and ¼in high, is being produced in France primarily for use in pocket-

Orega "Fidis" sub-miniature i.f. transformer compared in size with a cigarette.

sized transistor receivers, but it has, also, applications wherever space is strictly limited. The base soldering pins are positioned so that the transformer can be used in printed circuits.

Despite its diminutive size it is fully screened and the "Q" of the windings is claimed to be of the order of 150.

Further details can be obtained from the French company Orega, 106, rue de la Jarry, Vincennes (Seine) France, a subsidiary of the Compagnie Générale de Télégraphie Sans Fil of Paris.

Transistor DC/DC Converters

RECENTLY introduced by Aveley Electric is a range of transistor converters supplying h.t. voltages from 6V to 24V batteries. A special feature of the Avel converters as they are called, is the use of toroidally-wound transformers on H.C.R. square-loop type magnetic cores, together with bifilar windings to ensure accurate balance and fast switching of the transistors with over-shoot voltages kept to a minimum.

The converters, which are available with ratings of 5W to 120W, provide normally 300V d.c. output with intermediate tappings of 200V and 250V. Adequate protection is provided to prevent damaging the transistors by inadvertently reversing the polarity of the input or by other wrong connections.

Shown in the illustration is one of the basic units employed in the converters, the massive chassis block forming a heat sink for the transistors. This basic unit can be fitted in a variety of housings to meet users' requirements. By duplicating and triplicating the basic units in a single housing higher power, or voltage, outputs and/or multiple voltages are readily obtainable.

The basic units are very compact, the chassis, or heat sink, measuring only 3¼in × 2½in with height dependent on output rating. In a 45-Watt unit, for example, this is about 3in.

Further details can be obtained from Aveley Electric Ltd., South Ockendon, Essex.



Chassis of a typical Avel transistor DC/DC converter made by Aveley Electric.

Television Aerial Isolator

TO the Egen range of components has now been added an aerial isolator, Type 364. It isolates the aerial on a.c./d.c. television receivers and is a single compact rugged unit which complies fully with the individual requirements of BS415. Insertion loss is very low and its

Egen television aerial isolator.

electrical specification ensures maximum performance at all frequencies envisaged for domestic receivers.

It is completely co-axial with full screening of the inner conductor. The series inductance of the feed-through capacitor in the outer conductor is exceptionally low, which is a desirable feature. Feed-through capacitors in both conductors are each 470pF. They are tested to 3,000V d.c.

Provision is made for direct mounting to the receiver chassis or to a separate bracket and the isolator can be supplied with any required length of coaxial cable for connection to the receiver input circuit. The external socket accepts a standard coaxial plug to R.E.C.M.F. specification. The makers are Egen Electric Ltd., Charfleet Industrial Estate, Canvey Island, Essex.

Transformer Kits

THE introduction of a range of transformer kits comprising a stack of laminations, a bobbin and fixing clamps where appropriate, will come as welcome news to many concerned with the construction of a prototype iron-cored transformer, and these also include home constructors.

Fifteen sizes and three different lamination materials, Silcor, Radiometal and Mumetal respectively, are available and prices for single kits range from 9s 3d to 15s 6d in Silcor, 9s 3d to 63s 9d in Radiometal and 9s 6d to 93s in Mumetal. Further details and prices for quantities are obtainable from The Belclere Company Ltd., 171 Cowley Road, Oxford.

New Plastic Foil Capacitors.—The following corrections should be made to the report on the Tropyfol capacitors on page 616 of the December issue. The largest capacitance in the 400V range is 0.47μF. The 125V type measuring 4.5 × 12mm is a 0.01μF capacitor while the 13 × 24mm capacitor of 1μF is a 125V type.

*Radiotelephones by **ATE**—a vital service for isolated communities*

In situations like this...

This bungalow—located in the heart of one of Malaya's largest rubber plantations—is the home of the estate superintendent. Isolated by many miles of dense jungle, he depends upon modern, reliable methods of communications for day-to-day administration, exchange of information and security.

In situations like this, the new A.T.E. Type 800 equipment, which has been extensively tested under arduous tropical conditions, can supply the vital link. Latest in the A.T.E. single-channel, V.H.F., Rural Radiotelephone range, the versatile Type 800 can be linked direct to the nearest telephone exchange to provide duplex speech with full signalling and dialling facilities. The most advanced of its kind, Type 800 has already proved itself in service to be absolutely reliable and efficient.

TYPE 800

ATE Radiotelephones are used by industrial, mining, agricultural, civil and military enterprises—and by research and survey teams—in 60 countries.

Extended frequency coverage over V.H.F. and U.H.F. bands

New compact cabinet-type construction with slide-in chassis for easy access and maintenance

Plug-in test meter facilities

High or low power versions to suit propagation conditions

Will work into any type of telephone exchange with improved 'outband' tone signalling facilities.

Modern design conforming to G.P.O. and D.O.T. specifications

If you would like to know more about this new mains-operated equipment, or its battery-operated counterpart, the "Country Set", *write for full details to your local representative . . . or send for bulletin REB.4101/1 to . . .*

AUTOMATIC TELEPHONE & ELECTRIC CO. LTD

STROWGER HOUSE, 8 ARUNDEL STREET, LONDON, W.C.2. Telephone: TEMple Bar 9262

*The specialist knowledge of **ATE** is at your disposal—take advantage of it!*

Redifon

R.145

COMMUNICATIONS RECEIVER

From every point of view the Redifon R 145 upholds its world-wide reputation as the finest communications receiver that has ever been produced. Re-setting accuracy better than 1 kc. and many other important features are included in the outstanding specification of this superb receiver. We shall be glad to supply you with full details on request.

REDIFON LIMITED Communications Sales Division, Broomhill Road, London S.W.18

Telephone: VANdyke 7281 *A Manufacturing Company in the Rediffusion Group*

Iron-Cored Coupling Transformers

With Particular Reference to the Design of Iron-Cored A.F. Components

BY D. SAULL

A TRANSFORMER is like the conjunction in English language—it correctly joins two or more individual circuits together; e.g., a microphone to the input of an amplifier, one stage of an amplifier to the next stage, an amplifier output to a speaker or transmission lines, etc. And for each particular application a transformer must usually be specifically designed. The range of such designs is therefore very large.

The block diagram in Fig. 1 shows the family tree, as it were, illustrating some of the many uses to which transformers may be put in electronic circuitry. If the reader pauses to consider that a complete book could be written on the subject matter of any one application—say pulse transformers—it becomes evident that a single article in a journal could not possibly cover the complete subject of transformers.

The purpose of this article is, therefore, most certainly not a comprehensive study of impedance matching transformers; neither is this article intended to be read by transformer designers. No, its purpose is to aid the engineer, whose mind is centred on the equipment he is designing and from which he does not wish to be deviated, to reach a starting point if he is obliged to get down to designing his own transformer. Alternatively, to assist the engineer to call up his requirements if he is fortunate enough to possess the facility of a transformer design department to supply his needs. For these reasons, the author intends to generalize in his statements to avoid entering into details, which would defeat the purpose of this article.

Before leaving the reference to a transformer design department, it may be worth explaining the value of such a department to a firm employing a fair number of design and development engineers.

It can be shown that the average transformer design time for a transformer design department, over a period of time, is half to two thirds the average time taken when individual design and development engineers design their own transformers. This is a money-saving consideration for readers in a managerial position in industry to ponder.

The reason for this shorter design time, claimed by transformer design departments, is twofold. First, although the transformer designer is no more skilled than the development engineer, and perhaps even less skilled, he has the advantage of constantly designing transformers and so learns the short cuts; whereas the development engineer is called upon only infrequently to design transformers. Secondly, one design frequently assists another design, and often a transformer is a modification of a previous design; a transformer design department has records of the work carried out but—in the case where separate designs are done by various engineers—Fred doesn't know what George is doing.

As the subject matter of this article is not intended to be "the management of industry," let us press on with transformer design.

A transformer is basically a number of turns of conducting wire wound round a block of iron. If two such windings, consisting of any number of turns, are wound round any block of iron and an a.c. signal is applied to one winding some form of a.c. signal will appear across the second winding. What relation the output signal will bear to the input signal, in this case, is anyone's guess. And, perhaps, here we come very near to the heart of the subject.

As was said earlier, a transformer correctly joins together two or more electric circuits. It may serve to connect a low-output impedance microphone to the high impedance grid circuit of a valve, or the high-output impedance of a valve to the low-input

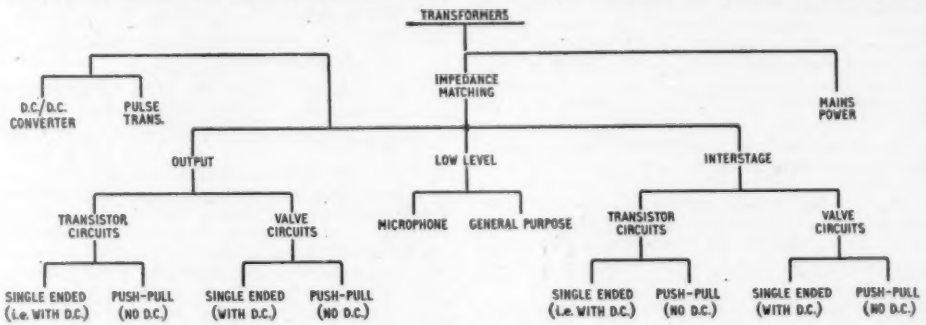

Fig. 1. Transformer family tree showing some of its numerous applications

impedance of a speaker. Whichever the case, if the transformer is ideally designed, each circuit will be correctly terminated and the respective circuits do not know that the transformer is there at all—like the broody hen and the china egg. However, the china egg is cold to sit upon, and the practical transformer is not ideal, having losses, phase shift, etc.

How near to the ideal may the engineer expect to get? The problem is rather like a tug-of-war contest with perfection on one end of the rope and costs on the other. The road to perfection leads to higher grade transformer laminations, larger lamination sizes, and longer development time; factors which may be expressed in terms of £, s, and d.

So a compromise must be made; and usually the engineer is obliged to specify the lowest standards that he can tolerate. The maximum insertion loss

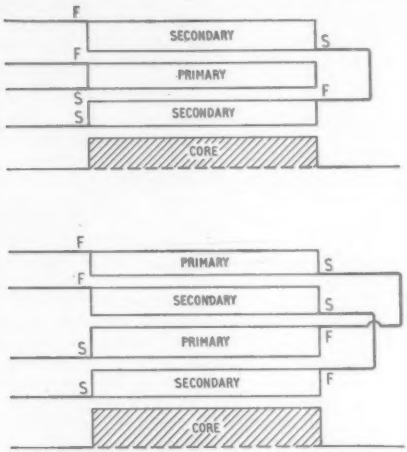

Fig. 2. Two methods of sectionalizing windings

and harmonic distortion, together with the minimum frequency response, that is acceptable to the engineer, must be specified.

A transformer functions electrically the same whatever its application, and its design is a compromise of a number of variables. For one application insertion loss is an important factor, for another it is of little importance; the same applies for winding d.c. resistance, leakage inductance, etc.

Perhaps the easiest method of reaching a compromise between perfection and costs is to examine the merits of the various lines of action that the engineer may take. The author will, therefore, try to take the reader briefly, in turn, through the practical considerations required for the design of each transformer application illustrated in the family tree in Fig. 1. But, before passing on, it might serve well to discuss some of the various grades of transformer irons available, the methods of winding, and three different ways of assembling the laminations.

Winding Methods.—There are two main methods of winding transformers, (*a*) paper interleaved layer winding on a cheekless former and (*b*) layer winding without interleaving paper on a former with end cheeks.

In the author's opinion, type (*a*) is more suitable for the larger variety of transformer, e.g., the output transformer of a high-quality 10-watt a.f. amplifier. The figures for overall space factor and the turns-per-inch-squared quoted in the Tables 1 and 2 of the article "Power Transformer Design," published in the June (1960) issue of WIRELESS WORLD, will hold good for this application. Type (*b*) should be employed in the smaller variety of transformer for the reason that, when interleaving paper is employed, the thickness of the paper becomes comparable with the diameter of the winding wire used. For this smaller variety, an overall space factor of 30 to 35%, which includes the former, should be assumed.

Flux Gradient.—The flux density across the window area of the laminations is not constant due to the increasing length of the iron path; if the lines of flux are compared with the rings of water ripple surrounding a stone thrown into a pond, this idea becomes more evident. This flux gradient increases the leakage inductance. To reduce the leakage inductance the primary winding may be split into two or more sections and sandwiched between the secondary windings. The result of so dividing the primary winding into sections unfortunately increases the capacitance between windings. This capacitance may in turn be reduced by separating the primary and secondary windings by several layers of interleaving paper. Further sectionalizing and reversing the direction of the windings, but connecting the windings in the same magnetic sense, results in improved characteristics; Fig. 2 illustrates two possible methods.

A compromise must be arrived at to obtain the required results. For the above considerations, the number of turns on the primary winding should tend towards a minimum, which suggests in order to maintain the required primary inductance, that a core material with as high a permeability as possible—consistent with costs—should be employed. The latter applies particularly to low level transformers.

Grades of Iron.—Commencing from the lowest, in permeability and cost, the following list of core materials will give an approximate guide to the respective applications:

(*i*) *Silcor 25;* 0.014in and 0.020in thickness—1% silicon content.

(*ii*) *Silcor 107;* 0.014in and 0.020in thickness—3½% silicon content.

(*iii*) *"C" Cores;* 0.002in to 0.013in thickness—cold rolled grain-oriented silicon steel—may be worked at 30% higher flux densities than (*i*) or (*ii*).

These first three grades are suitable for use in output transformers employed with higher-power, good-quality a.f. amplifiers. For this application, it is better to have a large core of cheaper material than a smaller core of the higher, more expensive, grade material such as Radiometal or Mumetal.

"C" cores are particularly adaptable to such uses due to their shorter mean magnetic-path length and higher permeability, and may be conveniently worked at 5×10^3 gauss. This material saturates at

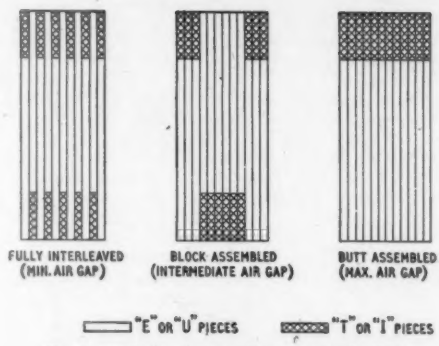

Fig. 3. Methods of assembling core laminations.

a higher value of d.c. component, which is worth bearing in mind when designing transformers carrying d.c. The range of sizes obtainable extends down to small sizes suitable for interstage transformers with a d.c. component.

(*iv*) *Radiometal* lies between silicon steel and Mumetal, and may be worked at flux densities twice that for Mumetal, but does not have as high a permeability as the latter material.

(*v*) *Mumetal.* The use of this material, with its high permeability, makes possible the design of miniature transformers for transistor circuits and transformers of smaller size with high primary inductance and low leakage inductance. The material saturates at low values of d.c. and is, therefore, not suitable for applications where a d.c. current is present. However, where the d.c. is of low value, and the primary inductance is not high, this material may be used, i.e., transistor a.f. interstage transformers.

Average Permeability:

Silicon Steel—350

Radiometal—1,600

Mumetal—15,000

Turns Reduction for a Given Inductance:

$$\frac{\text{Radiometal}}{\text{Silicon Steel}} = 2.14 \text{ to } 1$$

$$\frac{\text{Mumetal}}{\text{Silicon Steel}} = 6.8 \text{ to } 1$$

$$\frac{\text{Mumetal}}{\text{Radiometal}} = 3.3 \text{ to } 1$$

Methods of Assembling Laminations.—Fig 3 illustrates the three main methods of assembling the laminations to produce various degrees of effective air gap in the iron core.

Low-Level Transformers.—A low-level transformer is one which is used to couple two circuits where the power available from the primary circuit is of a small order, i.e., milliwatts. Such applications might be a microphone transformer, a transformer connecting a 600-ohm signal generator to a 20-ohm load, a moving-coil meter transformer to extend the current measuring range, etc.

The first consideration might be a low insertion loss, which calls for a low-loss, high-permeability type of lamination—Mumetal or Radiometal—the author's choice would be Mumetal. The second consideration is frequency response; the third consideration, closely related to frequency response, is second harmonic distortion.

Low Frequencies.—The distortion in a transformer at the lowest frequency is dependent upon the maximum operating flux density, and falls off sharply with frequency increase.

The frequency response at the lowest frequency is dependent upon the value of shunt inductance of the primary winding. Fig. 4 illustrates how this fall off at the lower frequencies arises, and the table gives practical values.

High Frequencies.—At high frequencies the leakage inductance and the capacitance of the windings increases the frequency fall-off. A well-designed low-level transformer may have a frequency response of from 20c/s to 100kc/s. The design problems of such a transformer might be listed as follows:

(*a*) High primary inductance.
(*b*) Low leakage inductance.
(*c*) Low flux density—order of 600 gauss.
(*d*) Low winding capacitance.
(*e*) Low d.c. resistance—dependent upon application.

Factors (*a*) and (*b*) plus (*d*) work in opposition because by increasing the number of turns, to increase the primary inductance, the leakage inductance increases proportionately (i.e., leakage inductance and primary inductance are both a function of the square of the number of turns). The capacitance of the windings also increases.



Fig. 4. Equivalent transformer primary circuit.

Increasing the stack size increases the primary inductance but does not reduce the leakage inductance to the extent that might at first be expected, due to the increased mean turn length of the windings.

The answer lies in using core materials of high

Table

At flux density = 600 gauss		
X_L equal to	**Total % harmonic distortion**	**Frequency fall-off**
6R	0·3	
4R	0·4	
2R	0·7	1dB
R	1·7	3dB

permeability—hence a very good reason for using Mumetal. Radiometal follows some little way behind—if the purse strings are tied.

The tighter the specification, the greater the time taken to produce the completed design. The designer is fortunate indeed if he produces the finished transformer at the first attempt. The procedure is more likely to result in a first-off version to be tested and the shortcomings noted. This is where the transformer design department again has the advantage—the second-off and final design, in this case, will be the modification to a previous near design.

Making a Start.—The required primary inductance should first be calculated from $\omega L = R$, $2R$, $4R$ or $6R$ according to the permissible distortion at the lowest frequency to be reproduced (see table).

The next step is the choice of lamination size, which, unless a direct selection can be made based on previous experience, must satisfy the two following equations:—

(i) $$N^2 = \frac{L \times 10^8 l}{3.2 \times A \times \mu}$$

(ii) $$B = \frac{E \times 10^8}{28.6\ fNA}$$

Where:

μ = Initial permeability.
L = Henries.
A = Cross-sectional area of the core in sq in.
l = Mean magnetic path length in in.
N = Number of turns.
f = Frequency (lowest).
B = Flux density (order of 600 gauss).
E = Applied maximum voltage when the transformer is in circuit.

Having selected a suitable lamination size, the number of primary turns required should be evaluated from equation (i) and then a check made using equation (ii) to ascertain that the flux density is not in excess of 600 gauss.

The secondary turns are then evaluated from:—

$$\text{Turns ratio} = \sqrt{Z_1/Z_2}$$

where Z_1 and Z_2 are the input and output circuit impedances.

When a sample transformer has been wound it should be tested for frequency response. This may be done with the aid of a signal generator and a valve voltmeter. The transformer should be correctly terminated in a resistive load and the voltage appearing across the primary winding at A (see Fig. 5) should be adjusted, with the aid of the valve voltmeter, to be that which will appear across the winding when the transformer is connected in circuit. Fig. 5 illustrates the circuit required for testing such a transformer with a turns ratio of 2 to 1. The valve voltmeter is then connected across the secondary B and the voltage noted. This procedure is repeated in steps throughout the frequency range for which the transformer is designed. A frequency response graph is then plotted and the insertion loss evaluated.

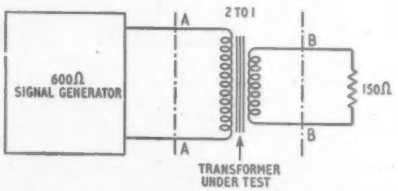

Fig. 5. Arrangement of circuit for testing a transformer

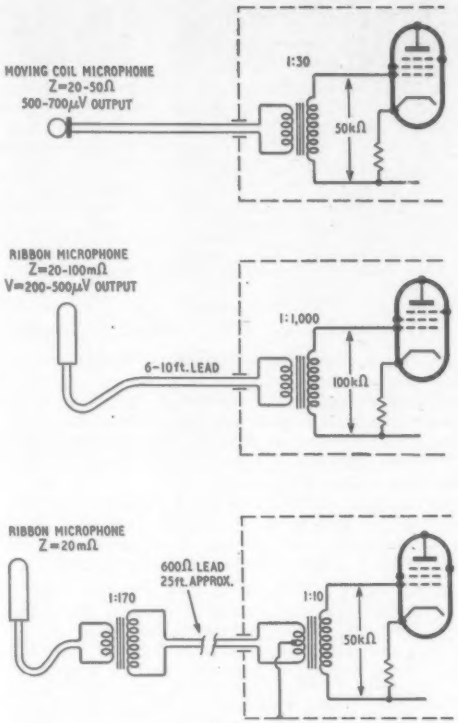

Fig. 6. Matching microphone to input of amplifier

Frequency fall-off at the low-frequency end calls for an increase in primary inductance; frequency fall-off at the high frequency end is due to either leakage inductance or winding capacitance. The latter factors may be identified by connecting a small capacitor across the secondary winding and if the fall-off in frequency response does not increase at this end the trouble is leakage inductance—if it does fall off more sharply, then the trouble is capacitance. The alterations necessary to improve these short-comings have already been discussed earlier in "Flux Gradient."

Microphone Transformers.—The low-impedance ribbon and moving-coil type microphones require a matching transformer to connect the low-impedance of the microphone to the high-impedance grid circuit of the first amplifier valve.

Fig. 6 illustrates these two types of microphone matching. The transformer windings are wound for Radiometal or Mumetal laminations.

To reduce hum pick-up when the transformer is mounted in the amplifier, narrow "U" laminations

are used, the induced hum voltage cancelling out in the coils wound equally on either limb. The secondary winding is usually wound with fine wire—order of 50 s.w.g.—the high d.c. resistance being unimportant in this application. The windings of the secondary may conveniently be six separate bobbins, three on either limb of the "U" laminations; the primary consisting of thin copper strip.

Fig. 7 shows a suitable transformer of turns ratio 1 to 1,000; the secondary is made up of six bobbins each of 1,000 turns and the primary consists of 6 turns of thin copper strip.

Fig. 7(b) shows the direction of the winding and the resulting magnetic polarity due to the signal current at any instant. It will be seen that, although the two sets of coils are connected to be additive in inductance, the coils on each limb produce magnetic fields that are in opposite directions in plan view. Hence a magnetic field, caused by hum, would produce a hum voltage equal and opposite in polarity in the windings on either limb. The narrow "U" laminations are used to ensure that both sets of coils are in a field of equal hum flux, which might not be so if the limbs were spaced well apart.

Output Transformers.—This type of transformer covers a very wide range and could not be dealt with fully in an article of this nature. They do, however, fall into two main groups, those for push-pull operation and those for single-ended operation. The former have no d.c. component in their windings whereas the latter may have.

For medium power a.f. amplifiers, ordinary silicon irons function quite well. For higher power a.f. amplifiers, in the order of 20 to 30 watts, it is an advantage to use "C" core laminations.

A good rule-of-thumb guide to lamination size is the weight of the core in lb should be 0.17 times the output watts of the amplifier and the volume in cubic inches should be 0.7 times the output watts of the amplifier. For good fidelity these figures should be doubled.

The maximum flux density of operation should not exceed 5 kilogauss for a reasonable distortion factor. The calculations for primary inductance are the same as under "Low-Level Transformers."

When the primary windings carry a d.c. component it may be necessary to increase the effective air gap in the core by block or butt method of assembling the laminations.

The frequency response of output transformers is a similar consideration to the factors effecting interstage transformers.

The permeability of the core will vary with applied signal level—thus the frequency response will normally extend lower as the signal level is increased.

When a transformer is connected to a source of zero impedance there is no voltage drop incurred by the magnetizing current. As in the practical case there is source impedance, a voltage drop will occur due to the magnetizing current; since the magnetizing flux is not by any means a sine-wave for an input sine-wave current, due to the B/H curve, distortion resulting from the out-of-phase magnetizing current occurs.

The ratio of $\omega L/R$ (where R is the resultant of anode and load resistances in parallel) should be kept as low as possible consistent with other requirements. The d.c. resistance of the primary, and of the reflected secondary, windings may be regarded as part of the source impedance for this purpose. Further to this consideration, the maximum flux density should be restricted to the straight part of the B/H curve. Fig. 8 illustrates these principles.

Interstage Transformers for Class A and Class B Working.—The amplification of the stage at mid-frequency is very nearly equal to the product of the

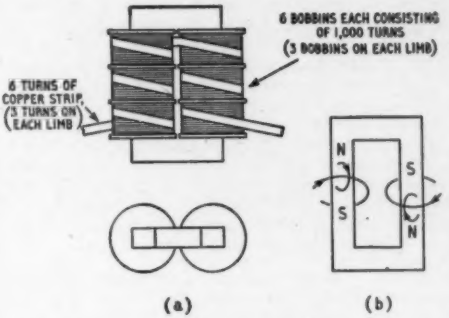

Fig. 7. Hum pick-up by microphone transformer minimized by an "astatic" form of winding using both limbs of a "U"-shaped core. (a) shows practical assembly and (b) the direction of winding

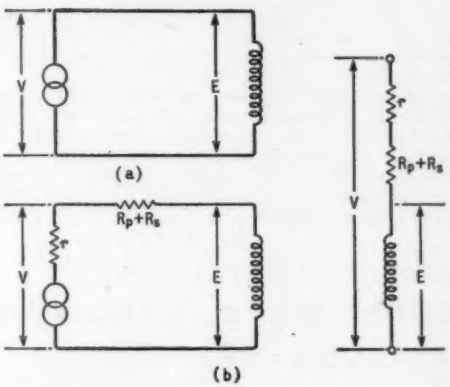

Fig. 8. Output transformer equivalent circuit; (a) no source impedance V = E; (b) with source impedance and resistance of windings. Magnetizing current a function of frequency and load current

amplification factor of the valve and the turns ratio of the transformer.

The gain falls off at low frequencies due to the decrease in the reactance of the transformer primary winding. At frequencies at which $\omega L = R$ the response will fall off 3dB; at frequencies $\omega L = 2R$ the response will fall off 1dB.

The leakage inductance and shunt capacitance of the transformer, in conjunction with the anode and the winding resistances, form a low-Q resonant circuit. The gain will fall off sharply above this resonant frequency. This resonant frequency may

be varied by altering the value of the leakage inductance or the winding capacitance.

Transistor Output and Interstage Transformers.—These transformers may be wound on very small Mumetal laminations. Because the impedances associated with transistors are small compared with those for valves, primary inductances are of a low order—e.g. 250 to 500 millihenries.

Pulse Transformers.—It is not intended to more than mention this type of transformer in passing except to say that, due to the wave shape of the pulses the transformer is required to pass, the harmonic content may reach high frequencies. Trouble is frequently experienced when the leakage inductance resonates with the winding capacitance producing unwanted spikes.

To minimize this effect, a copper screen may be placed between the primary and the secondary windings and the screen connected to an earthy point in the circuit. This screen consists of one turn of 0.002-in copper foil interleaved with paper to prevent a short-circuited turn.

D.C./D.C. Transistorized Converters.—Toroidal cores are usually found most efficient for these types of circuits, particularly when the VA output is of a small order. However, transformers utilizing medium grade silicon-iron laminations can be designed for this application which are fully satisfactory for VA ratings in excess of 6VA, working at frequencies up to 1,000c/s.

Ferrite materials are also employed for circuits operating at several kc/s where, due to the low value of smoothing components at this frequency, the overall size of the complete apparatus may be kept small.

The nature of the converter circuit requires that saturation of the core is reached twice in each cycle of operation. The use of silicon-iron laminations therefore restricts the frequency of operation. The iron losses in the core are the chief losses in this type of circuit—hence a minimum VA rating for a high efficiency working is fixed by the relation between total losses and the output VA. Since this type of equipment is mostly used working from storage batteries, efficiencies are important.

Although the subject matter in this article is, of necessity, very briefly dealt with it is hoped that it will serve some use to the engineer, even if only as a pointer to select a starting point from which he may approach his objective, and to the management in the electronic industry in illustrating the advantages of setting aside a department, however small, for the specific purpose of designing transformers.

HI-FI P.A.

READERS who visited the National Radio Show and were impressed with the quality of reproduction on the B.B.C. Gramstand may be interested in the following brief details of the installation:—

The requirements were for high-quality public address coverage over a large area to feed a standing audience of up to 1,500 at one time. Anything less than high quality would not have served the purpose because the main output from this exhibit was commercial records which nowadays employ such "gimmicks" as close-balance, pre-emphasis, accentuated reverberation and frequency correction which would be lost on the normal type of public address system.

Six high-quality monitoring loudspeakers of a type normally used in control rooms and control cubicles and known as the LSU/10 were sited at strategic points round the audience area. The loudspeakers, mounted on plinths so that the sound output was not baffled by people standing in front of them, were built into the auditorium walls and in pillar casings.

Basically, the construction of an LSU/10 loudspeaker consists of an acoustic cabinet with a vented enclosure containing a large unit with a 15-in cone carrying a 3-in speech coil. The middle and high-frequency unit is mounted concentrically with the large unit and has a light domed aluminium diaphragm, 1¾-in diameter, attached to a speech coil of the same diameter. There is an additional tweeter unit separate from the main loudspeaker units to extend further the top frequency response. The 10-watt amplifier feeding the speaker units is also contained in the cabinet.

SHORT-WAVE CONDITIONS *Prediction for January*

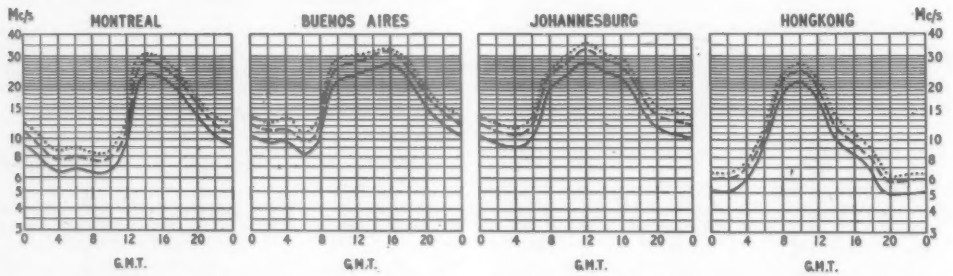

THE full-line curves indicate the highest frequencies likely to be usable at any time of the day or night for reliable communications over four long-distance paths from this country during January.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

Vortexion
quality equipment

120/200 WATT AMPLIFIER

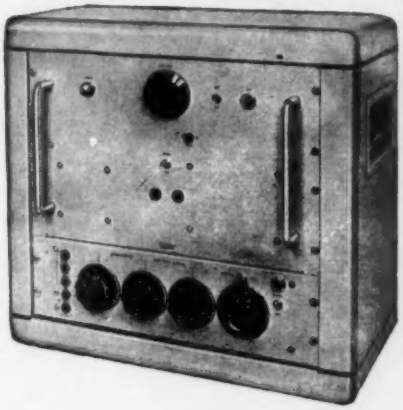

Will deliver 120 watts continuous signal and over 200 watts peak Audio. It is completely stable with any type of load and may be used to drive motors or other devices to over 120 watts at frequencies from 20,000 down to 30 cps in standard form or other frequencies to order. The distortion is less than 0.2% and the noise level —95 dB. A floating series parallel output is provided for 100-120 V. or 200-250 V. and this cool running amplifier occupies 12½ inches of standard rack space by 11 inches deep. Weight 60lb.

30/50 WATT AMPLIFIER



Gives 30 watts continuous signal and 50 watts peak Audio. With voice coil feedback distortion is under 0.1% and when arranged for tertiary feedback and 100 volt line it is under 0.15%. The hum and noise is better than —85 dB referred to 30 watt.
It is available in our standard steel case with Baxendale tone controls and up to 4 mixed inputs, which may be balanced line 30 ohm microphones or equalised P.U.s to choice.

ELECTRONIC MIXER/AMPLIFIER

This high fidelity 10/15 watt Ultra Linear Amplifier has a built-in mixer and Baxendale tone controls. The standard model has 4 inputs, two for balanced 30 ohm microphones, one for pick-up C.C.I.R. compensated and one for tape or radio input. Alternative or additional inputs are available to special order. A feed direct out from the mixer is standard and output impedances of 4-8-16 ohms or 100 volt line are to choice. All inputs and outputs are at the rear and it has been designed for cool continuous operation either on 19 x 7in. rack panel form or in standard ventilated steel case.

Size 18 x 7½ x 9½in. deep.

Price of standard model **£49.**

12-WAY ELECTRONIC MIXER

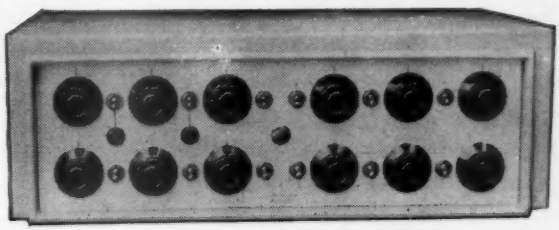

The 12-way electronic mixer has facilities for mixing 12 balanced line microphones. Each of the 12 lines has its own potted mumetal shielded microphone transformer and input valve, each control is hermetically sealed. Muting switches are normally fitted on each channel and the unit is fed from its own mumetal shielded mains transformer and metal rectifier.

Also 3-way mixers and Peak Programme Meters. 4-way mixers and 2 x 5-way stereo mixers with outputs for echo chambers, etc. Details on request.

Full details and prices of the above on request

VORTEXION LIMITED, 257-263 The Broadway, Wimbledon, London, S.W.19

Telephones: LIBerty 2814 and 6242-3 Telegrams: "Vortexion, Wimble, London."

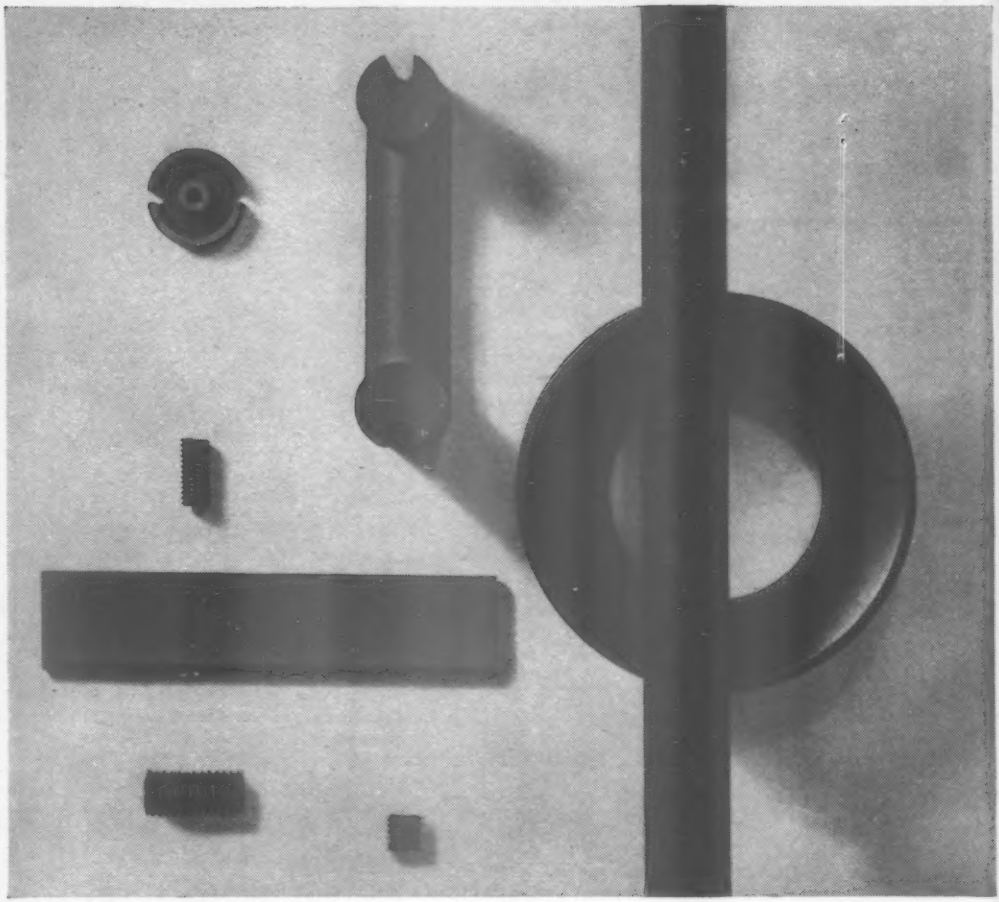

For superior and reliable ferrite cores use *FERRAMIC by Plessey

Plessey Ferramic components are already accepted for their reliability and are produced by advanced techniques with rigid quality control. As leading producers of ferrite components Plessey offer wide ranges of pot cores and slugs, aerial rods and TV cores—together with any help you may need on applications. A series of data sheets covering the range of products is freely available on request.

* **FERRAMIC** is a registered trade mark

Components Group
CHEMICAL AND METALLURGICAL DIVISION
THE PLESSEY COMPANY LIMITED
Wood Burcote Way · Towcester · Northants
Telephone : Towcester 312/6

OVERSEAS SALES ORGANISATION: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · TELEPHONE: ILFORD 3040

TC2/6

TECHNICAL NOTEBOOK

Adjustable Waveguide Termination recently developed at the U.S. National Bureau of Standards has two moving parts: a short-circuiting plunger and a resistive vane. The double-exposure illustration shows the plunger and vane positioned inside a rectangular waveguide.

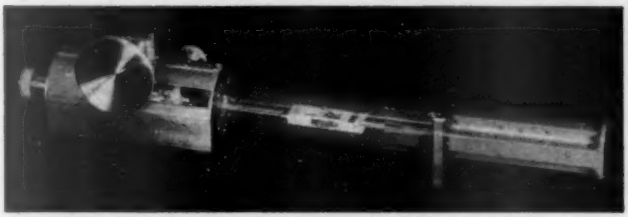

Independent mechanical controls are provided for rotating the vane, longitudinally sliding the vane relative to the short circuit, and sliding the entire termination assembly along the waveguide. In operation, the resistive vane reflects some energy back towards the signal source. The remaining energy is either partially absorbed by the vane or reflected by the short circuit back towards the signal source. The relative phase of the reflections from the vane and short circuit can be altered by varying the distance between them. The amount of energy reflected by the short circuit depends upon the amount left unabsorbed by the vane, and this can be varied by rotating the vane.

New Transistor Manufacturing Technique developed by Bell Telephone Laboratories reduces switching times and collector resistances of diffused-base transistors by factors of more than ten. Diffused-base transistors require a collector region of relatively high resistivity in order to attain a low capacitance and high voltage breakdown. A lightly-doped collector region is thus used, and ideally this should only be about 0.1 mil thick. However, if the collector wafer were made as thin as this, it would be extremely difficult, if not impossible, to handle mechanically. Thus a collector thickness about thirty times greater is normally used, although increasing the collector thickness increases both its resistance and also, through carrier-storage effects, the transistor switching time. Thinner collector regions can, however, be made and utilized by growing them on a low-resistivity heavily-doped mechanically supporting wafer. When the thin collector film is a direct extension of a single-crystal supporting wafer it is said to be "epitaxial". Diffused-base transistors have been made at Bell Telephone Laboratories on epitaxial layers of both germanium and silicon and have shown the improvements to be expected from a thinner collector region. For example, the switching time in a typical circuit was reduced from 200 to 20 mμsec and the collector series resistance was decreased by a factor of more than ten.

Digital Voltmeter using a stroboscopic technique is being imported into this country from America by Scientific Furnishings Ltd. of Poynton, Cheshire. In this voltmeter the 250 indicating numbers are registered on a drum which is rigidly coupled to the spindle of a potentiometer. This potentiometer has a standard voltage developed across it and its spindle is rotated at 1500 r.p.m. so that its wiper generates a sawtooth voltage. This sawtooth voltage is continually compared electronically with the unknown voltage so as to fire a stroboscopic lamp whenever the sawtooth and unknown voltages are equal. For a fixed input voltage the stroboscopic lamp will thus be fired at corresponding points on each ramp of the sawtooth waveform, so that the same number on the drum will be illuminated by each flash of the lamp. A slowly-varying input voltage will be indicated by a slowly varying number, and interpolation between two partially-visible numbers will give a measure of a voltage between these two numbers. Alternatively, only the nearest number to the actual voltage can be indicated. This is done by making use of an additional set of pulses produced as the numbers pass a phototransistor.

JANUARY MEETINGS

Tickets are required for some meetings; readers are advised, therefore, to communicate with the secretary of the society concerned

LONDON

4th. Brit.I.R.E.—"Automatic techniques in civil air line communications systems" by W. E. Brunt at 6.30 at the London School of Hygiene, Keppel Street, W.C.1.

5th. Institution of Mechanical Engineers.—Discussion on "The reliability of mechanical engineering parts of data processing systems" at 10.30 at the Institution, 1 Birdcage Walk, S.W.1.

5th. I.E.E.—Hunter Memorial Lecture on "The application of electronics to the electricity supply industry" by Dr. J. S. Forrest at 5.30 at Savoy Place, W.C.2.

9th. I.E.E.—"Recent research in thermionics" by Dr. G. H. Metson at 5.30 at Savoy Place, W.C.2.

10th. I.E.E.—"Precision measurement" by G. H. Rayner and A. Felton, with supporting papers, at 5.30 at Savoy Place, W.C.2.

11th. Brit.I.R.E. — "Multi-layer switching devices" by Dr. G. F. Taylor at 7.15 at the London School of Hygiene, Keppel Street, W.C.1.

12th. Radar and Electronics Association.—"Programme circuits on telephone plant" by G. Stannard at 7.30 at the Royal Society of Arts, John Adam Street, W.C.2.

13th. Television Society.—"A wide range standards converter" by E. R. Rout and R. F. Vigurs at 7.0 at the Cinematograph Exhibitors' Association, 164 Shaftesbury Avenue, W.C.2.

19th. Brit.I.R.E. — Symposium on "Alpha numeric displays" at 6.30 at the London School of Hygiene, Keppel Street, W.C.1.

20th. Institute of Navigation.—"Presentation of height information in aircraft" by A. Stratton and K. R. Honick at 5.15 at the Royal Geographical Society, 1 Kensington Gore, S.W.7.

20th. B.S.R.A.—"Modern electrostatic microphones" by F. W. O. Bauch at 7.15 at the Royal Society of Arts, John Adam Street, W.C.2.

20th. Junior Institution of Engineers.—"Radio investigations of the solar atmosphere" by J. Heywood at 7.0 at Pepys House, 14 Rochester Row, S.W.1.

23rd. Institute of Physics and Physical Society.—"Some new applications of radar" by Dr. E. Eastwood at 6.0 at 47 Belgrave Square, S.W.1.

24th. I.E.E. — Discussion on "Machine-tool control" opened by Dr. E. H. Frost-Smith at 5.30 at Savoy Place, W.C.2.

25th. I.E.E.—"Generation and amplification in the millimetre wave field" by W. E. Willshaw at 5.30 at Savoy Place, W.C.2.

25th. Brit.I.R.E.—"Noise correlation measurements" by K. R. McLachlan at 6.30 at the London School of Hygiene, Keppel Street, W.C.1.

26th. Television Society.—Fleming Memorial Lecture on "Behind the eye" by Prof. D. M. MacKay at 7.0 at the Royal Institution, Albemarle Street, W.1.

BIRMINGHAM

2nd. I.E.E.—Discussion on "Broadening university courses" opened by Dr. H. E. M. Barlow at 6.30 at the James Watt Memorial Institute.

13th. Society of Instrument Technology.—"Controls associated with flying" by Capt. A. M. A. Majendie at 7.0 in the Lecture Theatre, Byng Kendrick Suite, Gosta Green College of Technology, Aston Street.

18th. Television Society.—"Video recording" by J. Southgate at 7.0 at the New Physics Lecture Theatre, the University.

23rd. I.E.E. — "Applications of microwaves" by Prof. A. L. Cullen at 6.0 at the James Watt Memorial Institute.

BRISTOL

20th. Institute of Physics and Physical Society.—"The physicist and the technologist in industry" by G. W. Warren at 7.0 at the College of Science and Technology.

CARDIFF

11th. Brit.I.R.E.—"The measurement of ionizing radiation" by R. G. Wood at 6.30 at the Welsh College of Advanced Technology.

CHESTER

26th. Society of Instrument Technology.—"Satellite instrumentation" by Dr. R. C. Jennison at 7.0 in the Lecture Theatre, Associated Ethyl Co., Oil Sites Road, Ellesmere Port.

EDINBURGH

11th. Brit.I.R.E—"A survey of microwave valves" by C. R. Russell at 7.0 at the Department of Natural Philosophy, the University, Drummond Street.

17th. I.E.E. — "Applications of microwaves" by Prof. A. L. Cullen at 7.0 at the Carlton Hotel, North Bridge.

24th. I.E.E.—"The changing face of electronics" by W. E. J. Farvis at 7.0 at the Carlton Hotel, North Bridge.

EVESHAM

16th. I.E.E.—"Magnetic recording of TV programmes" by H. E. Farrow at 7.30 at the B.B.C. Training School, Wood Norton.

FARNBOROUGH

17th. I.E.E.—"Modern ferromagnetic materials" by Dr. F. Brailsford at 6.15 at the Technical College.

24th. Brit.I.R.E.—"Masers and parametric amplifiers" by Dr. W. A. Gambling at 7.0 at the Technical College.

FAWLEY

6th. Society of Instrument Technology.—"Electronics and instrumentation in the glass industry" by J. R. Beattie at 5.30 at the Administration Building, Esso Refinery.

GLASGOW

12th. Brit.I.R.E.—"A survey of microwave valves" by C. R. Russell at 7.0 at the Institution of Engineers and Shipbuilders, 39 Elmbank Crescent.

16th. I.E.E.—"Applications of microwaves" by Prof. A. L. Cullen at 6.0 at the Institution of Engineers and Shipbuilders, 39 Elmbank Crescent.

LEEDS

26th. I.E.E.—Faraday Lecture on "Transistors and all that" by L. J. Davies at 7.0 at the Town Hall.

LIVERPOOL

18th. Brit.I.R.E.—"Microminiaturization" by H. G. Manfield at 7.0 at the Adelphi Hotel.

23rd. I.E.E.—"Cybernetics" by Prof. J. C. West at 6.30 at the Royal Institution, Colquitt Street.

MALVERN

26th. Brit.I.R.E. — "Stereophonic broadcasting" by G. D. Browne at 7.0 at the Winter Gardens.

MANCHESTER

10th. I.E.E.—"Radio communication in the power industry" by E. H. Cox and R. E. Martin at 6.15 at the Engineers' Club, Albert Square.

11th. I.E.E. — "The ultrasonic microscope" by Dr. C. N. Smyth at 6.15 at the Engineers' Club, Albert Square.

17th. I.E.E.—"A universal non-linear filter, predictor, and simulator, which optimizes itself by a learning process" by Prof. D. Gabor, Dr. W. P. L. Wilby and Dr. R. Woodcock at 6.15 at the Engineers' Club, Albert Square.

24th. I.E.E.—Faraday Lecture on "Transistors and all that" by L. J. Davies at 7.30 at the Free Trade Hall.

MIDDLESBROUGH

4th. I.E.E.—"The Fylingdales early warning station" by D. R. Evans at 6.30 at the Cleveland Scientific and Technical Institution.

NEWCASTLE-UPON-TYNE

9th. I.E.E.—Hunter Memorial Lecture on "The application of electronics to the electricity supply industry" by Dr. J. S. Forrest at 6.15 at the Neville Hall, Westgate Road.

11th. Brit.I.R.E.—"The applications of photo-multipliers in industry and research" by J. Hambleton at 6.0 at the Institution of Mining and Mechanical Engineers, Neville Hall, Westgate Road.

16th. I.E.E.—"Precision measurement" by G. H. Rayner and A. Felton, with supporting papers, at 6.15 at the Rutherford College of Technology, Northumberland Road.

19th. Society of Instrument Technology.—"Recent advances in photoelectronic instruments" by H. Loebl at 7.0 in the Conference Room, Roadway House, Oxford Street.

NOTTINGHAM

19th. Society of Instrument Technology.—"The electrical synthesis of music" by A. Douglas at 7.15 at Nottingham & District Technical College, Burton Street.

SHEFFIELD

4th. I.E.E.—Christmas Holiday Lecture on "Colour television" by Dr. R. Feinberg at 3.0 at the City Hall.

18th. I.E.E.—Hunter Memorial Lecture on "The application of electronics to the electricity supply industry" by Dr. J. S. Forrest at 6.30 at the Memorial Hall, City Hall.

SOUTHAMPTON

4th. I.E.E.—"The planning and economics of telecommunication plant" by C. J. Stubbington at 7.0 at the University.

10th. I.E.E.—Discussion on "New semiconductor devices" at 6.30 at the University.

WEYMOUTH

12th. I.E.E.—"Electronic aids to banking and commerce" by Dr. R. Feinberg at 6.30 at the South Dorset Technical College.

WOLVERHAMPTON

11th. Brit.I.R.E.—"An equipment for automatically processing time-multiplexed telemetry data" by N. Purnell and T. T. Walters at 7.15 at the College of Technology.

18th. Institution of Production Engineers.—"The application of electronic computers to production control" by B. L. J. Hart at 7.0 at the College of Technology, Wulfruna Street.

CONFERENCES AND EXHIBITIONS

Latest information on forthcoming events both in the U.K. and abroad is given below. Further details are obtainable from the addresses in parentheses.

LONDON

Jan. 16-20	**Physical Society Exhibition** (Exhibition Secretary, 1 Lowther Gardens, S.W.7.)	R.H.S. Halls
Mar. 8	**Public Address Exhibition** (A.P.A.E., 394 Northolt Road, South Harrow, Middx.)	King's Head, Harrow
Mar. 21-25	**Electrical Engineers Exhibition** (A.S.E.E. Exhibition Ltd., Museum House, Museum Street, W.C.1.)	Earls Court
Apr. 5-7	**Electrical Contacts Symposium** (The Institute of Physics and the Physical Society, 47 Belgrave Square, S.W.1.)	Brunel College
Apr. 6-9	**Audio Festival and Fair** (C. Rex-Hassan, 42 Manchester Street, W.1.)	Hotel Russell
Apr. 20-21	**Television and Film Techniques Convention** (Television Society, 166 Shaftesbury Avenue, W.C.2.)	Savoy Place

Apr. 20-May 4	**Engineering, Marine, Welding and Nuclear Energy Exhibition** (F. W. Bridges & Sons, Grand Bldgs., Trafalgar Sq., W.C.2.)	Olympia
May 30-June 2	**Components Exhibition** (R.E.C.M.F., 21 Tothill Street, S.W.1.)	Olympia
June 12-17	**Components and Materials used in Electronic Engineering (Conference)** (I.E.E., Savoy Place, W.C.2.)	Central Hall
June 21-July 1	**INTERPLAS, International Plastics Exhibition and Convention** (*British Plastics*, Dorset House, Stamford Street, S.E.1.)	Olympia
July 7-29	**Soviet Trade Fair** (Industrial & Trade Fairs Ltd., Drury House, Russell Street, W.C.2.)	Earls Court
Sept. 6-8	**Microwave Measurement Techniques Conference** (I.E.E., Savoy Place, W.C.2.)	Savoy Place
Oct. 4-12	**Computer Exhibition and Symposium** (E.E.A., 11 Green Street, W.1.)	Olympia
Nov. 8-10	**Non-Destructive Testing in Electrical Engineering (Conference)** (I.E.E., Savoy Place, W.C.2.)	Savoy Place
Nov. 13-18	**Factory Equipment Exhibition** (Industrial & Trade Fairs Ltd., Drury House, Russell Street, W.C.2.)	Earls Court
FARNBOROUGH		
Sept. 4-10	**Farnborough Air Show** (Society of British Aircraft Constructors, 29, King Street, London, S.W.1.)	
NEWCASTLE		
Feb. 28-Mar. 2	**North East Electronic Engineering Exhibition** (Secretary N.E.E.E.E., c/o N.E.I.D.A., 9 Eldon Square, Newcastle-upon-Tyne 1.)	
OXFORD		
July 5-9	**Communications and Space Research Convention** (Brit. I.R.E., 9 Bedford Square, London, W.C.1.)	
OVERSEAS		
Jan. 9-11	**Reliability and Quality Control Symposium** (R. Brewer, G.E.C. Research Laboratories, Wembley, Middx.)	Philadelphia
Feb. 15-17	**International Solid State Circuits Conference** (J. J. Suran, General Electric Co., Syracuse.)	Philadelphia
Feb. 17-21	**International Components Exhibition** (Fédération Nationale des Industries Électroniques, 23 rue de Lubeck, Paris XVIe.)	Paris
Feb. 20-25	**International Symposium on Semiconductors** (Fédération Nationale des Industries Électroniques, 23 rue de Lubeck, Paris XVIe.)	Paris
Mar. 9-14	**International Hi-Fi and Stereo Exhibition** (Fédération Nationale des Industries Électroniques, 23 rue de Lubeck, Paris XVIe.)	Paris
Mar. 20-23	**I.R.E. National Convention** (Dr. G. K. Teal, I.R.E., 1 E.79 St., New York 21.)	New York
Apr. 30-May 9	**German Industries Fair** (Schenkers Ltd., 13 Finsbury Square, London, E.C.3.)	Hanover
May 2-4	**Electronic Components Conference** (I.R.E., 1 E. 79 St., New York 21.)	San Francisco
May 9-17	**Measurement, Control, Regulation and Automation Exhibition and Conference** (MESUCORA, 40 rue du Colisée, Paris 8.)	Paris
May 19-June 4	**British Trade Fair** (Industrial & Trade Fairs Ltd., Drury House, Russell Street, London, W.C.2.)	Moscow
May 22-24	**National Telemetering Conference** (I.R.E., 1 E. 79 St., New York 21.)	Chicago
May 22-24	**Global Communications Symposium** (I.R.E., 1 E. 79 St., New York 21.)	Chicago
May 23-25	**Large Capacity Computer Memories Symposium** (Miss J. Leno, Office of Naval Research, Washington 25, D.C.)	Washington
June 26-July 1	**International Measurement Conference** (Prof. J. F. Coales, The University, Cambridge.)	Budapest
June 28-30	**Joint Automatic Control Conference** (Dr. R. Kramer, M.I.T., Cambridge 39, Mass.)	Boulder
July 16-22	**Medical Electronics Conference** (Dr. H. P. Schwan, School of Electrical Engineering, University of Pennsylvania, Philadelphia)	New York
Aug. 1-12	**International Sydney Trade Fair** (Industrial & Trade Fairs Ltd., Drury House, Russell Street, W.C.2.)	Sydney
Aug. 22-25	**Western Electronics Show and Convention** (Wescon, 1435 LaCienega Blvd., Los Angeles.)	San Francisco
Aug. 25-Sept. 3	**German Radio Exhibition** (Berliner Ausstellungen, Charlottenburg 9, Berlin.)	Berlin
Sept. 11-15	**International Cybernetics Congress** (International Association of Cybernetics, 13 Rue Basse-Marcelle, Namur, Belgium.)	Namur
Oct. 9-11	**National Electronics Conference** (N.E.C., 228 N. LaSalle St., Chicago.)	Chicago

TWO USEFUL AMPLIFIERS

Model B100

Transistorised Amplifier for 12 volt operation. Output 12 watts. Inputs for microphone and music. Minimum battery consumption—maximum efficiency.

Model GP100

AC operated general purpose high quality Amplifier. 4-way Input Selector—Bass and Treble controls. 10/12 watts output.

Full details available on request

TRIX

THE TRIX ELECTRICAL CO. LTD.
1-5 MAPLE PLACE, LONDON, W.1
Tel.: Museum 5817 (6 lines)
Grams: Trixadio Wesdo London

RANDOM RADIATIONS

By "DIALLIST"

Good Shot, Sir

JUST how electronic translating machines work I don't know; but work they certainly do, as is shown by the number now in use. There's no polished prose about their translations, which are more or less literal. Their vocabulary is necessarily somewhat limited, but they undoubtedly serve a most useful purpose by making books and articles understandable to people who don't know a word of the language in which they're written. Sometimes the machine is completely baffled by words which aren't in its vocabulary; but it always has a shot—and a pretty good one too as a rule. One machine kept on writing "water sheep" in the course of a translation on which it was engaged. The words occurred again and again. At first their meaning was dark to the mind of the would-be reader. Then light dawned. What it had been trying to set down was "hydraulic ram"!

Tiros II

THE latest American satellite, Tiros II, started to do useful work very soon after it had been launched. One of its jobs is to televise pictures of cloud formations back to earth and this it is doing most satisfactorily. It travels in an almost circular orbit a little over 400 miles aloft and enables a kind of weather forecast map to be made for all the areas within its range. It will thus become possible to track hurricanes with great accuracy. The satellite, besides carrying two television cameras, also has seven infra-red detectors for measuring the heat reflected from the earth, which again provides information about the gathering and the advancement of severe storms. The chief of the U.S. Weather Bureau says that information such as Tiros II sends to earth could have saved thousands of lives lost in the recent tidal waves in Pakistan. This satellite is the forerunner of the complete weather system "Nimbus" which is planned for 1962.

Underwater TV

ONE of the many interesting items shown at the recent Industrial Photographic and Television Exhibition was the latest model of the Marconi-Siebe Gorman underwater television camera. It can be so adjusted that it is almost weightless and can be carried by a diver, but it can also be lowered from the surface. The camera will be used by the North of Scotland Hydro-Electric Board chiefly to examine the big protective grilles (some 120ft below the surface) which prevent young salmon and other fish being carried into the turbines. Experiments have shown that at considerable depths and in water that is far from clear the TV camera can "see" a good deal better than a diver. The equipment will also be used for investigating fish life and behaviour in the various lochs. Closed-circuit TV has already become an invaluable aid to many branches of science and industry and new uses are always being found for it.

Scaring 'em Off

STARLINGS are a major menace on aerodromes used by jet planes. A recent appalling crash was almost certainly caused by their being sucked into the intakes of the engines and another disaster was averted by the presence of mind of a pilot who saw flocks of them as he was taking off and switched off his engines. Feathers and bits of starling were later found in the intakes. How to get rid of starlings is a real problem and so far it has proved baffling. A new approach to finding a solution is being made by the Ministry of Aviation in conjunction with the Trix Electrical Company. It consists in making hi-fi recordings of the alarm calls of starlings and other birds which frequent airfields and transmitting them from strategically placed loudspeakers. It is said to have given very promising results during the experimental stages. And it's not only aviation people who are interested in large-scale bird scaring. Farmers, fruit growers and others who suffer from damage to their crops would have a ready welcome for a system proved to be successful. And so, one imagines, would authorities in London, Birmingham and other cities in which huge flocks of starlings arrive to roost every evening.

TV in N.Z.

AT the moment I think I'm right in saying that New Zealand has only one television station in action, the 500-W experimental transmitter in Auckland. Three others, though, should be at work early this year. These are to be 5-kW stations at Christchurch, Wellington and Dunedin. All the equipment, except the aerials, which are to be supplied by the New Zealand Broadcasting Service, will be made in this country by

"WIRELESS WORLD" PUBLICATIONS

	Net Price	By Post
CORRECTING TELEVISION PICTURE FAULTS. John Cura and Leonard Stanley. 4th Edition	4/-	4/6
ELECTRONIC COMPUTERS: Principles and Applications. T. E. Ivall. 2nd Edition	25/-	26/-
INTRODUCTION TO LAPLACE TRANSFORMS for radio and electronic engineers. W. D. Day, Grad.I.E.E., A.M.Brit.I.R.E.	32/6	33/6
MICROWAVE DATA TABLES. A. E. Booth, M.I.R.E., Graduate I.E.E.	27/6	28/8
FOUNDATIONS OF WIRELESS. M. G. Scroggie, B.Sc., M.I.E.E.	16/-	17/4
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 4th Edition	30/-	31/9
THE OSCILLOSCOPE AT WORK. A. Haas and R. W. Hallows, M.A. (Cantab), M.I.E.E. ..	18/-	19/-
WIRELESS SERVICING MANUAL. W. T. Cocking, M.I.E.E. 9th Edition	17/6	18/8

A complete list of books is available on application.
Obtainable from all leading booksellers or from
ILIFFE BOOKS LTD., Dorset House, Stamford Street, London, S.E.1

Marconi's. It's going to be a difficult task to cover the whole of that mountainous country as the system grows and it'll certainly take some time to complete.

Talking Books

OURS is, I believe, the first country to introduce books recorded on tape for the blind. An entirely novel feature of the new Talking Book machine being introduced by the National Institute for the Blind is a tape cassette containing two spools mounted one above the other and also housing and protecting the playback head. Half-inch tape is used, the 18 tracks recorded on it provide up to 20 hours of playing time. Near the end of each track the user is warned and all that he has to do to start on the next track is to turn over the cassette and press a button. And there are safety devices to prevent damage. The new tape equipment will gradually replace the disc machines now in use. Assistance in installing and servicing the machines is needed from volunteers in most parts of the country. Any reader who is able and willing to give it should write to: E. Read-Jones, Manager, Nuffield Talking Book Library for the Blind, Mount Pleasant, Alperton, Wembley, Middx. Offers will be most warmly appreciated.

A Long Time Coming

IT appears that we are to adopt the metric system for some purposes, at any rate. The old and quite outdated apothecaries' weight, with its scruples and drams and that sort of thing, is to be replaced fairly quickly by the metric system of weights. Scientists have, of course, largely adopted metric methods already and they're widely used in wireless. No one would now dream of expressing a wavelength in yards, feet and inches. But we've been as a country a very long time in making up our minds to discard our antiquated weights and measures in favour of the more sensible system. Some of our units are just nonsensical: why, for instance, are there 112 lbs in a *hundred*weight? I suppose that originally it deserved its name by consisting of 100 pounds; then the extra twelve were added for good measure. Now that they're about to adopt decimal coinage in the Antipodes I hope we shan't be long in following their lead. The metric system would save an immense amount of the time spent now in intricate calculations.

MAINS CONNECTORS

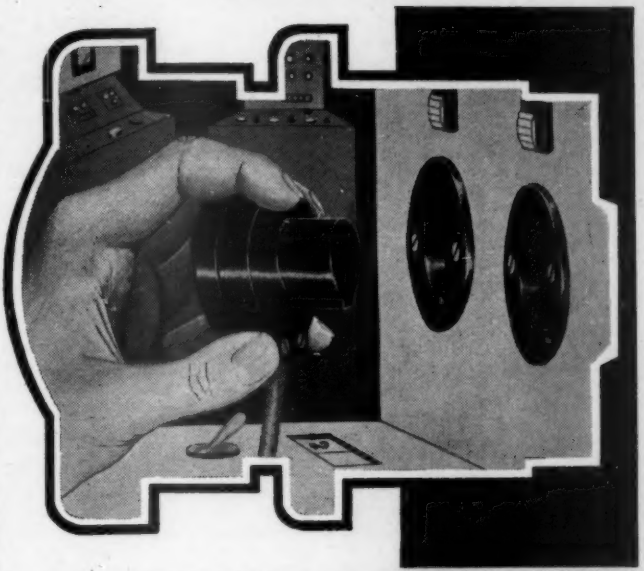

For reliable connection at all times, specify Bulgin Mains Connectors. The design and manufacture of these components, and the intensive research and testing ensures that every model leaving our factory will give perfect mating and electrical performance at all times.

We illustrate on the right two of our extensive range of **392 different varieties.**

Our **P.73** one-hole-fixing model, non-reversible in mating and keyed to fit panels preventing rotation in use; Electrical rating: 3 Amps at 250 Volts or 1 Amp at 500 Volts. Also our **P.430** as above but with Electrical rating 5 Amps at 250 Volts.





Our 164-page technical catalogue published in **MARCH, 1960,** contains illustrations, full working details and dimensions of over **10,000 ELECTRONIC COMPONENTS.** Send for catalogue 201/C. Price 2/6 post free, or free to trade letterhead or order.

"THE CHOICE OF CRITICS"

BULGIN

A. F. BULGIN & CO. LTD., BYE-PASS ROAD, BARKING, ESSEX

Telephone: RIPpleway 5588 (12 lines)

UNBIASED

BY "FREE GRID"

Exhibitiana

I HEAR the organizing committee is already holding meetings to discuss plans for the 1961 National Radio Show. If the committee has not advanced too far with its plans, I do hope it will consider making an innovation which I think would be welcomed by many.

My suggestion is that in addition to the individual exhibitors' stands, to which we are all accustomed, there should be special stands on which is grouped equipment of a like kind by all exhibitors. Thus I should like to see a stand on which there was nothing but tape recorders of all makes, another stand where there were shown all the available transistor midget sets, and so on.

At present if anybody wishes to examine the various types of tape recorders or other things before making a choice, it is necessary to go to umpteen stands which may be widely separated. It is, in fact, necessary to use tooth and claw, or at any rate, elbows and umbrella, to fight one's way through dense crowds of people who seem to have come to the show with the sole purpose of getting in the way of those who, like myself, have come with a serious purpose.

A splendid example of the usefulness of the grouping of exhibits in the manner I suggest was shown in the pages of our associate journal *Amateur Photographer* in its report of the world-famous biennial Photokina exhibition at Cologne. Although none of the stands at this exhibition were actually grouped in the manner I have suggested, the Editor of *Amateur Photographer* considered the interests of his readers by treating the stands as though they were so grouped. Thus, instead of a stand-to-stand report, he gave what I will call a group-by-group one.

Doubtless I shall be told that at Earls Court there is no room for these "group" stands. That is, of course, utter nonsense as can be seen from the accompanying photograph I myself took of one of the empty spaces in the gallery at last year's show.

[Logically, "Free Grid's" scheme would require additional floor area comparable with that at present allocated to firms' stands. Anything very much less would call for selection (by whom?) of representative exhibits. —Ed.]

Unwitting Offence

WE are often told that ignorance of the law is not a good defence if one is charged with a breach of it. But I have sometimes wondered if that would hold good in all circumstances. The thing which has brought this matter to my mind once more is the case recently reported in the Press of a young lady driving her invalid chair who, late at night, found her vehicle stuck in the mud in a rather lonely spot.

Because of a disability she was unable to get out of the chair and so was faced with the possibility of spending the night in this position. She remembered what she had been taught in the Girl Guides and endeavoured to attract attention by sounding on her electric horn the international distress signal in morse. She naturally expected the sound to reach the ears of some passer-by.

What actually happened was that her signals appeared as long and short flashes on the screen of a television set in a house not very far away. After a time the viewers realized that what they saw was a deliberate signal and when they went outside the house to consult the neighbours they could hear the actual sound of the horn although its signals were very faint.

The lady's rescue was obviously due to the fact that the radio signals she unwittingly sent out were picked up. Even had she known that the mechanism of the electric hooter formed a short-range spark transmitter, and had deliberately used it as such, it is hardly likely that any proceedings would have been taken against her, although it would certainly have been a technical offence as she had no transmitting licence.

Personally speaking, this incident has taught me a lesson and I intend to make provisions for the connection of my horn mechanism to my car-radio aerial so that I can send out a signal for help if I ever break down on a lonely road in evening broadcasting hours. I think that by making this provision I shall be guilty of establishing a radio transmitter even though I never have occasion to use it. I shall await with interest the service of a summons.

It is high time, I think, that all cars were equipped with short-range transmitters and all A.A. and R.A.C. 'phone boxes with receivers and other apparatus to enable an emergency call to be put through to the nearest depot of the motoring organizations. I have bitter memories of having to walk over two miles one stormy night to the nearest 'phone box after I had broken a half-shaft.

I Smell, You Stink

THE words in the title of this note are, of course, those used by Dr. Johnson when he was trying to teach good English to somebody who seemed to think that the verb "to stink" was merely a cacophonous vulgarism for "to smell." As the good doctor explained, the first verb in my title could only be used of the person at the receiving end of an olfactory system, and the last verb only of the person at the transmitting end.

I mention this as I think it is high time we had another Dr. Johnson to rebuke the B.B.C. for the misuse of words which it permits its announcers to make. For instance, the word "nostalgia" used to mean homesickness but the B.B.C. announcers—and in particular the ladies—seem to have changed all that. When they use the adjectival form of it, as they so often do, they seem to regard it as a synonym for reminiscent, sentimental, or half a dozen other things.

There are many other instances of this sort of thing, and I don't think Dr. Johnson would have allowed the B.B.C. the same poetic licence which he granted to Shakespeare. As the good doctor is no longer with us, could not A. P. Herbert or Eric Partridge be persuaded to undertake the task of preparing for us a dictionary of B.B.C. misusages.

Television history was made at night, at 10 p.m. to be exact, when a 45-second "live" Commercial was flashed across Europe from race-track to the screens of Britain's TV network within four hours of Stirling Moss winning the Monaco Grand Prix.

A telephone interview with the winning driver was recorded over land lines from Monte Carlo to the A.B.C. Studios, while photographs were wired to Fleet Street and rushed by motor-cycle to Teddington.

For permission to reproduce this picture of the editing of the interview we are indebted to The Dunlop Rubber Company Limited and Charles F. Higham Limited, their Advertising Agents, and to A.B.C. Television Limited, in whose Teddington Studios the photograph was taken.

Evidence in Camera



Of interest not only for its story, this picture has provided (quite unintentionally) striking evidence of the reputation enjoyed by LEAK. It is a typical incident of the use of LEAK equipment by professional audio engineers in broadcasting and recording studios throughout the world, who choose LEAK for quality of performance and reliability. Does *your* installation measure up to these standards? If it does not, your LEAK Dealer can help you. The prices of LEAK studio quality equipment are made possible only by world-wide sales.

The new LEAK Varislope Stereo pre-amplifier (illustrated above) incorporates facilities which make it the most comprehensive pre-amplifier presently available.

PRICE £25

We shall be pleased to send you a copy of Thomas Heinitz' review of this "Remarkable new control unit for stereo" reprinted from "Records and Recording."

Whether you are for Monaural or Stereo, LEAK equipment offers you the best of either. These suggestions may help you.

Monaural	Stereo
Varislope III Pre-Amplifier	Point One Stereo Pre-Amplifier
TL/12 Plus Power Amplifier	Stereo 20 Power Amplifier
Southdown Cabinet.	Southdown Cabinet
Total £55 13 0	Total £72 9 0

Ask your Dealer or write to us for brochures

LEAK the first name in High Fidelity

H. J. LEAK & CO. LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, LONDON, W.3

Telephone: SHEpherds Bush 1173. Telegrams: SINUSOIDAL, EALUX, LONDON

FERRANTI

TECHNICAL HANDBOOK

silicon

SEMICONDUCTOR DEVICES

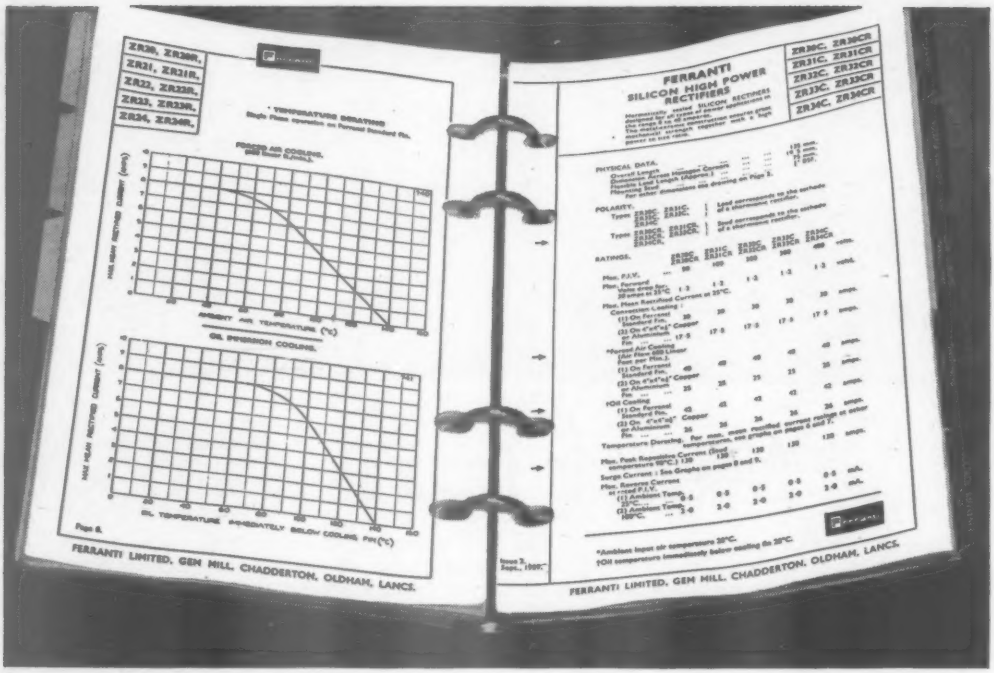

Available on a subscription basis at a cost of £1. 0. 0. the Ferranti Technical Handbook provides data on ratings, typical operating conditions, performance curves and physical details. It also provides information regarding the physics, installation, cooling and protection circuitry for low current and miscellaneous diodes, power rectifiers, switching diodes, voltage reference diodes, voltage variable capacitors, low current transistors, power transistors and photocells.

FERRANTI LTD · GEM MILL · CHADDERTON · OLDHAM · LANCS Tel: MAin 6661. London Office: Tel. TEMple Bar 6666

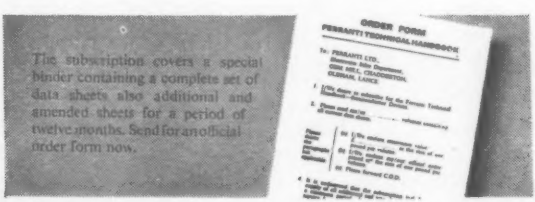
The subscription covers a special binder containing a complete set of data sheets also additional and amended sheets for a period of twelve months. Send for an official order form now.
ORDER FORM
FERRANTI TECHNICAL HANDBOOK

PE 190

Crystal Mike by Acos

Model 39/1, this is ideal for tape or general amplifiers, complete with screened lead 39/6, plus 1/- post.

Speaker Bargain

12in. Hi-fidelity loudspeaker. High flux. Permanent magnet type with standard 3 ohm speech coil. Will handle up to 12 watts. Brand new by famous maker. Price 32/6, plus 3/6 post and insurance.

TV Workshop Aids

E.H.T. SEALER. Apply with soldering iron. Stops corona discharge, etc. 2/6 per stick.

POLYTHENE TAPE. 2in × 10 thou. for E.H.T. insulation up to 25 kV. 5/- per 12ft. roll.

SPONGE STRIP. ½in. × ½in. For sealing or cushioning. 9d. per 6ft.

ANTI-STATIC SCREEN CLEANER. For TV tubes and screens. Perspex or glass. Delays accumulation of dust. 3/- per tube.

CELLULOSE CEMENT. Specially prepared for radio gluing of metal, glass, ceramic wood, fabrics, 4/6 per tin.

Morganite Potentiometers

Single and 2-gang types available, standard size with good length spindle, all new and boxed. Single types, 1/- each, values available: 5K, 25K, 50K, 50K, 100K, 250K, 1 meg., 2 meg. Gang type, 3/- each, values available: 5K ± 5K, 100K ± 100K, ½ meg. ± ½ meg., 2 meg. ± 2 meg.

Hi-Fi Snip Infinite Wall Baffle

Nicely veneered and polished. Corner fitting (attaches to picture rail). Takes up no floor space. Gives really fantastic results with only low-price 8in. speaker Fitting for tweeter. Only 45/- each. carriage and insurance 2/6.

THIS MONTH'S SNIP

Transistor Portable/Car Radio undoubtedly one of the best superhet Transistor Sets being offered in component form with printed circuits and very easy to follow instructions for alignment—service facilities should you get into difficulties with construction or alignment. Uses six first grade Transistors giving a 500 MW push-pull output, full tuning over medium and long waves from internal ferrite aerial but with car aerial attachment. Slow motion and fine tuning. high flux elliptical speaker complete with fine 2 tone cabinet. Offered this month only!

Special introductory price of £8/19/6. 7/6 post and insurance.

TRANSISTOR LOUDSPEAKER RADIOS

RESULTS GUARANTEED. Nothing can be more disappointing than to find that despite care in making up, your little radio just will not work. This is unlikely to happen with our set, but if it does, you may send it in for service, we guarantee good results.



TWO MODELS.

Pocket 4 uses three transistors and one diode and has refinements for receiving weak stations, price 55/6.

Every set complete to last nut and bolt, with proper case, tuning condenser and miniature loudspeaker.

Our sets do not need aerials, also they may be built in stages to car radio output.

Pocket 5 uses 4 transistors approx. 3 times out put with better tone, price 67/6. Post and insurance 2/6.

PHILIPS TRANSCRIPTION UNIT

Philips AG 2009 Record Player, 4 speed, ideal for the enthusiast. Pick-up arm wired for stereo fine adjustment on all four speeds. Continuously variable pick-up weight (2.12 gms.) Supplied with Philips Hi-Fi crystal type AG3019 for micro-groove and 78 r.p.m. Frequency response 30-15,000 c/s Pick up lifting and lowering device. Individually balanced heavy turntable. Muting switch. Can be used with any amplifier or radio set. Complete with monaural pick-up £10/10/0 or 2 Gns. deposit and 20 fortnightly payments of 10/-. Available also with stereo head, diamond or sapphire stylus. Prices on request.

THE TAYLOR METER MODEL 127A

A pocket size meter but with a big scale and a sensitivity of 20,000 Ohms per volt D.C., therefore an ideal unit for television servicing—robustly made and complete with leads and prods—20 ranges as follows:

D.C. current 50 micro-amps, to 1 amp.

D.C. voltages—0-1,000 volt in seven ranges (25 KV with external probe, optional extra).

Volts A.C.—0-2,500 in six ranges.

Ohms—0-20 meg. Ohm in three ranges (self-controlled) Self-contained 2½in. movement. Price £10 or 10/- deposit and 23 fortnightly payments of 10/-. Non-callers add 5/- carriage and insurance.

COMPONENTS FOR TRANSISTOR SETS

Parts for "Practical Wireless" Pocket Transistor Radios available. Send for lists.

Sub-miniature Electrolytics. 1 mfd. 18v., 2.5 mfd. 6v., 4 mfd. 6v., 8 mfd. 6v., 5 mfd. 12½v., 10 mfd. 6v., 25 mfd. 6v., 50 mfd. 3v., 80 mfd 3v., 200 mfd. All 1/9 each.

Transistor Ferrite Rod Aerial with medium and long wave coils with circuit. Price 7/6.

Oscillator Coil and set of 2 I.F.transformers for transistor set with circuit. Price 23/6.

Midget 2in. P.M. Loudspeaker for transistor set. 3 ohm or 80 ohm coil. Price 15/6.

Midget 365 pF + 178 pF two-gang Tuning Condenser with trimmers, ¼ spindle drilled and tapped. Price 9/-, plus 1/- post.

Push-pull Output Transformers, for transistors OC78, etc. Sub-miniature. Price 8/6, plus 1/- post.

Push-pull Input Transformer to match above Output Transformer 8/6.

0.0005 mfd. Single Tuning Condenser. Solid di-electric ¼in. spindle for transistor or crystal set. 3/9; ditto with spindle tapped 6 B.A. 4/-.

Transistors tested. Set of six for Superhet includes matched pair, Mullard £3/10/0, ditto unbranded, 45/-; suitable as mixers, 9/6 each. Suitable as I.F. amplifiers, 8/6; suitable for R.F. and Regen. circuits, 6/6; matched pairs for Push-pull Output, 16/- per pair. High gain for single ended output. 7/6. Ordinary white spot, 3/9; red spot, 3/6.

Resistors, miniature quarter watt type for transistor sets. All popular values, 5d. each.

Miniature ceramic condensers 6d. each.

Transistor Set Cabinet

Very modern cream cabinet, size 5½ × 3 × 1½ in. with chrome handle tuning knob and scale. Price 7/6, plus 1/6 postage and packing.

INFRA RED HEATERS

These latest type heaters are ideal for bathroom, kitchen, bedroom, etc. They are simple to make from our easy to follow instructions—uses silica enclosed elements designed for the correct infra-red wavelength (3 microns). Price for 750-watt element and instructions, 15/6 plus 2/6 post and insurance. Or made-up heater, 52/6, plus 2/6 post and insurance—fully tested and guaranteed.

Connecting Wire

P.V.C. covered in 100ft. coils—2/9 a coil or four coils different colours, 10/- post free

Rectifier Bargains



Selenium rectifier type 12, 500 v. ½ A. half-wave, easily rebuilt into full wave or multiple type, contains 20 35 mm. discs. Price 8/6, plus 1/6 post. Type 13. 36 volt 9 amp. easily rebuilt into six full wave charger rectifiers suitable for 6 or 12 volt batteries. 3 amps, contains 24 64 mm. discs. Real bargains at 19/6, plus 1/6 post.

Band III Converters

Suitable Wales, London, Midland, North Scotland, etc., All the parts, including 2 EF80 valves, coils, fine tuner, contrast control, condensers and resistors (Metal case available as an extra). Price only 19/6, plus 2/6 post and insurance. Data free with parts or available separately, 1/6. **Please send two more kits, the one you sent last week is performing magnificently.** We receive this sort of letter every day of the week, so if you have hesitated because you thought our kits too cheap you need hesitate no longer.

Miniature Microphone

American made. Dynamic type, real bargain at 2/6, plus 6d. postage.

Building A Scope?

3in. oscilloscope tube. American made type No. 3FP7, octal base 6.3 v. .6 amp. heater, electrostatic deflection, brand new and guaranteed, with circuit diagram of scope, 15/- each, plus 1/6 post and insurance.

Wrap our heater wire (blanket wire) around the pipes in your loft, to prevent freeze-ups Complete blanket wire suitable for up to 50ft. of pipe 10/- post free. With instructions.

ELECTRONIC PRECISION EQUIPMENT, LTD.

post orders are dealt with from Eastbourne, so for prompt attention please post your orders to 66 Grove Road, Eastbourne, marked Department 2. Callers may use any one of the Companies below.

Electronics (Croydon) Ltd.,
246 London Road,
Croydon.
Phone: CRO 6558.
Half day, Wednesday

Electronics (Finsbury Park), Ltd.,
29 Stroud Green Road,
Finsbury Park, N.4.
Phone: ARChway 1049
Half day, Thursday

Electronics (Manor Park) Ltd.
520 High Street North,
Manor Park, E.12.
Phone: ILFord 1011
Half day, Thursday

Electronics (Ruislip) Ltd.,
43-46 Windmill Hill,
Ruislip, Middx.
Phone: RUISLIP 5780
Half day, Wednesday

PUBLI-SERVICE - PARIS

SALON INTERNATIONAL DES COMPOSANTS ÉLECTRONIQUES

IN PARIS
PORTE DE VERSAILLES
from 17th
to 21st
February,
1961

4TH

INTERNATIONAL EXHIBITION OF ELECTRONIC COMPONENTS

the greatest world meeting in the field of electronics.

FÉDÉRATION NATIONALE DES INDUSTRIES ÉLECTRONIQUES

23, rue de Lübeck - Paris 16e - Pas. 01.16

SPONSORED BY THE FÉDÉRATION NATIONALE DES INDUSTRIES ÉLECTRONIQUES

INTERNATIONAL SYMPOSIUM ON SEMI CONDUCTOR DEVICES

and organized by the Société Française des Electroniciens et des Radio-Electriciens

UNESCO BUILDING - PARIS
125, AVENUE DE SUFFREN

FROM 20TH TO 25TH FEBRUARY, 1961.

AUTOMATIC CABLE TESTER

TYPE LM. 104



Multicore Cables and Harnesses such as are used extensively in aircraft, marine and similar installations can be easily checked for correctness of wiring and conductor resistance by means of the Automatic Cable Tester. With electrically operated special switches automatic checking of Multicore Cables up to 69 cores may be carried out at a rate much faster than is normally possible by manual means. Coupled to this is the absolute certainty that no conductor is accidentally left out of the test. "SELF TEST" means are included.

KENURE, HOLT ELECTRONICS LTD.
BOYN VALLEY ROAD, MAIDENHEAD
BERKSHIRE
Telephone Maidenhead 5331-2-3

Grampian DP4

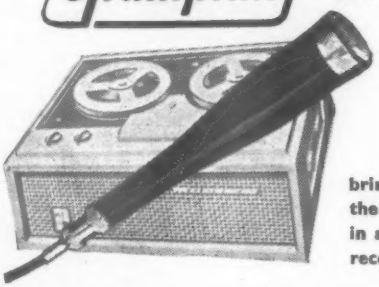

brings out the best in any recorder

Even the most expensive recorder will only give its best performance if a good quality, reliable microphone is used.
In the DP4, with a uniform wide frequency response from 50 c/s to 15,000 c/s, Grampian have developed an outstanding, moderately priced instrument which will please the most exacting recordist.
The DP4 is equally suitable for Public Address, Broadcasting, Call Systems, etc.
Output Levels—DP4/L low impedance—25 ohms 86 dB below 1 volt/dyne/CM². DP4/M medium impedance—600 ohms 70 dB below 1 volt/dyne/CM². DP4/H high impedance—50,000 ohms 52 dB below 1 volt/dyne/CM².
Retail Price—DP4/L complete with connector and 18ft. screened lead £7 11 0
(Medium or High Impedance models ..... £1 extra)
A complete range of stands, swivel holders, etc., is available also. A matching Unit (Type G7) can be supplied for adapting the microphone for a Recorder having a different input impedance, or when a long lead is required. ..... Retail Price £3 5 0

Write or telephone for illustrated literature.

GRAMPIAN REPRODUCERS LIMITED
Hanworth Trading Estate, Feltham, Middlesex Feltham 2657

supreme in performance · stability · consistency

Years of research, still continuing, are behind the brilliant, versatile range of Magloy magnets offered by Preformations Limited. Exceptional characteristics are due to the use of special precipitation hardened alloys treated by the most advanced methods known in magnet technology. The extensive manufacturing resources of Europe's most up-to-date magnet foundry assure positive advantages for all users. Applications are legion—Magloy magnets satisfy the most stringent requirements in electronics, engineering and domestic equipment.

Preformations Limited offers a unique design engineering service and will undertake the research necessary for the development of special magnets to meet specific requirements. Write for the Magloy brochure—on company headed notepaper please.

MAGLOY CAST PERMANENT MAGNETS

Preformations Limited

ONE OF THE Plessey GROUP OF COMPANIES

CHENEY MANOR · SWINDON · WILTS
Telephone SWINDON 6251 · Telex 44-385

P.M.1

P.O. TYPE 3000

THE MOST VERSATILE RELAY AVAILABLE TODAY!

- Built to specification.
- Contacts 300mA. to 8 amps.
- Insulation up to 5 KV.
- Mechanical latches fitted for positive holding, local or remote manual release.
- Quotations by return of post.
- Prototypes within 48 hours.

UNISELECTORS
Supplied to Specification
TWO to TEN BANK

KEYSWITCHES



A REASONABLE RANGE KEPT IN STOCK

Others delivered within a few days.

Also stocks of relays as follows :—

High Speed, polarised, miniature sealed and open, A.C. for any voltage and P.O. type 600 to specification.

Jack Davis (Relays) Ltd.
(DEPT. W.) TUDOR PLACE, LONDON, W.1
TELEPHONES: MUSEUM 7960 — LANGHAM 6821

MANY MORE PEOPLE ARE USING

C. G. S.

VITREOUS ENAMELLED WIREWOUND RESISTORS

RCSC Style	CGS Style	Rating in watts		Range
		RCSC	Commercial	
—	VPF1	1.5	2	0.5Ω to 5KΩ
RWV4-J	VPF4	3	4	0.5Ω to 15kΩ
RWV4-K	VPF10	4.5	10	1Ω to 68KΩ
RWV4-L	VPF14	6	14	1Ω to 100kΩ

- R.C.S.C. Type Approved, 10Ω to 100KΩ.
- 100% test and inspection.
- Continuous batch sampling to R.C.S.111.
- Guaranteed reliability.
- Competitively priced.

Ask for price lists

THE C.G.S. RESISTANCE CO. LTD

MARSH LANE, GOSPORT STREET, LYMINGTON, HANTS.
Tel. Lymington 2811.
London Office: 30 Clarendon Rd., Harrow, Middx. Tel. Harrow 4147

MINIATURE ELECTRIC BULBS
FROM 1V to 50V
IN SIZES FROM 4.5mm to 18mm DIAMETER

After nearly 30 years of specialising solely in the production of Miniature Electric Lamps, we have accumulated a store of information that is freely available to the Electronics Industry. You are invited to write or phone us for any information you may require about Miniature or Sub Miniature Filament Lamps for use in existing or new projects.

VITALITY BULBS LTD.

Neville Place, Wood Green, London, N.22. 'Phone: BOWes Park 0016

SOUTHERN TECHNICAL SUPPLIES
TRANSFORMERS FOR ALL MULLARD AMPLIFIERS

OUTPUT TRANSFORMERS (Secondaries for 3.75 and 15 ohms)
T.44. 5-10 amp. ultra linear, 6,000 ohms. 43% tappings 30/-. P/P. 2/-.
T.102. 5-10 amp. and Osram 912, 6,600 ohm. 20% tappings. 30/-. P/P. 2/-.
T.100. 5-10 amp. LOW loading, 6,000 ohm. 28/-. P/P. 2/-.
T.142. 7 watt stereo amp., 9,000 ohm. 20% tappings, 28/-. P/P. 2/-.
T.140. 3 watt amp. type A tape amp., 3 watt stereo, 5,000 ohm. 19/-. P/P. 1/6.
MAINS TRANSFORMERS (Primaries 200-220-240; 0-10 v. 50 c/s.)
T.55 5-10 amp. and tuner, 300-0-300 v., 120 mA, 6.3 v. 2.5 a., 6T., 6.3 v. 2.5 a., 6.3 v. 1 a., 32/-. P/P. 2/6.
T.56. 5-10 amp. 300-0-300 v. 100 mA, 6.3 v. 2.5 a., 6T. 6.3 v. 1 a., 27/-. P/P. 2/6.
T.101. Two 5-10 amp. Low loading, 300-0-300 v., 150 mA, 6.3 v. 4 a., 6T., 6.3 v. 1 a., 34/-. P/P. 2/6.
T.143. 7 watt stereo 250-0-250 v., 150 mA, 6.3 v. 4 a. 6T., 6.3 v. 1 a., 33/-. P/P. 2/9.
T.141. 3 watt 300-0-300 v., 60 mA, 6.3 v. 1 a., 6T., 6.3 v. 1 a., 22/-. P/P. 2/-.
T.163. 2 watt stereo 250-0-250 v., 80 mA, 6.3 v. 2 a. 6T., 6.3 v. 1 a., 25/-. P/P. 2/6.
T.A. Trans. and Rectifier. 270 v. D.C. 100 mA, 6.3 v. 6T., 3 a., 32/-. P/P. 2/-.
T.B. Trans. and Rectifier. 270 v. D.C. 60 mA, 6.3 v. 6T., 2 a., 25/-. P/P. 2/-.
All transformers fully guaranteed, all shrouded fully except T140 and T8. Write for our fully illustrated catalogue, with all data.
SPECIAL OFFERS T44 and T55. 59/-; T143 and two T142's, 82/-. P/P. 3/6 on both.
Mullard's latest Publication detailing the complete range, "CIRCUITS FOR AUDIO AMPLIFIERS." 2/6. P/P. 1/-.

SOUTHERN TECHNICAL SUPPLIES, 83 Station Road, Portslade, Sussex

LOUDSPEAKER UNITS



Model 121 12" HD UNIT

Dia. over lugs 13¼in.; Overall depth 6¼in.; Power handling 20 watts R.M.S.; Voice coil dia. 3in.; Flux density 13,000 gauss; Total flux 100,000 lines; Main resonance 30/35 c.p.s.; Frequency response 25-5,000 c.p.s. Input impedance 15 ohms.
Fitted with curvilinear cone, foam plastic surround and extra long voice coil winding which permits large amplitude movements without harmonic distortion. Recommended for use as single speaker for any heavy duty requirement such as public address or home cinema or as bass unit in multi-speaker system. Suitable for use in all types of reflex enclosure horn loading or open baffle mounting. £9.

Model 121 A

As above but with aluminium wire voice coil giving improved transient response and useful range extended up to 10,000 c.p.s. 9 gns.

Not subject to Purchase Tax (Carriage paid in U.K.) Illustrated leaflet available

MODEL 301 H.F. UNIT

Overall dia. 8in.; Overall depth 1¾in.; Power handling 15 watts; Instantaneous Peak; Voice coil dia. ¾in.; Flux density 17,000 gauss; Frequency response 1,500-18,000 c.p.s.; Input impedance 8-15 ohms.
A pressure type high frequency loudspeaker. Handles high note portion of 15 watts of music. Response is level over range, 2,000 to 14,000 c.p.s. beyond which there is gradual roll-off giving useful range of 1,500 to 18,000 c.p.s.
The special hardened aluminium diaphragm with unique loading system gives clean distortionless output at all frequencies in its range which is completely free of resonances or colorations. Will extend range of any existing speaker system and greatly increase transient response and "realism". £3/15/-.



Not subject to Purchase Tax (Carriage paid in U.K.) Illustrated leaflet available

FANE ACOUSTICS LIMITED
BATLEY YORKSHIRE

BOONTON Radio Corporation
Hewlett-Packard Subsidiary

Precision Test and Measuring Instruments — Specified World-Wide for Quality and Dependability

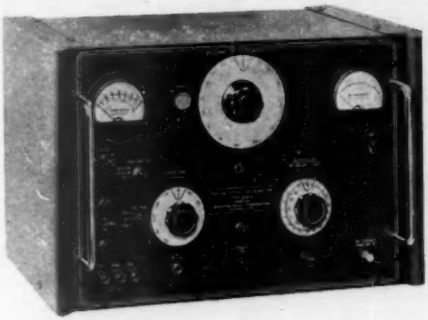

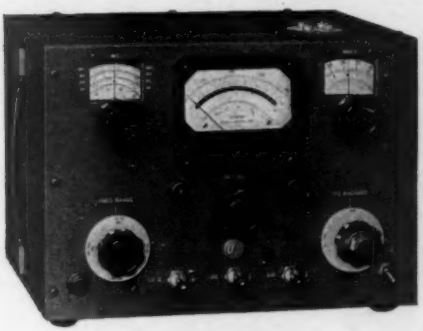

Q Meters	**Type** 260 AP 190 AP	**Freq. Range** 50 KC to 50 MC 20 to 260 MC	**Q Range** 10 to 625 5 to 1200	**Tuning Cap. Range** 30 to 460 $\mu\mu f$ 7.5 to 100 $\mu\mu f$	**Q Accuracy** 5% to 30 MC 7% to 100 MC		**Price** £ 949.–.– £ 959.–.–
Q Comparators	**Type** 265 A	**Freq. Range** 200 KC to 70 MC	**Q Range** 30 to 500	**L Range** 0.15 μh to 15 mh	**C Range** 5 $\mu\mu f$ to .01 μf	**R Range** 500 Ω to 20 M Ω	**Price** £ 326.–.–
FM-AM Signal Generators	**Type** 202 E 202 G 225 AP	**Freq. Range** 54 to 216 MC 195 to 270 MC 10 to 500 MC	**Output Range** 0.1 μV to 0.2 V 0.1 μV to 0.2 V 0.1 μV to 0.1 V	**FM Mod.** 0 to 240 KC 0 to 240 KC 0 to 60 KC	**AM Mod.** 0 to 50% 0 to 100% 0 to 30%		**Price** £ 461.–.– £ 451.–.– £ 388.–.–
Sweep Signal Generators	**Type** 240 AP	**Freq. Range** 4.5 to 120 MC	**Output Range** 1 μV to 0.3 V Sweep 1 μV to 0.1 V CW & AM	**Sweep Range** ±1% to ±30% of center freq.	**AM Mod.** 30%	**Markers** crystal and pip.	**Price** £ 746.–.–
Transistor Test Set	**Type** 275 A	**α-Range** 0.100 to 0.9999	**β-Range** 7 to 200	**H_{fb} Range** 0.30 to 3000 Ω			**Price** £ 383.–.–
RX Meters	**Type** 250 A	**Freq. Range** 500 KC to 250 MC	**R Range** 15 Ω to 100 000 Ω	**C Range** 0 to 20 $\mu\mu f$	**L Range** 0.001 μh to 100 mh		**Price** £ 625.–.–
Signal Generator Calibrators	**Type** 245 C 245 D	**Freq. Range** 500 KC to 1000 MC 500 KC to 1000 MC	**Calibrated Input** 0.025, 0.05, 0.1 V 0.025, 0.05, 0.1 V	**Calibrated Output** 5, 10 or 20 μV 0.5, 1.0 or 2.0 μV	**% AM Range** 10–100% 10–100%		**Price** £ 160.–.– £ 158.–.–
Univerters	**Type** 207 EP 207 GP 203 B	**Freq. Range** 100 KC to 55 MC 100 KC to 55 MC 100 KC to 25 MC	**Output Range** 1 μV to 0.1 V 1 μV to 0.1 V 1 μV to 0.1 V	**FM Mod.** 0 to 240 KC 0 to 240 KC 0 to 15 MC	**AM Mod.** 0 to 50% 0 to 100% 30%	**Accessory to** 202 E 202 G 240 AP	**Price** £ 177.–.– £ 214.–.– £ 173.–.–

BRC Precision Test Equipment is engineered and manufactured to the highest standards of the industry – standards that have made the BRC trademark a recognised symbol of precision and dependability throughout the world.

Prices delivered U. K. exclusive of duty where payable. Continuous progress in design may affect the above specifications which are therefore subject to change without notice. For information, technical sales and engineering help, or a demonstration please write or call

Hewlett-Packard S.A.

Geneva (Switzerland) Rue du Vieux-Billard 1, Tel. (022) 26 43 36

Exclusive Distributor for United Kingdom:

LIVINGSTON LABORATORIES LTD.
RETCAR STREET, LONDON, N. 19

Telephone: ARChway 6251

HPSA - 8 - 412

leads the way

MEDIUM LONG AND SHORT WAVE

SEVEN TRANSISTOR SUPERHET
★ PRE-BUILT UNITS ★

—THE NEW EASY WAY TO BUILD A RADIO—

- Press Button Short, Medium and Long Wave Coil Pack OC170 OSC/Mixer staged. Printed Circuit. Pre-aligned and tested. 98/3. P.P. 1/6
- Printed Circuit IF Strip, 2-OC169, Pre-aligned and Tested. 92/6. P.P. 1/6.
- One watt 4-Transistor Hi-Fi Amplifier. Printed Circuit. 92/6. P.P. 1/6.
- 8in. Ferrite aerial with coils, 12/6. 176pF-176pF Tuner for above, 9/6.

FULLY ILLUSTRATED BOOKLET SHOWING INTERCONNECTION OF ABOVE..... 2/6

CRYSTAL MICROPHONES

(1) **ACOS 39-1** STICK MICROPHONE WITH STAND AND SCREENED LEAD, 39/6, P. & P. 1/6

(2) **ACOS 40** DESK MICROPHONE WITH FOLDAWAY STAND AND SCREENED LEAD, 19/6, P. & P. 1/6

(3) **ACOS 45** (ILLUSTRATED) NEW STYLE HAND MICROPHONE WITH SCREENED LEAD, VERY SENSITIVE, 29/6, P. & P. 1/6

● SPECIAL OFFER ●
6 EDISWAN TRANSISTORS AND TWO DIODES
1—XA102
2—XA101
1—XB103
2—XC101
and
2 Diodes
ONLY **57/6** PER SET
P.P. 1/-.

● SPECIAL OFFER ●
6 MULLARD TRANSISTORS AND TWO DIODES
1—OC44
2—OC45
1—OC71
2—OC72
and
2—OA81
ONLY **62/6** PER SET
P.P. 1/-.

MATCHED SETS FOR HIGH SENSITIVITY

9.72 Mc/s IF STRIP

- 2-EF92 Valves
- 3-EF91 Valves
- 1-EB91 Valve

32/6 P.P. 1/6

BRAND NEW WITH DIAGRAM

"STEREO 3-D"

STEREO RECORD PLAYER AMPLIFIER

New high-gain circuit with full tone, balance and volume controls. Can be used with all types of records as well as STEREO.
★ 2 WATTS PEAK PER CHANNEL
★ ECC83; 2-ECL82 VALVES
★ MAINS 110/250V A.C.
Complete with speaker sockets, calibrated dials, etc. BUILT and TESTED **£5.7.6** P.P. 2/-
★★ COLLARO 4-SPEED STEREO AUTO-CHANGER, ideal for use with above amplifier, £7/10/-, P.P. 3/6.
★★ 9 x 6in. large magnet Elac speaker, for use with STEREO 3-D, 37/- pair. P.P. 1/6.

PRACTICAL TRANSISTOR CIRCUITS

No 2. GADGETS AMPLIFIERS TRANSMITTERS RECEIVERS TEST UNITS All transistor

Now contains 40 Easy to Build Transistor Circuits for the home constructor with diagrams and prices. **3'6** POST FREE

931A (27M1)
(CV 2696)
PHOTO MULTIPLIER

Brand new, original cartons. **60/-** P.P. 1/-. Base 2/-.
Also: Special purpose 931A-CV337 **80/-** each. Base 2/-.

DECCA AMPLIFIER

As supplied in the well-known Deccamatic III. Uses ECL82 valves, full range tone and volume controls. Size 8½ x 3½ x 3in. P.P. 2/6. **59/6**

● IDEAL FOR PORTABLE RECORD PLAYER ●

8 x 6in. CELESTION SPEAKER for use with above. 25/-. P.P. 1/-.

QUARTZ CRYSTALS

FOR TRANSMITTING RADIO CONTROL OSCILLATORS, ETC.
Free List on Request
ALL TYPES FOR ALL PURPOSES

STANDARD AND MINIATURE COMPONENTS

We stock the largest range of components in the country for the home constructor.



We Have Your Item in Stock

FREE LIST AND DATA ON REQUEST.

TRANSISTORS
From **3'6** EACH

SEND FOR NEW FREE LIST WITH DATA AND USES
FULLY GUARANTEED
We can Supply a Transistor for Every Need!

VALVES



TRANSMITTING RADIO AND TV VALVES, TUBES AND INDUSTRIAL TYPES.
NEW **FREE** LIST ON REQUEST.

★ A SMALL SELECTION FROM OUR RANGE OF EASY TO BUILD TRANSISTOR UNITS ★
— DIAGRAMS 6d. EACH POST FREE —

HEARING AID
Three transistor transformer, coupled high gain circuit. Size 3 x 2 x ¾in., including mic. and battery.
All parts with earphone. 79/6. P.P. 1/-.

RF, IF and AUDIO TRACER
Handy test unit. Ideal for servicing all types of radios, etc. Includes min. earphone, two transistors. Size 3 x 2 x ¾in. All parts. 45/-. P.P. 1/-.

2-WATT OUTPUT AMPLIFIER
Single transformer coupled power transistor. Ideal for added output when using your portable in the car. Works from 12 to 14 volt supply.
All parts. 49/6. P.P. 2/-.

RADIO CONTROL RECEIVER
Four transistor transformer, coupled single channel. Size 3 x 2 x 1in. Weight 2 oz. Operates actuator, etc. direct. Range approx. ¼ mile.
All parts (less battery). 89/6. P.P. 1/6.

250mW OUTPUT AMPLIFIER
Two transistor push-pull output stage. For use with Ranger-3 or similar. Includes Elac 3in. speaker.
All parts with battery. 59/6. P.P. 1/6.

3-12 MC/S CRYSTAL MARKER
Crystal controlled oscillator. Uses fundamental crystals of FT243, 10X, R76, etc.
All parts (less crystal). 20/-. P.P. 1/-.
Crystals from 5/-. See separate list free on request.
Ideal for frequency check or BFO.

NEW LIGHT OPERATED SWITCH
With two transistors and light sensitive cell. Operates from 12 to 18 volts. Includes relay. Size 3 x 2 x ¾in.
All parts. 29/6. P. P. 1/-.
Ideal for car lights or alarm.

RF AND IF SIGNAL GENERATOR
For alignment of all receivers. Output 450 to 465 kc/s. Steps up to 4 Mc/s. Size 3 x 2 x ¾in.
All parts 22/6. P.P.1/-.

AUDIO TEST GENERATOR
New design giving pure sine wave. Approx. 112 c/s.
Ideal for bridges, modulator or amplifier checker.
All parts. 24/-. P.P. 1/-.

TELEPHONE PICK-UP AMPLIFIER
Ideal for the busy office. No more "holding on" and wasting time. Four transistor push-pull circuit; 5in. speaker. Attractive cabinet. All parts with battery and telephone coil. 92/6. P.P. 2/-.

BUILT AND TESTED £5/10/-. P.P. 2/-.

LOW IMPEDANCE PRE-AMP
For coupling a low impedance mic. or P.U. to a valve amplifier. Works from 150 to 250 volts D.C. taken from amplifier. HIGH GAIN, NO HUM.
All parts 12/6. P.P. 1/-.

ALL PARTS IN STOCK FOR "WEYRAD"
6-TRANSISTOR SUPERHET
● FREE LIST ON REQUEST.

HENRY'S RADIO LTD.

5 HARROW ROAD, EDGWARE ROAD, PADDINGTON, LONDON, W.2
Opposite Edgware Road Tube Station. *PADdington* 1008/9. OPEN MONDAY to SAT. 9-6. THURS. 1 o'clock

COMPLETE ILLUSTRATED LEAFLET OF ALL HOME CONSTRUCTION UNITS FREE ON REQUEST.

The "CONTESSA" NEW 6-TRANSISTOR COMBINED PORTABLE/CAR RADIO

SPECIFICATION
- 425mW Push-Pull Output
- 6 " Top Grade " Ediswan Transistors
- New Type Printed Circuit with all Components Marked
- Full Medium and Long Wave Tuning
- High " Q " Internal Ferrite Aerial
- Car Radio Adaptation and AVC
- Slow Motion Fingertip Tuning
- " Hi-Fi " Quality Speaker
- Size 10 x 7½ x 3½in. Weight 4½lb. All components available separately

ALL THE CONTINENTAL AND LOCAL STATIONS AT YOUR FINGERTIPS
Call for Demonstration

" First Class in every way "

EQUALLY SENSITIVE ON MEDIUM AND LONG WAVE BANDS
★ STEP BY STEP FULLY ILLUSTRATED INSTRUCTIONS
★ ALL COMPONENTS GUARANTEED
★ AFTER SALES SERVICE

Total Cost of all Components
£11.10.0 P.P. 3/6
Including Cabinet, Battery, Transistors, Car Radio, AVC and all necessary items.

★ SIMPLE TO CONSTRUCT
★ NO TECHNICAL KNOWLEDGE REQUIRED
★ WORTH DOUBLE WHEN BUILT
★ EXCELLENT RESULTS ANYWHERE

DESCRIPTIVE LEAFLET FREE ON REQUEST

★ RANGER-3 ★ PERSONAL POCKET RADIO

FULL TUNING OF MEDIUM WAVEBAND AND AMATEUR TOP BAND (120 metres to 500 metres)
● LUXEMBOURG GUARANTEED (where normally receivable)

★ Full Station Separation
★ Calibrated Dial
★ Fingertip Control
★ 6 Months' Battery Life
★ Fitted Volume Control
★ 3 High Gain Transistors
★ Size 4½ x 3 x 1½in.

TOTAL COST with Personal Earphone, Battery Transistors, etc.
79/6 P.P. 1/6.
All parts sold separately and guaranteed.

● NO EXTERNAL AERIAL OR EARTH
● AFTER SALES SERVICE

Full Instructions and Prices FREE On Request.
Continental as well as local stations—GUARANTEED!

THE "PW" 6-TRANSISTOR POCKET SUPERHET

Full Medium and Long Wave Tuning
★ Printed circuit with all components marked
★ 6 MULLARD TRANSISTORS
★ Built-in Ferrite Aerial
★ 150mW Output Push-Pull
★ Quality 2½in Speaker
★ Size 5½ x 3 x 1½in.
All Parts Sold Separately
● Easy Construction
● Excellent Performance

FREE LEAFLET WITH PRICES ON REQUEST

TOTAL COST OF all NECESSARY ITEMS
£9.19.6
No extras to buy

ADDRESS

HENRY'S RADIO LTD.

● ACKNOWLEDGED THE SPECIALISTS ●

★ TRANSISTORS ★ QUARTZ CRYSTALS ★ VALVES & TUBES ★ MINIATURE & ★ STANDARD ★ COMPONENTS

A SHORT LIST FROM OUR VAST STOCK

COSSOR "TRAVELLER'S FRIEND" 4 TRANSISTOR POCKET RADIO
Complete kit of parts to build this wonderful set. Size 6 × 3¾ × 1¾ins. Weight 17 ozs. Printed circuit, ferrite aerial, 2in. speaker. Original price 18 gns.
£7-19-6 Complete P. & P. 2/6

"EASY SIX" PORTABLE TRANSISTOR RADIO
Printed circuit, ferrite aerial, 5in. speaker, push-pull output. Long and Medium waves. Complete kit of parts.
£9-15-0 P. & P. 1/6

LABGEAR AUDIO POWER OUTPUT METER
Build this wonderful meter in an evening. Two ranges: 25 mW-1 W and 1 W to 10 W. Accuracy 5%. Complete kit.
£2-19-6 P. & P. 2/-

TAPE DECKS
COLLARO STUDIO TAPE TRANSCRIPTOR
3 motors, 3 speeds 1⅞, 3¾, 7½. Push button controls. **LIST PRICE 16 GNS.**
£12-19-6 P. & P. 3/6

TRANSISTORS
P.N.P. Junction types.
AUDIO, suitable for high gain and low freq. amplifiers, and for output stages up to 250 milliwatts. Double spot—yellow and green.
Each **5/-**
R.F. suitable for medium and low freq. oscillators, freq. changers and I.F. amplifiers (1.5 to 8 Mc/s.). Double spot—yellow and red.
Each **7/6**
Type T81. Suitable for all audio applications.
Post 6d. Each **3/6**
One dozen **35/-** post free
Special prices quoted for large quantities.

AVANTIC STEREOPHONIC HI-FI AMPLIFIERS—

AT ALMOST HALF LIST PRICE WHILE EXISTING STOCKS LAST. BRAND NEW IN MAKER'S CARTONS—100—250 VOLTS—SMALL DEPOSIT SECURES.

PL6/21 10 WATT MONAURAL AMPLIFIER AND COMBINED PRE-AMPLIFIER CONTROL UNIT
5 Inputs. Size 14½in. wide, 9in. deep, 4in. high.
19 GNS. LIST PRICE £29-8-0
CARR. & INS. 7/6.

SPA11 STEREO AMPLIFIER AND PRE-AMPLIFIER
Twin 10 watts output, 3-dimensional Monaural reproduction by combining both channels, 3 inputs for each channel. Size 14½in. wide, 4in. high, 8½in. deep. **LIST PRICE £29-8-0**
19 GNS. CARR. & INS. 7/6

STEP 11 STEREO PICK-UP PRE-AMPLIFIER UNIT
Size 7⅛ × 4⅛ × 2⅛in. **LIST PRICE £6-16-6**
£4-19-6 CARR. & INS. 7/6

RECORD CHANGERS

B.S.R. U.A.8 complete with latest "ful-O" cartridge	£6-19-6
Stereo	£7-19-6
COLLARO CONQUEST 4 Speed auto	£7-19-6
GARRARD RC120 4 Speed auto	9 GNS.
COLLARO JUNIOR 4 Speed Single Play Complete with Arm and P.U.	£3-15-0

P. & P. 3/6.

CRYSTAL DIODES
General Purpose GEX00, each 1/-, per doz. 9/-. All other types in stock. All types of Sub min. Condensors and Resistors. Send S.A.E. for our List of All Components.

DL7-35 POWER AMPLIFIER
54 watt peak output. Freq. response 5 c/s-30 Kc/s ± 0dB. Two of these can be used in conjunction with SP21/2 Pre-Amp. Control Unit for stereophonic reproduction. Size 14½in. long, 9in. wide, 8½in. high.
£16-19-6 LIST PRICE £31-10-0
CARR. & INS. 12/6

SPECIAL OFFER TO ALL OUR CUSTOMERS
Two DL7-35 Power Amplifiers and one SP21/2 Stereo Control Unit at a special price of **47 GNS.**
Ideal for use in clubs, halls, public performances, etc.

SP21/2
STEREO PRE-AMPLIFIER CONTROL UNIT
Twin channel. Designed primarily for use with two DL7 35 Power Amplifiers. Six inputs for each channel. **LIST PRICE £28-10-0**
£16-19-6 CARR. & INS. 7/6

WIRECOMP ELECTRONICS

378 HARROW ROAD LONDON, W.9. TEL.: CUNNINGHAM 9530
Hours of business: 9 a.m. to 6 p.m. Open all day Saturday
Opposite Paddington General Hospital. Buses 18B & 36 pass the door.

FOR VALVES AND SPARES FROM STOCK - RETURN POST

EF92	6/-	N78	19/11	U10	9/6	VR150/30	7/6	5Z4G	9/-	6J5M	6/6	6/30L2	12/6	12SL7	8/-
EK32	7/-	OZ4	5/6	U25	13/6	VU39(MU12/14)	8/9	6A8G	9/-	6J7G	6/6	7B6	10/6	12SM7GT	10/-
EL32	4/6	P61	3/6	U26	10/-	Y63	7/6	6AK5	5/-	6K7G	4/-	7C5	8/-	15D2	7/9
EL33	14/-	PCC84	8/6	U50	8/-	Z77	11/6	6AM5	7/6	6K8G	6/6	7H7	8/-	25A6	9/-
EL41	9/-	PCC85	11/6	UABC80	9/-	1A7GT	12/6	6AL5	4/-	6K7M	6/9	7C6	8/-	25L6GT	10/-
EL84	9/-	PCF80	8/9	UAF42	9/6	1C5GT	12/6	6AM6	4/-	6K7GT	5/9	7S7	8/-	25Z5	8/-
EL91	4/6	PCF82	11/6	UBC41	8/6	1H5GT	9/-	6AQ5	7/6	6K8GT	10/-	7Y4	8/6	25Z6	10/-
EM34	9/6	PCL82	11/6	UBC81	11/4	1N5	10/6	6AT6	8/6	6L6G	8/-	10F1	12/6	30FL1	10/6
EM80	9/6	PCL83	13/6	UBF80	9/-	1R5	7/6	6BA6	7/6	6L6M	9/6	10P13	23/3	30L15	23/3
EM81	10/6	PL36	14/6	UCC84	10/11	1S5	6/6	6BH6	9/-	6N7GT	7/6	12A6	5/-	30P4	15/-
EY86	10/-	PL82	8/6	UCH42	9/6	1T4	5/6	6BJ6	9/-	6Q7G	7/6	12AH8	12/-	30P12	12/6
EY51	9/6	PL83	9/6	UCH81	9/6	2D4	5/-	6BW6	9/-	6Q7GT	9/6	12AT7	7/6	30PL1	12/6
EZ40	7/6	PL84	7/6	UCL82	11/6	3D6	5/-	6C4	4/6	6SK7	6/-	12AU7	8/-	35L6GT	10/-
EZ41	7/6	PX25	12/6	UCL83	13/6	3Q4	7/6	6C4	4/6	6SK7	6/-	12AX7	8/-	25Y5	9/-
EZ80	7/-	PY80	7/6	UF41	9/6	3Q5GT	9/6	6C5GT	6/6	6SL7GT	8/-	12BA6	8/-	35Z4GT	8/-
EZ81	7/-	PY81	8/6	UF85	9/-	3S4	7/6	6C6	5/-	6SN7GT	7/6	12BE6	9/-	42	8/-
FW4/500	10/-	PY82	7/-	UF89	9/-	3V4	8/-	6D6	5/-	6SQ7	9/3	12C8	7/-	35Z5GT	9/-
GZ32	11/6	PY83	8/6	UL41	9/-	4D1	3/-	6CH6	8/6	6U4GT	12/-	12J7GT	10/6	50L6GT	8/6
HL23DD	8/6	PEN4VA	10/-	UL84	9/-	5R4GY	9/6	6F6G	7/-	6V6G	6/-	12K7GT	6/6	75	10/6
HL42DD	10/-	PEN25	6/-	UU6	10/-	5U4G	6/-	6F6M	7/6	6V6GT	7/9	12K8GT	13/6	80	8/6
KT2	5/-	PEN45	10/-	UY1N	12/6	5V4	11/6	6F1	14/-	6X4	7/6	12K8M	13/-	142BT	3/6
KT33C	8/6	PEN46	7/-	UY41	7/6	5Y3G	8/-	6F15	14/-	6X5G	7/-	12Q7GT	6/6	210DDT	4/6
KT61	6/6	PENA4	12/6	VP23	6/6	5Y3GT	7/6	6J5GT	5/-	6X5GT	7/-	12SK7	6/-	210VPT	3/6
KT66	9/-	PEN(BVA)	9/-	MX40	12/6	TP25	10/-	VR105/30	8/-						

SPECIAL MAINS DROPPER RESISTORS

SMD1 Philips 209U 6/3
SMD6 Ultra Twin 50 ..... 5/3
SMD7 Ultra Twin 50 ..... 5/3
SMD15 Philips 141U and Stella ST105U 5/3
SMD27 Pye Piper 6/9
SMD30 KB Rhapsody MPI51/1 6/9

CLAROSTAT POTENTIOMETERS FOR STEREOPHONIC AMPLIFIERS, etc. 50K x 50K Log., 100K x 100K Log., 500K x 500K A/Log., 1 Meg. x 1 Meg. Log., 250K x 250K Log., 1 Meg. x 1 Meg. Linear, 500K x 500K Linear. All 6/6 each.

SWITCHES, WAVE CHANGE SWITCHES ETC.

3 POLE, 4 WAY ..... 3/- ea.
4 POLE, 3 WAY ..... 3/- ea.
1 POLE, 4 WAY ..... 2/- ea.
1 POLE, 12 WAY ..... 3/- ea.
2 POLE, 6 WAY ..... 3/- ea.
4 POLE, 4 WAY ..... 4/6 ea.
3 POLE, 3 WAY ..... 3/- ea.
3 POLE, 3 WAY, 3 BANK 2/3 ea.

BEST QUALITY RECORDING TAPE

1,200ft. on 7in. spool 21/-
850ft. on 5½in. spool 18/6
600ft. on 5in. spool 13/9
200ft. on 3½in. spool 5/3

COLLARO JUNIOR SINGLE 4-SPEED RECORD PLAYER UNIT IN CREAM, COMPLETE WITH PICK-UP FITTED TURNOVER, CARTRIDGE. Special Price 75/- each. Post 3/6.

Garrard GC2 Crystal Cartridge. Black moulded case complete with Standard and LP styli. Price 15/6.

4BA TERMINALS, RED AND BLACK, SUITABLE FOR BATTERY CHARGERS, etc., 1/6 each.

PANL—air drying Paint Black Crackle (Crystalline Black), 3/- tin.

TUNING INDICATOR ESCUTCHEON SUITABLE FOR EM80 TYPE OF VALVES, 2/- each.

TELEVISION TUBES REGUNNED, 12 MONTHS' GUARANTEE

MW31/74, £5/10/-; CRM152B, £6; MW36/24, £5/10/-; CRM141 £5/10/-; CRM123, £5/10/-; MW43/69, £6; CRM171, £6. Carriage and insurance 10/- extra. Allowance on old tube if returned.

SVB MINIATURE M/C. L.S. L.P. 45 F. 1¼in. x ¼in. deep.

9,000 GAVS., Ferrite magnet, MAX loading 2.3 watts. 25/-.

METAL RECTIFIERS.
Alpha Range of Guaranteed Bridge Rectifiers suitable for Battery Chargers 6 and 12 volt output:

2 amp. 7/-
4 amp. 12/6
3 amp. 10/-
5 amp. 14/6

Westinghouse LW9 Rectifier 250 v., 250 mA. 19/6.

WB STENTORIAN HFI012 10 WATTS 95/- EACH.

BSR Monarch UA8, Record Changer £6/19/6.

SCOTCH RECORDING TAPE 150/18, 7in. SPOOL 50/-.

"Wireless World" Radio Valve Data Book 5/-.

TAYLOR MODEL 127A MULTIMETER £10.

High Resistance Headphones 4000 ohms, 13/6.

REPANCO FS 3 FERRITE SLAB AERIAL 7/6.

Multicore Savbit Solder 5/-.

HENLEY SOLON INSTRUMENT IRON, MODEL 625 24/-.

J.B. 'O' Gang Condenser 365pf, 1 gang 7/6.

BELLING-LEE DIPLEXER L1338 11/-.

Output Transformer 5000/3 ohms, 60 mA. 5/9.

10in. ELAC LOUDSPEAKERS, 25/-.

Collaro Conquest, with Studio Pick-up, £6/19/6.

ACOS CRYSTAL STICK MICROPHONE 39/1, £1/19/6.

Deccamatic Amplifier with speaker 85/-.

BIB RECORDING TAPE SPLICER 18/6.

Mullard Circuits for Audio Amplifiers, 8/6.

ELSTONE MULTI-RATIO OUTPUT TRANSFORMER 10 Watts 23/-.

TSL Crystal 'Stick' Microphone MX3, 45/-.

CATALOGUE

Our 1961 catalogue is now available. Please send 1/- in stamps for your copy. Trade catalogue also available. Please attach your business letter heading.

TRF KIT COMPLETE £5/10/-.

Line Output Transformer for Pye V4 etc., 55/2.

REPANCO DRR1 DUAL RANGE COIL, WITH REACTION 4/-.

J.B. SL8 Spin Wheel Drive Assembly 27/6.

J.B. SOLID DIELECTRIC CONDENSERS, .0005 4/6 each.

Ion Traps Type IT6, IT9, BC11, 5/6 each.

TCC VISCONOL CONDENSER .001 20KV 10/-.

Potentiometer SP5 for English Electric T40 etc., 13/6.

ERIE 6 AND 10 WATT WIREWOUND RESISTORS 2/- each.

Semi-Airspaced Co-Axial cable 6d. yard.

SIGNAL LAMP FITTINGS, RED, GREEN AND AMBER 2/3 each.

3 way line cord. .2A, 100 ohms per foot, 1/9 yd.

DROPPER RESISTORS FOR ULTRA TWIN 50, 5/3 each.

T.V. Electrolytic 100-200 mfd. 275 v. 7/6 each.

CAR RADIO AERIALS (TELESCOPIC) 39/6 each.

Igranic type P50 Jack Plugs 2/9 each.

OSMOR FERRITE ROD L & M WAVE 12/9 each.

Repanco T19 Interstage Transformer 12/6.

MINIATURE I.F. TRANSFORMERS, 465 Kc/s 9/- pair.

Low Resistance Headphones 120 ohms 7/6 pair.

PLASTIC SPEAKER CABINETS FOR 5in. UNIT, WHITE 15/-.

Acos Mic 40, with folding stand 19/6 each.

PICKUP MATCHING TRANSFORMER BSR AF333 36/-.

Collaro Mark IV Tape Transcriptor £17/19/6.

CELESTION 2½in. SQUARE LOUDSPEAKER 26/8.

Rectifier RM4, 250 v., 275 mA. 18/6.

MICROPHONE TRANSFORMER 100-1 RATIO 12/-.

Repanco Mini 3, 3 Transistor Kit £7/10/-.

GARRARD TA MARK II, SINGLE PLAYER £8/10/-.

GELOSO 9010 TELEPHONE ADAPTOR 45/-.

Elac 8in. x 5in. Loudspeaker 25/6.

PIFCO ALL-IN-ONE RADIO METER 32/6.

Repanco TT 10 Push-Pull Output Transformer 12/6.

LINECORD 3 WAY .3A, 60 OHM PER FOOT, 1/9 yard.

4in. Square Tweeters, Elac or Plessey, 12/6.

100 ASSORTED RESISTANCES ½-1 WATT 12/6 per 100.

Crystal Cartridge BSR Type TC8, 15/6 each.

DIODES: OA81, GEX34, OA70, etc. 4/- each.

7in. Plastic Tape Spool Emitape 3/- each.

CHARGER TRANSFORMERS 2V, 6V and 12V, 4A, 21/9.

Rectifiers, RM1, 5/9, RM3 7/3, M1 2/8.

12in. HEAVY DUTY 15 WATT SPEAKER, 105/-.

BSR Monarch UA14, in 2 tone grey, £8/19/6.

ACOS DUST BUG FOR AUTOCHANGERS 23/4.

Baffle Speaker Cabinet, 8in. 21/6, 7in. x 4in. 19/6.

ACOS PICK-UP ARM TYPE GP54, WITH CARTRIDGE 29/6.

J.B. SL15, FM/VHF Dial Kit 25/6.

3 PIN CONTINENTAL PLUG AND SOCKET 4/9 pair.

Scotch "One Five Special" New 3in. Reel 5/3.

DUBILIER SUPPRESSOR KIT. 1A. 5/6, 2A. 6/-, 3A. 6/6.

3-WAVEBAND CONVERTOR. Med., Long, Short. Using OC170 Transistor. 4 pushbuttons. Wavechange on/off switches. Overall size 3.4in. x 2.1in. x 1.8in. 90/3.

SET OF AERIAL COILS ..... 9/-.

I.F. STRIP. 460 Kc/s. I.F. amplifier. Pair of OC169 Transistors. Overall size 3.5in. x 1.5in. x 1.5in. x 1in. 92/6

8in. x 3/8in. FERRITE ROD, 5/-.

1 WATT A.F. AMPLIFIER. 2-OC71 Transistors direct coupled, cascade drive into a matched pair of OC74s in CLASS B Push-pull providing up to 1 watt undistributed output from 5 MV to 1.5 Kohn. Overall size 3in. x 2.2in. x 1.2in. 92/6.

ALPHA RADIO SUPPLY CO.

103 LEEDS TERRACE, WINTOUN STREET

LEEDS 7

TERMS: Cash with order or C.O.D. Postage and Packing charges extra, as follows: Orders value 10/- add 1/-; 20/- add 1/6; 40/- add 2/-; £5 add 3/- unless otherwise stated. Minimum C.O.D. fee and postage 3/-.
For full terms of business see inside cover of our catalogue.
Personal shoppers 9 a.m. to 5 p.m. Mon. to Friday. Saturday 10 a.m. to 1 p.m.

RCA AR88 RECEIVERS

One of the most renowned American Communications Receivers ever manufactured. Widely used by all the Armed Services to maintain World-wide Communications and Monitoring Posts under all conditions. Employs 14 valves, and has 6 switched overlapping wave bands for complete coverage. Refinements include Mechanical Band Spread with Logging Scale, Automatic or Manual Volume Control. Automatic or Manual Noise Limiter, BFO with pitch control, RF and AF Gain Controls, Variable HF Tone Control, Variable Selectivity with Crystal Filter, Aerial Trimmer, Choice of Headphones or Speaker. Has internal mains power pack for nominal 115-230 volts A.C. In Black Crackled Case size 19½in. W. x 11in. H. x 19½in. D. Thoroughly reconditioned, immaculate in appearance, and in perfect working order. "D" Model covers 500 kc/s-32 Mc/s, price £45. "LF" Model covers 75-550 kc/s. and 1.5-30.5 Mc/s. Price **£35** (add carriage 30/- and 50/- deposit on returnable transit case). S.A.E. brings illustrated descriptive leaflet.

R1155 RECEIVERS

The famous Bomber Command Receiver known the world over to be supreme in its class. Covers 5 wave ranges: 18.5-7.5 Mc/s 7.5 -3.0 Mc/s. 1,500-600 kc/s., 500-200 kc/s., 200-75 kc/s. and is easily and simply adapted for normal mains use, full details being supplied. All sets thoroughly tested and in perfect working order before despatch, and on demonstration to callers. Fitted with latest type Super Slow Motion tuning assembly. Have had some use, but are in excellent condition. ONLY **£9/19/6**.

A.C. MAINS POWER PACK OUTPUT STAGE in black metal case to match receiver, enabling it to be operated immediately, by just plugging in, without any modification. Fitted with 3in. P.M. speaker **£6/10/-**. DEDUCT 10/- IF PURCHASING RECEIVER AND POWER PACK TOGETHER.

Send S.A.E. for illustrated leaflet, or 1/3 for 14-page booklet which gives technical information, circuits, etc., and is supplied free with each receiver. Add carriage 10/6 for Receiver, 5/- for Power Unit.

RCA 8in. P.M. SPEAKER in heavy black crackled metal case, size 11½in. × 10½in. × 8in. Designed for use with AR88 Receiver or any set with 3 ohms output. BRAND NEW IN MAKER'S CARTONS ONLY 45/-. (Post 3/6).

CANADIAN MOVING COIL PHONES. Low resistance, fitted noise excluding chamois ear muffs, and leather covered head-band. Lead terminates to jack plug. BRAND NEW. ONLY **19/6** (Post 1/6).

OSCILLOSCOPE No. 11 by Cossor. A First Grade L.F. Oscilloscope incorporating a Hard Valve Time Base with speeds of 1-5-40 milliseconds but easily converted for a few shillings to produce 3 c.p.s. to 30 kc/s. Has High Class Amplifier with Fine and Coarse Gain controls, Brightness and Focus controls, X and Y shifts. A.C. mains pack for 110 v. -230 v. nominal, fully fuse protected. Employs 2½in. Tube ACR 10. Front panel 19in. × 7in. for rack mounting, depth 12in., or can be used in Steel Transit Case on bench. Complete with suggested Modification data. BRAND NEW AND UNUSED. ONLY £12/10/- (carriage 15/-).

CARRYING CASES, solid leather. SLIGHTLY USED. Internal dimensions 8½in. H. × 8½in. W. × 4½in. D. Fitted lock and key, and shoulder strap. Ideal for Test Instrument, Camera and accessories, etc. ONLY **25/-** (postage 2/-).

BC 348 RECEIVERS. A few only of these famous American sets covering 1.15-18.0 Mc/s. in six bands. Internal 115 v. A.C. Mains pack. A super receiver in first-class condition and perfect working order. ONLY **£25** (carriage 15/-).

HRO MAINS POWER UNITS. A.C. Input 115/230 volts, Output D.C. (fully smoothed) 230 volts 75 mA., and 6.3 volts 3.5 amps. Complete in black crackled case ONLY **59/6**.

15-WAY SCREENED CABLE. In 10ft. lengths, fitted with plugs, originally made for No. 19 Wireless Set. UNUSED. ONLY **15/-** per lead.

P.M. SPEAKERS. 3in. **19/6**, 6½in. **17/6**, 8in **21/-**, 12in. **29/6**.

SPRAGUE CONDENSERS. Metal cased wire ends. New. .01 mfd. 1,000 v. and .1 mfd. 500 v. **7/6** per dozen. Special quotes for quantities.

HETERODYNE FREQUENCY METERS TYPE LM14



Frequency range 125-20,000 kc/s. in 2 bands. This is the United States Navy Model of the well-known BC.221 Frequency Meter, but has many additional features which increase its usefulness. Voltage stabilisation circuits and Crystal control ensure extreme accuracy, and in addition it is fitted with an Internal Modulation switch to allow use as a Signal Generator. Size only 8½in. × 8in. × 8½in. Full information on request.

UNIVERSAL VOLT—OHM—MILLIAMETER

Reads A.C. and D.C. Volts up to 1,000 in 5 ranges at 1,000 o.p.v., D.C. Current (5 ranges) to 500 mA. Resistance readings to 200 Kohms in 2 ranges. Basic movement 200μA sensitivity. Easily read open scale. Dimensions 5½in. × 3½in. × 2½in. Beautifully made, and fully guaranteed. Complete with leads, prods and internal battery. ONLY **59/6**

DOUBLE BEAM OSCILLOSCOPE TUBES

Type CV 1596 equivalent to Cossor O9D as used in oscilloscopes by Cossor (339 series). Hartley and Erskine (13 series). Listed at **£12/10/-.**

Our price £2/19/6 (carriage 5/6)

Brand new in makers' crates

W 1191A WAVEMETER

Crystal controlled heterodyne frequency meter covering 100 kc/s to 20 Mc/s. in 8 switched bands and is virtually the British BC221. Power requirements 8 v. L.T. and 40-60 volts H.T. Complete with Calibration Book, Crystal, Operating Valves and full set of spares. BRAND NEW IN ORIGINAL TRANSIT CASES. ONLY **£9/19/6** (carriage 15/-).

METERS

F.S.D.	SIZE AND TYPE			PRICE
25 microamps	D.C.	2½in. Proj.	circular	59/6
50 microamps	D.C.	2½in. Flush	circular	59/6
50 microamps	D.C.	3½in. Flush	circular	80/-
100 microamps	D.C.	2½in. Flush	circular	39/6
1 milliamp	D.C.	3in. Flush	square	22/6
1 milliamp	D.C.	2½in. Flush	circular	30/-
1 milliamp	D.C.	2½in. Flush	circular	25/-
1 milliamp	D.C.	3½in. Flush	circular	50/-
200 milliamp	D.C.	2½in. Flush	circular	12/6
20 amps	D.C.	2in. Proj.	circular	7/6
40 amps.	D.C.	2in. Proj.	circular	7/6
5 amps	D.C.	2in. Flush	square	12/6
300 volts	A.C.	2½in. Flush	circular	25/-
500 volts	A.C.	2½in. Flush	circular	25/-

V.H.F. RECEIVER TYPE R.1392. A superb 15-valve superhet receiver covering 95-150 Mc/s. (3-2 Metres), being fully tunable over that range, with provision for Crystal Control. Has 2 stages of R.F., 3 of I.F. BFO AGC, etc. Fitted with 2in. square meter for Oscillator and Audio Signal checking. Size 19in. × 10in × 10in. Used but in very good order, thoroughly air tested before despatch. Power supply required: 240-250 volts at 80 mA. and 6.3 volts at 4 amps. Complete with valves and circuit diagram. ONLY **79/6** (carriage, etc. 10/6).

HIGH FREQUENCY A.C. VOLTMETER. A first-grade moving iron instrument with 6in. Mirror Scale reading up to 150 volts A.C. at 400 and 1,500-2,400 cycles. In substantial oak case with removable lid, overall size 8½in. × 8½in. × 5½in. Recently made for the Air Ministry by Everett Edgcumbe Ltd., and in perfect order. Brand new and unused. ONLY **£7/10/-**. Can also be supplied for 50 cycles use, either 0-150 volts or 0-300 volts, same price.

POWER UNIT TYPE 3. Primary 200/250 volts A.C., 50 cycles. Outputs of 250 volts 100 mA. and 6.3 volts 4 amps. Fitted double smoothing and 2 meters to read H.T. current and voltage. For normal rack mounting (or bench use) having grey front panel. Size 19in. × 7in. BRAND NEW. ONLY **79/6** (carriage 7/6).

INTERCOM. TELEPHONE SET. Two pairs of Brand New Headphones connected to Breast Microphones, with leads, etc., in fitted carrying cases. Supplied with 4½ volt battery, 10 yards twin flex, and full instructions for connecting to make super intercom. ONLY **27/6**. (Post 3/6). Extra flex 3d. per yard.

10,000 OHMS PER VOLT TESTMETER. This latest Caby model is a handy pocket sized tester 5½ × 3½ × 2½in. Reads low D C voltages at 10,000 ohms per volt, up to 10,000 v. A.C. and D.C. at 4,000 o.p.v. Resistance to 20 megs. D.C. current to 250 milliamps and also Decibels. Complete with Test Leads, Batteries and Instruction Book. ONLY **£6/10/-**.

12 VOLTS AMERICAN DYNAMOTOR. Delivers 230 volts at 100 mills. Size 5½ × 3½in. diameter. Ideal for running Radio and Electric Shaver etc., from car battery. ONLY **32/6**.

MARCONI SIGNAL GENERATOR TF 1440/7. Coverage 85 kc/s.-2.5 Mc/s. and 8 Mc/s.-70 Mc/s. Complete, and in AS NEW CONDITION. ONLY **£95**.

AMPLIFIER N24



Utilises 4 valves, 1 each 5Z4G, 6V6G 6J7G, 6J5G and high quality components such as "C" Core Transformers and Block Paper Smoothing Condensers. A.C. Mains Pack for nominal 110 × 230 volts. Provision for 600 ohms or High Impedance input. Output to 600 ohm Line. For normal use only requires changing Output Transformer. Output approximately 4 watts Designed for Standard Rack Mounting, having grey front panel size 19in. × 7in. All connections to rear panel, front having "On/Off" Switch. Gain Control. Indicator Light. Fuses and Valves Inspection Panel. BRAND NEW IN MAKER'S PACKING. ONLY **£4/9/6** (carriage 10/6).

Cash with order please, and print name and address clearly

PLEASE ADD POSTAGE OR CARRIAGE COSTS ON *ALL* ITEMS

HARRIS ELECTRONICS (LONDON) LTD.

Radio Corner, 138 Gray's Inn Road, London, W.C.1. Phone: TERMINUS 7937

Open until 1 p.m. Saturdays. We are 2 mins. from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross.

G.W. SMITH & CO (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX, LESQUARE
3-34 LISLE STREET, LONDON W.C.2

SELENIUM L.T. RECTIFIERS. Full wave, bridge connected. 12/18 v. 1.5 A. 4/3; 12/18 v. 2½ A. 6/9; 12/18 v. 4 A. 9/9; 12/18 v. 5 A. 12/6; 12/18 v. 6 A. 13/6; 24/36 v. 1. A 12/6; 24/36 v. 4 A. 22/6; 24/36 v. 15 A. 62/6. Please add postage.

L.T. TRANSFORMERS. For charging or models. All 200/250 v. primaries. 3.5, 9 or 17. 1 A. 9/9; 3.5, 9 or 17 v. 2 A. 14/3; 3.5, 9 or 17 v. 4 A. 16/6; 9 or 17 v. 6 A. 26/-; 3, 4, 5, 6, 8, 10, 12, 15, 18, 20, 24 or 30 v. 2 A. 18/6; 3, 4, 5, 6, 8, 10, 12, 15, 18, 20, 24 or 30 v. 4 A. 30/-. P/P 1/3.

1 Megohm 1% WIREWOUND RESISTORS. 10/- per doz.

6 VOLT AC/DC BUZZERS. 3/6 ea. P/P 6d.

CV. 339. 11in. C.R.T. 4 v. heater, 600–1 kv. anode. Boxed, 19/6 ea. P/P 1/6.

MARCONI TF. 340 OUTPUT METERS. Reconditioned, perfect order. £9/19/6 ea. P/P 7/6.

MARCONI TF. 373 UNIVERSAL IMPEDANCE BRIDGES. Reconditioned to maker's spec. 0–100H., 0–100 mfd., 0–1 megohm, 0–100 Q. each on 5 ranges at 1,000 c/s., £35 ea.

MARCONI TF. 329 "Q" METERS. Range 0 to 500 Q. Frequency 50 kc/s to 50 mc/s. Reconditioned to maker's spec., £65 ea.

CERAMIC SWITCHES. 1 pole 6 way, 2/6; 2 pole 3 way, 2/6; 4 pole 3 way, 2/6; 2 pole 12 way, 2B., 5/6; 3 pole 12 way, 3B., 7/6; 8 pole 5 way, 4B, 7/6. P/P extra.

DEAF-AID EARPIECES. ER.100, 250 ohm imp. 4/6; ER.250, 1,000 ohm imp. 7/6. P/P 6d.

PAINTON MINIATURE JONES PLUGS AND SOCKETS. All new. 2 pin 2/6 pr.; 4 pin 3/6 pr.; 6 pin 4/- pr.; 8 pin 4/6 pr.; 12 pin 5/6 pr.; 18 pin 7/6 pr.; 24 pin 8/6 pr.; 33 pin 10/6 pr.

MINIATURE PYE COAXIAL PLUGS AND SOCKETS. Available male or female cable, per 2/6 pr.

7.5 K.V.A. AUTO TRANSFORMERS. 115/230 volts. Brand new, boxed, ex-U.S.A. £15 ea. Plus carr.

POST OFFICE TELEPHONE HANDSETS. Standard type, 12/6 ea. P/P 1/6.

A.R. 88 WAVECHANGE SWITCHES. 8 banks, 6 positions, complete with all screens. New, boxed, 17/6 ea. P/P 2/6.

AMERICAN HS-30 LIGHTWEIGHT HEADSETS. Res. 50 ohms. Extremely high quality. Brand new, 15/- pair. P/P 1/3.

AMERICAN SPRAGUE/MICAMOULD CONDENSERS. Highest quality, .1 mfd., 500 v. .01 mfd. 1,000 v. 6/- per doz. P/P 9d.

AMERICAN H.T. BATTERIES. Brand new Tapped 90 v., 67½ v., 45 v., 22½ v., 5/- ea. P/P 1/6.

PLESSEY 24 VOLT D.C. PUMPS

Self lubricating, capacity 60 g.p.h. at 30 lb./sq. in. Will operate O.K. on 12 v. ¼ BSP inlet/outlet union. Only 15/6 ea. P/P 2/6.

FIELD TELEPHONES TYPE F. Ideal for all intercom. systems, house, office, building sites, etc. Generator ball ringing. 2 line connection. Supplied complete with batteries and wooden carrying case, fully tested. £4/19/6 pair. P/P 5/-.

1,000 WATT MAINS ISOLATION TRANSFORMERS 230 v. primary, 230 v. secondary. Ex-Admiralty heavy-duty type. New boxed, £5 ea. P/P 10/-.

R.1155 COMMUNICATION RECEIVERS Standard Model B. Frequency coverage 75 kc/s to 1,500 kc/s and 3 mc/s to 18 mc/s on 5 bands. New improved geared slow-motion drive fitted. All receivers overhauled, aligned and tested. £8/19/6 ea. P/P 7/6. Combined A.C. mains power pack and audio output stage supplied 85/- extra.

BRAND NEW MEDRESCO HEARING AIDS Supplied fully tested and complete with earpiece, leads and battery pouch. Incorporates 3 sub-miniature valves and sensitive crystal mic. Only 32/6 each. Batteries 5/- extra. P/P 1/-.

BC.221 HETERODYNE FREQUENCY METERS 125 kc/s to 20 mc/s. As new condition. Supplied complete with valves and crystal but no calibration charts. Only £14/10/- ea. P/P 7/6.

FIELD TELEPHONES TYPE H. Ideal for all intercom. systems. Generator bell ringing, two line connection. Supplied complete with batteries, ready to operate, 62/6 each, P/P 3/6.

SPARES KIT FOR CR.100 RECEIVERS Contains 15 valves: 2–U50, 2–DH63; 2–KT63; 2–X66; 7–KTW61. Condenser and resistor packs, pots, toggle switch, output transformer, etc. All brand new, 59/6. P/P 3/6.

R.C.A. LOUDSPEAKERS High-quality 3 ohm speaker housed in black crackle metal case to match AR–88 or H.R.O. receivers. Supplied brand new and boxed, 45/- ea. P/P 3/6.

COLLARO STUDIO TAPE TRANSCRIPTORS Latest 1960 model 3 speeds, 1⅞, 3¾ or 7½. Fitted with 3 separate motors, digital counter, press-button switching, provision for fitting extra stereo head. Supplied brand new and guaranteed complete with spare 7in. spool, £12/10/- ea. P/P 3/6.

DON Mk. 5 FIELD TELEPHONES Ideal for all intercom. systems. Buzzer calling, 2 line connection. Housed in metal carrying case. Supplied complete with batteries, fully tested, 39/6 ea. P/P 3/6.

R.C.A. PLATE TRANSFORMERS Primary 200/250 v. 50 cycles. Secondary 2,000/1,500/0/1,500/2,000 v. 500 milliamps Supplied brand new and boxed, £6/10/- ea. P/P 10/-.

PARMEKO TABLE TOP TRANSFORMERS. Input 230 v. 50 c/s. Output 620/550/375/0/375/550/620 v. 250 mA., 5 v. 3 amp, 5 v. 3 amp. Size 6½ x 6½ x 5¼in. Brand new, boxed, 45/- ea. P/P. 5/-.

12/24 v. D.C. MODEL MOTORS. Reversible. Brand new, 8/6 ea. P/P 1/-.

200/230 v. A.C. MAINS MOTORS. Made for hair dryers. New, 12/6 ea. P/P 1/3.

E.M.I. 50 : 1 MICROPHONE TRANSFORMERS, 4/6 ea. P/P 1/-.

GERMANIUM DIODES. General purpose type, 6d. ea. High quality type equivalent to OA81, 2/- ea.

TRANSISTORS. Red spot, 3/6 ea. White spot, 3/6 ea. Yellow/green, 4/6 ea. Red/yellow, 7/6 ea. P/P 3d.

SPEAKER BARGAINS

2½in.	Perdio	3 ohm	17/6
2½in.	Perdio	15 ohm	17/6
3in.	Plessey	5 ohm	15/6
3in.	Rola	3 ohm	17/6
4½in.	Plessey	3 ohm	15/6
5in.	Goodmans	3 ohm	15/6
6½in.	Plessey	3 ohm	17/6
8in.	Elac	3 ohm	19/6
10in.	R.A.	3 ohm	27/6
12in.	Plessey	3 ohm	29/6
6 x 4in.	Plessey wafer	3 ohm	12/6
7 x 4in.	Plessey	3 ohm	15/6
8 x 6in.	Rola	3 ohm	17/6
10 x 7in.	Plessey	3 ohm	27/6
12 x 8in.	Plessey	3 ohm	49/6
8 x 2½in.	Goodmans	3 ohm	17/6

All brand new. Please add postage.

AMPHENAL 15 PIN UNITERS. Brand new 3/6 pr., ditto 18 pin, 3/6 pr. P/P 6d.

4 POLE 11 WAY METER SWITCHES. 4 bank 6/6 ea. P/P 9d.

LEACH 12 v. DOUBLE POLE AERIAL CHANGEOVER RELAYS. 7/6 ea. P/P 1/-.

SOUND-POWERED TELEPHONE HANDSETS. Just connect with twin flex for complete telephone system. No batteries required, 15/- ea. P/P 1/6.

INSTRUMENT TRANSFORMERS. 0/210/240 v. primary. Secondary 220 v. 85 mA and 6.3 v. 3.5 amps. New, 9/6 ea. P/P 1/3.

CONTACT-COOLED RECTIFIERS. 125 v. 85 mA 3/9; 250 v. 50 mA 5/6; 250 v. 85 mA 9/-; 250 v. 75 mA, full-wave bridge, 12/6. P/P 6d. ea.

HOOVER ROTARY TRANSFORMERS. Input 12 v. D.C.; output 310/360 v. 30 mA. New, boxed, 12/6 ea. P/P 1/3.

PORTABLE PRECISION VOLTMETERS Brand new moving iron instruments by famous manufacturer. Housed in polished teak case, 8in. mirror scale. 2 ranges, A.C. or D.C. 0 to 160 v. or 0 to 320 v. Accuracy within 2%. £3/19/6 ea. P/P 3/6.



E.M.I. LOW VOLTAGE POWER SUPPLIES. 200/250 volt input. Output 6 volts 3 amp. D.C. Fully smoothed. Compact chassis contains potted transformer and choke, 2 electrolytics and metal rectifier. Brand new, 35/- each. P/P 3/6.

HOURS OF BUSINESS: 9 a.m.-6 p.m. Thursday 1 p.m. Open all day Saturday. Please print name and address clearly.

LOOK! THOUSANDS OF BARGAINS AVAILABLE WHICH WE ARE UNABLE TO ADVERTISE IT IS WORTH YOUR WHILE TO PAY US A VISIT

BRAND NEW Boxed 100 MICROAMP METERS. Standard 2½in. flush panel mounting. Scale calibrated 0–100 microamps. 42/6 each. P/P. 1/3.
Also available 3½in. panel mounting 62/6 each.

MAINS PANEL NEON INDICATORS. Chrome escutcheon, flying lead connections. Available red, green or clear, 3/6 each. P/P. 6d.

ALUMINIUM CHASSIS. 18 swg. four sided, reinforced corners. All sizes 2½in. deep. 6 x 4in, 3/6; 7½ x 5½in. 4/6; 10 x 7½in. 5/3; 11½ x 7½in. 6/-; 13½ x 9in. 6/9. Post extra.

PARMEKO MAINS TRANSFORMER. Fine heavy duty job. Primary 0/110/230 volts. Sec. 350/0/350 volts 150 ma. 6.3 v. 4 amps, 5 volts 4 amps. New, boxed, 32/6. P/P. 2/-.

PRECISION WIREWOUND POTENTIOMETERS. Linear track, 3½in. dia. Available 100 ohm, 500 ohm; 1k, 2.5k; 5k; 10k; 25k; 50k and 100k ohms. All 10/6 ea. P/P. 1/-.

750 WATT AUTO TRANSFORMERS. Fine heavy Admiralty type. Tapped from 110 to 230 volts to give any spot voltage. 69/6 each. P/P. 5/-.

POTTED "C" CORE CHOKES. 16 H. 150 ma.; 20 H. 100 ma.; 16 H. 120 ma.; 20 H. 80 ma.; 100 H. 30 ma. All 10/6 ea. 5 H. 500 ma. 17/6; 10 H. 500 ma. not potted, 25/- ea. Post extra.

FERRANTI POTTED FILAMENT TRANSFORMERS. Primaries tapped 200/250 volts. 1. 6.3v. ct. 5.6 amp; 6.3v ct. 4.8 amp; 6.3v. ct. 1 amp.; 19/6 ea. 2. 6.3v. ct. 3.3 amp.;6.3 v. ct. 1 amp; 6.3v. ct. .9 amp; 6.3v. ct. 6 amp; 15/6 ea. P/P. 2/-.

POST OFFICE JUMPER LEADS. Screened twin lead fitted with two standard jack plugs, 3/- ea. P/P. 9d.

SIEMENS HIGH-SPEED RELAYS. 1700 + 1700 ohm coils. Single pole changeover. Miniature sealed type. New, boxed, 15/6 ea. P/P. 6d.

ROTARY TRANSFORMERS. 12 volt D.C. input. Output 250 volt 80 ma. 22/6 ea. Ditto 6 volt input, 22/6. P/P. 2/6.

CHOKE BARGAINS. 4H. 22.5 ma. 2/6; 5 H. 60 ma. 3/6; 5 H. 200 ma. 5/6; Collins 8 H. 100 ma. 8/6; Rich & Bundy 50 H. 120 ma. 12/6. Post extra.

HEAVY "C" CORE TRANSFORMERS. 230 volt primary. 725/700/675/0/675/700/725 volt 500 ma. 6.3 v. 6 amp. 6.3 v. 1 amp. 5 v 6 amp. New, boxed, 72/6 ea. P/P. 5/-.

FERRITE CORED LOOP AERIALS. Operative up to 2mc/s. New boxed, 22/6 ea. P/P. 2/6.

ADMIRALTY SLOW MOTION DRIVES. 180°, scaled 0 to 100. Fast and slow knob with lock and also flick mechanism for setting to fixed frequencies, new 7/6 ea. P/P. 1/3.

24 AMP. VARIAC TRANSFORMERS. Primary 230 volts. Adjustable sec. from 185 to 250 volts. 24 amps, £12/10/- each. P/P. 10/-.

"C" CORE POTTED L.T. TRANSFORMERS. Primaries all 230 volts.
1. 6.3 v. 3 amp. 6.3 v. 3 amp., 6.3 v. 3 amp., 6.3 v. 1.5 amp., 21/- ea. P/P. 2/-.
2. 6.3 v. 5 amp., 6.3 v. 4 amp., 2 x 6 6.3 v., 3 amp. 6.3 v. 2 amp., 6.3 v. 1.5 amp., 6.3 v. 1 amp., 35/- ea. P/P. 2/6.

VALVE VOLTMETERS No. 2. A laboratory instrument at a fraction of cost. Five ranges A.C. and D.C. 1.5 v., 5 v., 15 v., 50 v. and 150 volts. Operation 200/250 volts A.C. Supplied as new, fully tested and complete with internally mounted H.F. probe. £17/10/- each. P/P. 10/-.

HIGH FIDELITY P.V.C. BASE RECORDING TAPES
BARGAIN PRICES



3in. spool 225ft. L.P. 6/-. 5in. spool 600ft. std. 12/-. 5in. spool 900ft. L.P. 17/-. 5½in. spool 1200ft. L.P. 19/6. 7in. spool 1200ft. std. 19/-. 7in. spool 1800ft. L.P. 29/-.

SPARE PLASTIC SPOOLS, 5½in. 2/3; 7in. 3/6. New, Boxed, Guaranteed. Post extra.

HALLICRAFTER 6 VOLT VIBRATOR POWER SUPPLIES. Magnificent units housed in grey metal case and supplied with all necessary connectors, etc. Made for SX28, S27, S36 receivers, etc. Output 300 volts 170 ma., fully smoothed. Supplied new boxed, 29/6 each. P/P. 3/6.

AVO SIGNAL GENERATORS. Frequency coverage 95 kc/s. to 40 mc/s. Ideal for all general radio work. Supplied fully tested and checked. £7/19/6 each. Operation is from 2 v. and 60 v. batteries but original Avo mains units can be supplied at 19/6 ea. P/P. 3/6.

FIELD TELEPHONES TYPES L.
Ideal for all intercom systems. House, office or building site. Generator bell ringing. Two line connection. Supplied complete with batteries, fully tested. As new, 59/6 ea. P/P. 3/6.

8 RANGE SUB-STANDARD D.C. AMMETERS
Ranges 1.5, 3, 7.5, 15, 30, 60, 300 and 450 amps. 8in. mirror scale. Housed in polished teak case. Supplied complete with all shunts and leather carrying case, £15 each. P/P. 7/6.

PHOTO VOLTAGE AMPLIFIERS
These special units contain a 1 microamp. Tinsley mirror galvonometer and a double selenium photo electric cell. Brand new, £9/19/6 ea. P/P. 7/6.

RECORD CHANGERS/PLAYERS
Bargain prices, all new and guaranteed.
COLLARO CONQUEST. 4 SPEED AUTO CHANGERS. £6/15/- ea. P/P. 3/6.
B.S.R. UA84 SPEED AUTO CHANGERS £6/15/- ea. P/P. 3/6.
COLLARO JUNIOR 4 SPEED SINGLE PLAYERS. 79/6 ea. P/P. 2/6.



24 VOLT D.C. FUEL PUMPS.
Perfect condition, 15/6 ea. P/P. 2/6.



HALLICRAFTER S-36A U.H.F. COMMUNICATION RECEIVERS. This is the later version of the S-27. Frequency coverage 27 to 143 mc/s split on 3 bands, capable of receiving F.M. or A.M. signals. Circuit incorporates calibrated S meter, B.F.O., noise limiter, etc. Operation 110/230 v. A.C. Output for phone or speaker. Supplied reconditioned and in superb condition. Price £27/10/- each. P/P. £1.

NEW BLOCK PAPER CONDENSERS.
Nitrogol, Visconol types. .25 mfd. 4 kv. 3/6; .25 mfd. 7.5 kv. 10/6; .25 mfd. 10 kv. 15/-; 1 mfd. 600 v. 1/9; 1 mfd. 1 kv. 3/6; 1 mfd. 2.5 kv. 6/6; 1 mfd. 5 kv. 15/-; 2 mfd. 400 v. 2/6; 2 mfd. 600 v. 4/6; 4 mfd. 400 v. 3/6; 4 mfd. 600 v. 4/6; 4 mfd. 1,000 v. 6/6; 4 mfd. 1.5 k. 8/6; 8 mfd. 400 v. 6/6; 8 mfd. 800 v. 8/6; 8 mfd. 1.5 kv. 15/-; 10 mfd. 1.5 kv. 17/6; 32 mfd. 500 v. 17/6. Post extra.

CRYSTAL MICROPHONES
Brand new and guaranteed.
Type 1. Hand or desk type with screened lead. **ONLY 15/6** each. P/P. 1/-.
Type 2. High fidelity stick type, metal cased and fitted with switch. Supplied with screened lead and screened 2-pin connector. **ONLY 37/6** each. P/P. 1/-.

Type 2

Type 1

POTTED TRANSFORMERS. 230 v. primary Secondary 350/310/0/310/350 v. 220 ma. Total of 6.3 v. 13 amps.; 5 v. 4 amps., 49/6 ea. P/P. 3/-.
110/230 VOLT AUTO TRANSFORMERS. 20 watt 9/-; 50 w. 12/6; 150 w. 18/6. Post extra.
100 AMP. A.C. MOVING IRON METERS. 6in. scale. Modern type, flush mounting ideal for switchboards, etc., new, boxed, 65/-. P/P. 3/6.
"C" CORE E.H.T. TRANSFORMER. 230 v. primary. Secondary 3,850 v. 5.5 ma. 4 v. 2.5 amp., 4 v. 1 amp. New boxed, 52/6 each. P/P. 2/6
JOHNSON VARIABLE INDUCTANCES. Large type 8in. x 2½in. Supplied brand new boxed, 22/6 each. P/P. 2/-.

METER BARGAINS

20 microamp D.C. M/C flush rd. 2½in.	69/6
25 microamp D.C. M/C proj. rd. 2½in.	59/6
50 microamp. D.C. M/C proj. rd. 2½in.	49/6
100 microamp D.C. M/C flush rd. 2½in.	42/6
100 microamp D.C. M/C flush rd. 3½in.	62/6
200 microamp D.C. M/C proj. rd. 2½in.	29/6
300 microamp D.C. M/C flush rd. 2½in.	29/6
1 milliamp. D.C. M/C flush sq. 2in.	22/6
1 milliamp. D.C. M/C flush rd. 2½in.	25/-
1 milliamp. D.C. M/C flush sq. 4in.	69/6
30/0/30 milliamp. D.C. M/C flush 2½in. rd.	9/6
15 amp. D.C. M/C proj. rd. 2in.	8/6
120 volt D.C. M/C flush rd. 3½in.	32/6
300 volt A.C. M/C rectifier flush rd. 2½in.	25/-
300 volt A.C. M/I flush rd. 2½in.	25/-
500 volt A.C. M/I flush rd. 2½in.	25/-
1,500 volts electrostatic proj. rd. 2½in.	25/-

Postage extra.

G.W. SMITH & CO (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

G.W. SMITH & CO (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

39/6 CARRIAGE U.K. 10/6

SPECIAL OFFER
MINE DETECTORS No. 4A

For detecting Ferrous or Non-Ferrous Metals:— Underground Pipes—Cables—or any hidden metallic objects to a depth of 24in. at full signal. Or greater depths can be obtained at a lower signal strength.

Complete equipment comprises: Search Head, Amplifier, Headset, Control Box, Telescopic Rods for Search Head, Search Head Test Unit, Test Depth Measure and Holdall Haversack.

Complete equipment supplied in original transit cases, with circuit and operating instructions.
Batteries if required 8s 0d extra, 67½ volt/1.5 volt.

EMEC *THE INSTRUMENTATION PEOPLE*

VARIABLE VOLTAGE TRANSFORMERS

TYPE B5
5 amp. 260 v. output, as illustrated £8 10 0
TYPE B10
10 Amp. 260 v. output £17 15 0
TYPE B20
20 Amp. 260 v. output £32 0 0

Large easily read Dial calibrated 0-260 v. Totally enclosed with Input and Output Terminals. Ideally suited for Laboratory experimental work and Schools.

TRANSFORMERS & SATURABLE REACTORS

1va-30Kva to Specification.

COMPLETE INSTRUMENTATION INSTALLATIONS FOR INDUSTRIAL PROCESS CONTROL.

THE ELECTRONIC & MECHANICAL ENG. CO. LTD.
FORGE LANE, HALESOWEN, BIRMINGHAM

Telephone: Halesowen 2656
Telegrams. EMEC Halesowen, Birmingham

EXPORT ONLY
PROMPT deliveries Mobile V.H.F. Radio Telephones. Frequency ranges on five bands (1) 36–44 Mc/s, (2) 65–78 Mc/s, (3) 78–100 Mc/s, (4) 118–132 Mc/s, (5) 156–174 Mc/s. R.F. output 10 watts. A.M. Single Channel, crystal controlled. To operate from 6 v., 12 v. or Mains supply sources. Reconditioned with same as new guarantee. Prices from £55 per complete station FOB U.K. Port, as illustrated.

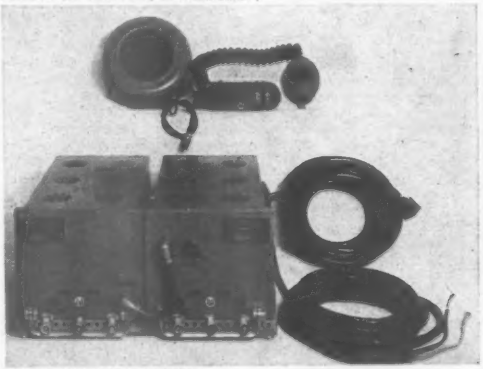

GENERALLY AVAILABLE
H.F. Radio Transmitters 300 watts Modulated R.F. Output.
H.F. Radio Telephones 1½–12 Mc/s, 25 watts R.F. Output.
Military Wireless Sets of very many types including Handy-Talkies.
Spares of all types for military equipment.
Field Telephones of all types, Switchboards and line components of British Post Office types.
Carrier Telephony Systems—Terminals and Repeaters—Components of all types.
V.F. Telegraphy Systems—Terminals and Repeaters—Components of all types.
Aircraft Radio Compasses, Distance Measuring Equipment and also 10-Channel V.H.F. Radio Telephones.

R. GILFILLAN & CO. LTD.
NATIONAL PROVINCIAL BANK CHAMBERS
29 SOUTH STREET, WORTHING, SUSSEX
Tel.: Worthing 8719 & 30181

RADIO CLEARANCE LTD.

TRADE ENQUIRIES INVITED

27 TOTTENHAM COURT RD., LONDON, W.1
The oldest Component Specialists in the Trade

Telephone: MUSEUM 9183
EST. 30 YRS.

FOLLOWING THE STUPENDOUS SUCCESS OF THE "MIRACLE"
WE NOW INTRODUCE FOR 1961
THE "CONTESSA"

A really remarkable 2-Band 6-Transistor Superhet Kit as displayed at the Radio Hobbies Exhibition.

Study these brilliant features which cannot be found in any other kit—the Contessa is the professional looking set with the professional performance.

- **Waveband coverage of 530 kc/s to 1,620 kc/s and 160 kc/s to 270 kc/s.**
- **Assured reception of at least a dozen stations in daylight!**
- **Large clearly-calibrated station-named dial.**
- **Internal high-gain Ferrox aerial.**
- **5 : 1 ratio slow motion tuning.**
- **Fitted with the latest 1200 line high-flux loudspeaker.**
- **Power of 410 milliwatts from the single-ended push-pull final stage.**
- **Specially designed aerial matching coil for use in a CAR.**
- **Only first grade fully-guaranteed Mazda matched transistors and diodes are used.**
- **Double tuned IF transformers for maximum gain and knife-edged selectivity.**
- **Fully drilled printed circuit panel marked with component numbers.**
- **The two-colour case measures 10 x 7½ x 3½in. and weighs approx. 4 lbs. when assembled.**
- **Battery lasts 4 months with normal usage.**
- **Book supplied with detailed assembly instructions, diagrams and circuitry.**
- **Anyone can build this set—everything supplied—just a soldering iron required.**

Inclusive price for all associated components, cabinet and battery, complete in every detail.
(or our BUY AS YOU BUILD SCHEME, any parts sold separately.
Send for comprehensive descriptive Manual and Parts List, 3/6 post free.)

£11-10-0
Plus 3/6 Regd. P.P.

MOULDED TROPICAL PAPER CONDENSERS

Small, non-inductive, insulated, high-grade Capacitors. 150 v. Wkg., .15 Mfd. 5% 10d. .22 Mfd. 10% 9d. 2 Mfd. 10% 1/10. 250 v. Wkg., .068 Mfd. 9d. .1 Mfd. 1/1. .22 Mfd. 2% 1/4. 1 Mfd. 10% 1/7. 500 v. Wkg., .680 pF., 1,000 pF. 1,500 pF., 2,200 pF., 7d. each. 3,300 pF., 8d. 5,000 pF., 6,800 pF., .01 Mfd. 9d. each. 8,200 pF., 1/-. .022 Mfd. .03 Mfd. 10d. each. .047 Mfd. 9½. .05 Mfd. 11d. each. .1 Mfd. 11d. .25 Mfd. 1/7. .5 Mfd. 1/8. 750 v. Wkg., 470 pF., 10% 820 pF., 1,500 pF., 2,000 pF. 9d. each. 5,000 pF., 6,800 pF., 9d. each. .022 Mfd. 10d. 1,000 v. Wkg., 1,500 pF. 9d. 6,800 pF. 10d. .01 Mfd., 1,500 v. 1/-. .12 Mfd., .15 Mfd., 1/1 each.

VALVE HOLDERS

4 pin UX. 7d. 7 pin Brit. Pax. 9d. 7 pin Brit. Porc. 4d. Int. Octal Pax. 9d. Internat. Octal McMurdo 6d. Mazda Octal Pax. 9d. Loctals Amp. 6d. B7G Pax. 6d. B7G P.T.F.E. 8d. B7G Cer. with saddle and valve retaining spring 1/-. B8A Pax. 4d. B8A Amp. 6d. B8A Cer. 8d. B9A Pax. 6d. B9A Cer. 10d. B9A Cer. with saddle and valve retaining spring 1/-. B9A Cer. skirted 1/-. B9A Cane. 6d. B9A printed circuit 10d. B7G Valve cans 6d. EY96 High Voltage holders 1/3.

VARIABLE GANG CONDENSERS

Twin Gang .0005 MFD. 2¼in. × 2in. × 1⅜in. Spindle ¼in 4/-.
Min. Twin Gang .0005 MFD. 2¼in. × 1½in. × 1⅜in. Spindle ¼in. 5/6 with Trimmers 6/6 and Dust cover 7/6.
AM/FM 2-Gang Condensers. 500+20 pF., 3/6.

DISC CERAMIC CONDENSERS 500 v. Wkg.

8.2 pF., 470 pF., 500 pF., .001 Mfd., .002 Mfd., .0025 Mfd. 003 Mfd., .005 Mfd. 6d. each. .01 Mfd 9d.

TRANSISTOR COMPONENTS

SUB MINIATURE ELECTROLYTIC CONDENSERS
Most with sleeves, all at 2/3 each.
.1 mfd. 50 v., .25 mfd. 15 v., .5 mfd. 50 v., 1 mfd. 10 v. 25 v., 2 mfd., 6 v. 15 v. 70 v., 4 mfd., 12 v., 5 mfd. 25 v., 6 mfd. 3 v., 6 v., 8 mfd. 3 v. 6 v. 15 v. 30 v., 10 mfd. 6 v. 25 v., 16 mfd. 3 v. 6 v. 30 v., 20 mfd. 15 v., 25 mfd. 12 v., 30 mfd. 3 v. 6 v. 12 v., 50 mfd. 6 v.

SUB MINIATURE TRANSISTOR COILS
Set of 3 I.F. Transformers 470 Kc/s plus Oscillator coil.
As specified for Mazda Circuits 23/6 complete.
As specified for Mullard Circuits 25/6 complete.
WTC oscillator Coils for Jackson or Plessey Gang 4/6 each. WTC 470 kc/s. I.F. Transformers 4/- each, 7/6 pair.

SUB MINIATURE CARBON POTS
8K., 50K., 220K., 330K., 1M. 2/-. 5M with switch. 4/6. 5K., 1/6, 500K preset 1/-. 1M Transistor Pots 2/-. 5K Transistor Pots 1/6.

FULLY MOULDED TRACK POTS
(Diameter ½in. SHORT SPINDLES) 2/6 each.
100Ω, 250Ω, 400Ω, 500Ω., 1k., 5k., 2.5k., 5k., 10k., 25k., 50k., 100k., 250k., 500k., 1M.

SUB MINIATURE METALLISED PAPER CONDENSERS ½in. × ½in. 100 v. working.
.005 MFD., .0022 MFD., .002 MFD., .001 MFD., 9d. each. .02 MFD., .04 MFD. Price 9d. each.

MIN. POLYSTYRENE CONDENSERS
10 pF., 30 pF., 39 pF., 75 pF., 82 pF., 100 pF., 125 v. wkg. 6d. each. 300 pF., 350 pF., 380 pF., 470 pF., 560 pF., 1,000 pF., 1,200 pF., 4,000 pF., 9d. each.

TV PRESET CONTROLS
Knurled knob and 6BA fixing holes. Diam. 1in. 100Ω 5K. 10K., 25K., 50K., 100K., 200K., 250K., 500K., 1.5M. 2M. 1/3 each. 25K. wirewound 1/6.

SWITCHES ROTARY
Size 1¼in. dia. 3in. spindles. Price 2/11 each.
1 pole 10 way. 1 pole 12 way. 2 pole 2 way. 2 pole 3 way. 2 pole 4 way. 2 pole 5 way. 2 pole 6 way. 3 pole 3 way. 3 pole 4 way. 4 pole 3 way.

POTMETERS CARBON—HI-GRADE
Moulded Tracks. Diam. 1¼in., ¼in. spindles. 5K., 10K., 25K. Linear only. 50K., 100K., 250K., 500K., 1M. 2M. Log or Linear, less switch, 2/6 each. With switch 4/6

TRANSFORMERS
Audio Output Types 5,000Ω to 3Ω 3/9. 20,000Ω to 3Ω 4/6.
Universal GRT Receiver with tapped primaries 2 v. 6.3 v. 12 v. 25% boost all taps, 10/6. Filament Transformers, centre tapped, 6.3 v. 1.5 amps., output, 5/9; 3 amps. 9/6. Charging Transformers, tapped all voltages 2 amp., 14/3· 4 amp. 16/6.

MODERN TV COMPONENTS
Ferrox Line O/P Transformers, 16 kV. U25 10/6. (90° Types 12/6) Frame O/P transformers to match 4/6. Scanning Coils to match 10/6. (90° types 12/6). Panel containing 6 preset pots 5/-. Smoothing Chokes: 2 Hy. 250 mA. 3/11. 1.5 Hy. 250 mA. 2/11. 1.3 Hy. 250 mA. 2/6.
G.E.C. Metal Rectifier 250 v. 250 mA. 10/-. 34 Meg. I.F.T. 1/6 ea. 38 Meg. I.F.T. (link) 2/- ea. Masks 14in., 17in. and 21in. 2/6, 3/6, 4/6 (plus 2/6 p.p.).

MISCELLANEOUS
Crocodile clips 4d. Cont. Plugs and Sockets 2/2 per pair. Condenser clips 1in., 1¼in., 1½in., and 1¾in. 6d. ea. Parmeko Smoothing Choke 8/9 Hy. 100 mA. 6/6, 500 pF. 15 Kv. moulded Condensers 2/6. WX2a Westector 6d. Transistor Twin gang condensers 357+166 pF. ex equip., 4/6. Vibrator Hash Chokes 1/-. Ext. Loudspeaker panel with switch 1/-.

We have an extensive range of Waxed Paper Condensers (average price 5d. each). Metallised Paper Condensers (average price 11d. each) and Wirewound resistors 5/6/7-watt tvpe (average price 1/- each).

All Electrolytic Condensers as advertised in May 1960 issue still available.

STAMPED AND ADDRESSED ENVELOPE with any enquiry please

PLEASE ALLOW FULL POSTAGE AND PACKING CHARGES

TERMS OF BUSINESS: CASH WITH ORDER OR C.O.D. ON ORDERS OVER 10/-.

LASKY'S RADIO

SAVE POUNDS! ORDER BY POST IF YOU CANNOT CALL

3-SPD. TAPE RECORDER

Complete with Microphone, Tape & Spool

Carr. & Ins., 25/-

29 GNS.

A complete Tape Recorder using Collaro Studio 3-speed Deck, 1⅞, 3¾, 7½ i.p.s. Twin track, with pause control, rev. counter, latest type electronic recording indicator. Superimposing switch, volume and tone controls, 7×4 loudspeaker, 4 watts output. Takes 7in. spools. In contemporary design carrying case, 9½ × 16 × 16in. Brand new, fully assembled ready for use.

TAPE RECORDERS

Largest stocks in London.

BRENELL, CLARION, COSSOR, ELIZABETHAN, ELEKTRON, FIDELITY, FI-CORD, FERGUSON, FERROGRAPH, GRUNDIG, HARTING, KORTING, MINIVOX, PHILIPS, REFLECTOGRAPH, SOUND, SIMON, STEELMAN, STUZZI, TANDBERG, TELEFUNKEN, TRUVOX, TRIX, STELLA, WALTER

SPECIAL OFFER OF TAPE

Famous make. P.V.C base on latest type plastic spools. Brand new, boxed and guaranteed. 1,200ft. on 7in. spool. **20/-**

1,800ft. on 7in. spool **32/6**
1,200ft. on 5½in. spool **21/-**
850ft. on 5in. spool **16/6**

SCOTCH PLASTIC TAPE
1,200ft. on 7in. spool **25/-**

M.S.S. LONG PLAY TAPE
1,800ft. on 7in. spool..... **32/6**
1,200ft. on 5½in. spool **22/6**
850ft. on 5in. spool **25/6**
220ft. on 3in. spool **7/11**

Post: 1 spool 1/6
Orders over 60/- post free.

ALL MAKES OF TAPE. Long Play, Double Play and American "MYLAR."

HIGH FIDELITY TAPE RECORDER HEADS

Leading make, new and unused. Upper or lower track. **RECORD/PLAYBACK**, high impedance. Double wound and will reproduce up to 12,000 c.p.s. at 7½ i.p.s. Azimuth adjustments. Output 5 millivolts at 1 Kc. at 7½ i.p.s. **ERASE**, low impedance. LIST £4 PAIR.

LASKY'S PRICE, per pair **29/6**
Post free

Please specify upper or lower track.

MICROPHONE BARGAINS

The "Diana," High impedance moving coil mike with unique magnetised table base. Response 30-15,000 c.p.s. Ideal for tape recorders. List 4 Gns.
Lasky's Price 55/- Post free.

ACOS CRYSTAL STICK MIKE

Type M.C.39/1, complete with cable. Listed at £5/5/-.
Lasky's Price 39/6 Post free.

MINIATURE moving coil dynamic microphone, incorporating switch and complete with pocket clip. As used for the "Fi-Cord," **35/-**
Post 1/6.

ALL TYPES OF CHASSIS

ARMSTRONG, DULCI, EMPRESS, etc. A.M. (1, m., s.) from ... **7 Gns.**
A.M./F.M. from ..... **14 Gns.**
A.M./F.M. STEREO from **22 Gns.**

Saville HI-FI EQUIPMENT

(STEREO & MONAURAL)

AT GREAT REDUCTIONS

For mains 200-250 v., 50-60 c/s. New and fully guaranteed, only slightly soiled. Very limited quantity.



SAVILLE STEREO SEVEN
Pre-Amplifier and Control Unit. Uses two EF86 and two ECC81 valves. Separate controls, bass and treble, balance and switched selector for various inputs.
List £15. **Lasky's Price £9/19/6**
Post 3/6.



POWER UNIT. Twin push-pull Amplifiers of 7 watts each. Freq. range 45 c/s to 28,000 c/s ± 1 dB. Distortion at 1,000 c/s and 7 watts <0.2%. Extra power supplies for Tuner. Five valves: four ECL82, one GZ34. List £33.
Lasky's Price £13/19/6
Post 7/6.

SPECIAL COMBINED OFFER
The Saville Stereo Seven Pre-Amp. and Power Unit, if purchased at the same time, **£23** Carr. 10/-.



SAVILLE TWENTY
Main Amplifier and Power Unit. 20 watts nominal, 30 watts peak from "C" core distributed load stage. Freq. range: 34 c/s to 30,000 c/s ±1 dB at 20 watts. Distortion at 1,000 c/s and 20 watts <0.1%. Mains transformer will sustain 100% overload continuously. Power supplies for Tuner: 300 v. 50 mA. 6.3 v. 2.5 amp. 4 valves: 2 EL34 push-pull, ECC81, GZ34. List £27
Lasky's Price £14/19/6
Carr. 9/6

SPECIAL COMBINED OFFER
Two Saville Twenty Amplifiers and one Saville Pre-Amplifier (as illustrated), if purchased at same time. **£36** Carr. 12/6.

LAST FEW! AVANTIC

STEREOPHONIC HI-FIDELITY EQUIPMENT

For 200-250 v. A.C. mains. New and fully guaranteed.

SP21/2. Stereo Pre-Amp. Control Unit **£16/19/6.** Carr. & Ins. 7/6.

DLT-35. Power Amplifier. **£16/19/6.** Carr. & Ins. 12/6.

Special Offer. One SP21/2 and two DL7-35, **47 gns.**, Carr. & Ins. 21/-.

PL6/21. 20 watt Monaural Amp. and combined control unit, **19 gns.** Carr. & Ins. 7/6.

STEP 11. Stereo P.U. Pre-Amplifier Unit, **84/-.** Carr. & Ins. 7/6.

HI-FI SPEAKER SYSTEM

Special Offer. Limited quantity ELAC Hi-Fi Speaker system comprising 10in. bass unit (woofer), 8 × 6in. enclosed middle range unit, and 4in. tweeter. **LASKY'S PRICE,** complete **49/6**
Post 3/6.

TWO MATCHED SETS FOR STEREO £5 post paid.

Units available separately:

10in. Bass Unit **27/6.** Post 2/6.
8×6 Middle Unit, **15/6.** Post 1/6.
4in. Tweeter **12/6.** Post 1/6.

NEW YEAR TAPE DECK SCOOP

The well-known MOTEK K10 Deck with push-button controls, 3 motors, 3-speed (1⅞, 3¾, 7½ i.p.s.), rev. counter. Freq. response better than 40-12,000 c/s. at 7½ i.p.s. 2-tone grey finish. Listed at £22.

LASKY'S PRICE **£9.19.6**
Carr. and Ins. 7/6.

SUITABLE CASE AVAILABLE, **39/6.**



COLLARO STUDIO TAPE TRANSCRIPTOR. 3 motors, 3 speed 1⅞, 3¾, 7½ i.p.s., takes 7in. spools. Push-button controls. **Lasky's Price** complete with Tape and Spool **£12/19/6.** Carr. & Ins. 12/6.

COLLARO TAPE TRANSCRIPTOR Mk. IV, fitted digital counter. List £25. **Lasky's Price £16/19/6.** Carr. & Ins. 12/6. Tape extra.

TAPE RECORDER AMPLIFIER

for use with Collaro Studio Transcriptor. Uses 3 valves, magic eye, contact cooled metal rectifier. Incorporates mike/gram/radio inputs, ext. l.s. jack, superimposing switch. Complete with gold/black knobs. Post 3/6.
12 Gns.

PLASTIC TAPE SPOOLS

3in.	5in.	5½in.	7in.	8½in.
2/9	2/9	2/9	2/9	5/6

7in. Metal Spools, 1/9 each.
Post extra.

"INSTANT" BULK TAPE ERASER

and Head Demagnetiser. Erases a complete reel of magnetic Tape in few seconds, **27/6.** Post free.

LASKY'S RADIO FOR COURTEOUS SERVICE & TECHNICAL ADVICE

RADIO · TELEVISION · HI-FI · ELECTRONICS · RECORDERS

LASKY'S RADIO

LONDON'S LEADING Hi-Fi SPECIALISTS

Visit either of our addresses for selective Demonstrations of the latest Hi-Fi Equipment, or send for our 100-PAGE HI-FI CATALOGUE, 3s. 6d., part post 6d

Fully refunded on making your first hi-fi purchase



7-valve AM/FM RADIOGRAM CHASSIS

Famous make. For 200-250 v. A.C. Output 4 watts matched to 3 ohms speaker. 7 valves: ECC85, ECH81, EF89 EABC80, EL84, EZ80, EM81, magic eye tuning indicator. Covers medium, long and FM bands. Length 12in., height 7¼in., front to back 8¼in.

LISTED AT 22 GNS. **LASKY'S PRICE** **£16/19/6**

Carr. and Ins. 12/6.
Available on H.P. terms.

4-SPD. AUTO-CHANGERS

New and Unused in Maker's Cartons

B.S.R. type UA8	£6 19 6
B.S.R. UA8, stereo	£7 19 6
B.S.R. UA12, stereo	£8 19 6
B.S.R. type UA14	£7 19 6
COLLARO Conquest, wired for stereo, with monaural p.u.	£6 19 6
As above, Stereo	£7 19 6

Post on all above 5/-.

GARRARD

Model 120	£8 8 0
Model 121	£9 9 0
Model 209	£9 19 6
Mdl. 210, Stereo	£11 11 0
Mdl. 210 with monaural and stereo heads	£12 10 0
RC.88	£12 19 6
RC.88 STEREO	£13 19 6
RC.98	£14 19 6

SINGLE PLAYERS

Auto start and stop. Complete with pick-up and crystal cartridge.

GARRARD 4SP **£6 19 6**

GARRARD TA Mk. II, wired for STEREO, plug-in head **£8 9 0**

E.M.I. 4-spd., wired for STEREO and fitted Acos stereo T.O. cartridge **£8 19 6**

Post on all above 5/-.

B.S.R. TU9, non-auto Turntable and separate Pick-up ... **79/6**

COLLARO JUNIOR 4-speed motor and separate pick-up ... **75/-**

Post free.

PICK-UP CARTRIDGES

ACOS HGP.59 or HGP.37 turnover crystal cartridge with L.P. and standard styli. List 39/7.

Lasky's Price **18/-** post free

ACOS 73-1A STEREO. List 52/6.
Lasky's Price 29/6 post free.

20,000 VALVES IN STOCK
Mullard, Brimar, G.E.C., Mazda, Cossor, E.M.I., Philips, Pinnacle, Telefunken, etc. Send for our latest Valve List.

STEREO AMPLIFIER KIT

Twin 4 watt (or 8 watt monaural), employing two ECL82 and EZ80 rect., double-wound mains transformer, etc. Separate panel with bass, treble and volume controls. Indkcator lamp, push-button on/off switch, elegant gold/cream knobs. Kit comprises two Amplifier Units and Power Unit, all 5in. × 2in. in size. fully assembled ready to be wired together. Kit is priced without Loudspeaker so that you can choose the type and size required.

LASKY'S PRICE for the Kit with 3 new Mullard valves **56/-**
Post 5/-.

Full data, circuit diagram, assembly instructions and suggested layout supplied.

SPECIAL OFFER OF SPEAKERS WITH THIS KIT

Two 5in. for **29/-**. Two 6×4, **25/-**.
CABINET. For an ideal cabinet see our offer at **69/6** on page 128.

TRANSISTOR RECORD PLAYER

CAN BE BUILT FOR £9.19.6 Carr. free

6 v. operation. For all L.P. and standard records. All components available separately.

AMPLIFIER

300 mill.watts push-pull output, using two OC71 and two OC72 transistors. Fully assembled, **79/6**. Knobs, 3/6 extra.

LOUDSPEAKER

30 ohms, 7×4in. elliptical, matched to Amplifier, **25/-**.

3-SPD. TURNTABLE

6 v., with rubber mat and speed adjustment, complete with t.o. crystal cartridge and two sapphire styli. **79/6**.

CARRYING CASE

As illustrated, handsome two-tone finish. 17in. deep, 14in. wide, 5¼in. high. Well made and finished. **49/6**.

Batteries extra.

STEREO ADAPTOR

CONVERTS ANY RADIOGRAM TO GIVE STEREOPHONIC REPRODUCTION

2-valve Amplifier using EF80X and EL84 metal rectifier (full-wave bridge). Mains voltage 195-250, 50/60 c.p.s. Ganged volume control and ganged tone control.

CAN ALSO BE USED AS A SINGLE-END AMPLIFIER.

LASKY'S PRICE complete with printed circuit, circuit diagram, full service data and 2 new valves. Post & Pkg. 3/6. **59/6**

SPECIAL OFFER. The above, plus Acos 73-1a Stereo Cartridge and 6in. or 8in. Loudspeaker, **95/-**. Post 5/-.

LASKY'S F.M. TUNER

PRINTED CIRCUIT VERSION OF G.E.C. 912 "F.M. PLUS" TUNER FOR HOME CONSTRUCTION

Uses 5 valves, 2 germanium diodes and brand new T.C.C. condensers. The PRINTED CIRCUIT ensures that the I.F. R.F. and amplifiers are extremely stable at maximum gain and results are consistent on all tuners.

CAN BE BUILT FOR 7 GNS. (including valves)
Post free.

ALIGNMENT SERVICE available.

TRANSFORMERS

Complete ranges in stock, mains and output by Partridge, Gilson, Parmeko, Ellison, Elstone, Douglas, etc., etc. Let us quote you.

TRANSCRIPTION MOTORS

GARRARD 4HF, stereo and monaural, complete with two plug-in heads	£18 9 0
Carr. & Ins. 12/6.	
GARRARD 301	£22 7 3
GARRARD 301 (Strobe)	£23 18 4
GARRARD type A	£21 7 8
PHILIPS	£10 10 0

Also Lenco, Connoisseur, etc.

"LINEAR" AMPLIFIERS

"DIATONIC" 10-14 watts	12 Gns.
"CONCHORD" 30 watt	15 Gns.
L45 4-5 watt Amplifier	£5/19/6
LT45 Tape Deck Amplifier	12 Gns.
L50 50 watt Amplifier	19 Gns.
L10 10-12 watt with pre-amplifier	15 Gns.
L3/3 Stereo Amplifier	7 Gns.

All other types in stock.

PRINTED CIRCUIT

GRAM AMPLIFIER

Uses two valves, ECL82 and EZ80 and separate mains transformer to minimise hum. Incorporates Elac 8 × 5in. loudspeaker with output transformer mounted. Concentric volume and tone controls. Size of printed circuit: 4×3×2¼in.
Lasky's Price **59/6** Post 3/6

P.M. SPEAKERS

ROUND

2½in.	4in.	5in.	6½in.	8in.	10in.
17/6	19/6	14/6	16/-	16/6	25/-

12in. 27/6

ELLIPTICAL:—

7×4	9×6	10×2½	10×6	10×7
14/6	22/6	25/-	25/-	25/-

Post extra.

THE 'VANCOUVER'

3-TRANSISTOR POCKET RADIO

Employs 3 transistors plus germanium diode, on printed circuit size 3½×4×¾in. Tunable over medium and long waves. Built-in Ferrite rod aerial.

CAN BE BUILT FOR 39/6 Post 1/6.

Circuit diagram and step-by-step instructions, 1/6 (free with parcel).

'EASY-SIX' 6-TRANSISTOR PORTABLE RADIO

CAN BE BUILT FOR

£9/15/- Post 3/-.

500 milliwatts p.p. output. Full medium and long wave coverage. Uses six first-grade Mullard transistors, 5in. loudspeaker, internal ferrite rod aerial with provision for car radio aerial. The printed circuit with component positions clearly shown, plus pre-assembled dial makes construction very simple. Smart blue/cream Vynide covered cabinet 8½×6½×3in. Uses PP7 battery (3/3 extra).

CIRCUIT DIAGRAM and full step-by-step instructions 1/6 (free with parcel).

STOP PRESS! AMPLIFIER BARGAIN

6 watt, employing 4 valves: EX80 rect., ECC83, feeding two EL84 in push-pull. Separate control unit with bass, treble and volume controls. Size of chassis: 4½×4½×1.4in. Complete with 4 new Mullard valves. **LASKY'S PRICE** **85/-**
Post 4/6.

SEE OVERLEAF FOR MORE NEWS FROM LASKY'S RADIO

LASKY'S RADIO

EVERYTHING FOR HOME CONSTRUCTOR & SERVICEMAN

★ *The largest and most comprehensive stocks of all components, test gear, etc., and the finest value in Great Britain.*

Send for the Finest Components Catalogue



packed with money-saving values for the "ham" or service man.

OVER 100 PAGES, SIZE 8½in. x 5½in. COPIOUSLY ILLUSTRATED.

Price **2/-** Post 6d.

Our latest 12-page "BARGAIN BULLETIN" free with each copy or available separately by post, price 6d.

LASKY'S MIDGET T.R.F.



CAN BE BUILT FOR

£4.19.6 Post & Pkg. 5/-

For A.C. mains, 200-250 v. Med. and Long wave. Uses 2 double-purpose valves EBF89 and ECL80 contact-cooled rectifier. 5in. P.M. Speaker. Plastic cabinet, 8½ × 5 × 4½in. deep.

FULL DATA, instructions, circuit diagram, shopping list, 1/6.

LASKY'S CAR RADIO

CAN BE BUILT ABSOLUTELY COMPLETE FOR £11.19.6

Post 3/6



★ Small size. Will fit any car.
★ 12 volt operation.
★ New Hybrid circuit.
★ Transistor output.
★ New Type Brimar valves.
★ No Vibrator, 12 volt H.T. & L.T.
★ T.C.C. Printed Circuit and Condensers.
★ Tuned R.F. stage.
★ Medium and long waves.
★ Permeability tuning.

★ 7in. × 4in. elliptical speaker. Instruction Booklet giving full details, illustrations, dimensions, circuit diagram and shopping list 2/6 (returned if you order).

12-CHANNEL TURRET TUNERS

Large selection, many by famous makers such as Cyldon, Braybead, Plessey, Cossor, etc., all I.F.s. New and unused. Let us quote you for the model required. Examples: 33-38 mc/s., **37/6**, 6-9 mc/s., **59/6**. 9-14 mc/s., **59/6**, 14-25 mc/s., **59/6**.

C.R. TUBE BARGAINS

NEW AND UNUSED



FERRANTI, 12in. types T12/44 or 9in. type T9/3 4 v. heater.

LASKYS' PRICE Carr. & Insur. 12/6. **49/6**

FERRANTI 17in. type TR17/10, 6.3 v. .3 amp. heater. Brand new and unused.

LASKY'S PRICE Carr. and Insur. 12/6. **£6.19.6**

16in. METAL CONE, famous make, type T901/A, 6.3 v., 0.3 amp. heater. Carr. & Insur. 21/-. **£6.9.6**

17in. 90 degrees C.R. TUBES

Seconds but in perfect working order and guaranteed.

Carr. and insur. 12/6. **79/6**

RE-GUNNED C.R. TUBES

GUARANTEED FOR 12 MONTHS

Type	From	Carr. & Ins.
12in. round	£5 10 0	12/6
14in. rect.	£5 10 0	12/6
15in. & 16 round	£5 19 6	12/6
17in. rect.	£5 19 6	12/6
21in. rect.	£7 19 6	21/-

BARGAIN OFFER OF CABINETS

Handsome contemporary style cabinet, polished veneer, dark walnut finish, complete with modern detachable legs with brass ferrules. Ideal for housing single or auto record player, tape deck and associated equipment. Overall dimensions. Height, including legs, 27in. Width 20in., Depth 15in. Length of legs, 15in. Motor board size 15½in. x 14in.

TODAYS' VALUE AT LEAST £8.

LASKY'S PRICE Carr. & Ins. 15/-. **69/6**

TRANSISTORS

P.N.P. Junction types.

AUDIO, suitable for high gain and low freq. amplifiers, and for output stages up to 250 milliwatts. Double spot—yellow and green. Each **5/-**

R.F. suitable for medium and low freq. oscillators, freq. changers and I.F. amplifiers (1.5 to 8 Mc/s.). Double spot—yellow and red Each **7/6**

Type T81. Suitable for all audio applications. Each **3/6**

Post 6d.

One dozen **36/-** post free.

Special prices quoted for large quantities.

OC44 **15/-**; OC45 **15/-**; OC70 **8/6**; OC71 **8/6**; OC78 **15/-** Matched Pair **30/-**; OC72 **14/-**; OC16 **54/-**.

EDISWAN MAZDA TRANSISTORS. The very latest types. XB/102 **10/-**; XB/103 **15/-**; XC/101 **12/6**; XA/101 **15/-**; XA/102 **17/6**.

SPECIAL OFFER. Set of 7 Ediswans Transistors: XA/101, XA/102, 2 XB/102, XB/103, 2 matched XC/101. Price **79/6**.

CRYSTAL DIODES. General Purpose GEX00, each **1/-**. Per doz. **9/-**. All other types in stock.

"GOLDTOP" POWER TRANSISTORS

All types in stock. Example:—
V15/10P. Ideal for output stage of car radio, will give approx. 3 watts operating from 12 v. Each **15/-** post free.
Suitable Output Transformer for above, correct ratio, matched to 3 ohms, **9/6**. Post 1/-.
Driver Transformer, **9/6**. Post 1/-.

RESISTORS. The largest stocks of all types, high stability, wire wound, carbon, vitreous enamel, miniature and sub-min. Millions in stock. Why buy unwanted assortments? We will send you the types and values you actually want.

LIMITED QUANTITY ONLY

NEW AND UNUSED 17" TV CHASSIS

200-250 v. AC/DC. Complete with 13 new Brimar valves, latest Fireball turret tuner covering all channels Bands I and III (i.f. 33-38 Mc/s.). Ferroxcube line output transformer and wide angle 90° scanning coils, ion trap, latest electrostatic focus. All first quality components. Printed circuit construction. Overall dimensions: 8in. × 15½in.

Valve line-up: 3 PCF80, 1 PCC84, 3 6BW7, 1 PCL84, PCL82, PY82, PL81, PY83, EY51.

LASKY'S PRICE **£18.19.6** Carr. & Ins. 7/6

Special Offer. Brand new Brimar C17SM 17in. C.R. Tube, .3 amp. heater, electrostatic focus, 12 months guarantee. List 10 gns.

LASKY'S PRICE **£6.19.6** Carr. and Insurance 12/6.

SPECIAL OFFER OF CHASSIS WITH ABOVE BRIMAR C.R.T.

£23.19.6 Carr. and Insurance 19/6.

CAR RADIO COIL PACK

(Superhet, I.F. 465 Kc/s)

As used in many famous makes car radios. A permeability tuned Coil Pack covering medium and long wavebands, with tuned R.F. stage and complete with dial and pointer. Needs no ganged condenser. Its compact construction and small size, 7½ × 5 × 1½in. enables it to be used in the smallest of car radios.

LASKY'S PRICE **49/6**

With circuit diagram and full data.

Post 2/6.

OPEN ALL DAY SATURDAY

Early Closing Thurs., 1 p.m.

(Both addresses)

TWO ADDRESSES FOR PERSONAL SHOPPERS

207 EDGWARE ROAD, W.2

PADdington 3271/2. Few yards from Praed Street

42 TOTTENHAM COURT ROAD, W.1

Nearest Stn.: Goodge Street. MUSeum 2605

Please address Mail Orders and Enquiries to Lasky's Radio, Dept. W, 207 Edgware Road, London, W.2.

SEE OVERLEAF FOR MORE NEWS FROM LASKY'S RADIO

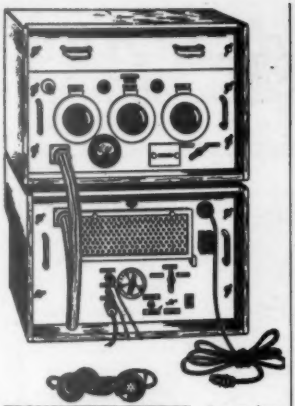

TRANSMITTER TYPE 36. A complete 50 watt TX for phone or CW. Covers 10-40 Mc/s. (10-15-20m.). Crystal or stabilised VFO. Push-pull 807's plate and screen modulate parallel 807's. Tested and ready to plug into AC mains. Complete with 16 valves, handset, operating instructions and circuit. Wooden cabinets may be somewhat damaged. £15 Carr. England and Wales £2.

MOVING COIL PHONES. Finest quality Canadian with chamois ear-muffs and leather-covered headband. With lead and jack plug. Noise excluding and supremely comfortable. 19/6. Post 1/6.
MATCHING TRANSFORMER (for Hi impedance) i.e. for HRO, CR100, etc., with standard jack plug, 4/6.

SELENIUM BRIDGE RECTIFIERS. Funnel cooled. A.C. input 45 v. RMS. D.C., output 30 v. 10 amps. BRAND NEW. Boxed. 45/-. Post 3/6.

MARCONI IMPEDANCE BRIDGE. Type TF373. Measures, L, C & R at 1,000 Cycles. Accuracy 1%. 0-100H; 0-100μF; 0-1M Ω each in 5 ranges. Power Factor and "Q." Guaranteed **£35.**

ADMIRALTY HT TRANSFORMERS Pri. 230 v. 50 c/s. Secs 620-550-375-0 375-550-620 v. (620 and 550 v. 200 m/amps., 375 v. 250 m/amps.), plus two 5 v. 3 amp. rectifier windings. Total rating 278 VA. Upright mtg. Wt. 25lb. Made 1953. **BRAND NEW.** Original boxes. 45/-. Carr. 5/-.

INSTRUMENT TRANSFORMERS. 230 v. A.C. input. Outputs 0-65-130-195 v. 85 m/amps., 6.3 v. 5 amps., 6.3 v. 0.3 amps. Shrouded. Size 3½ x 3½ x 3½in. high. 15/-.

HALLICRAFTER VIBRAPACK. Input 6 v. output 300 v. at 170 mA. Designed for 5X28 or 527. Size 6½ x 7 x 7in. **BRAND NEW, BOXED.** 29/6. Carr. 3/6.

AR88D MAINS TRANSFORMERS. Input 110-240 v. Output 345-0-345 v. 125 m/amps., 6.4 v., 4.5 amps., 5 v. 2 amps. 4½ x 4½ x 5¼in. high. Wt. 12lb. Potted. Tag ends. RCA BRAND NEW. Boxed. 29/6. post 3/6.



TRIPLETT METER MOVEMENT
This article consists of a basic 400 microamp meter movement mounted on a Bakelite panel 5½ x 2½. The dial is scaled as a 15 range Testmeter. A circuit and parts list of the original instrument is supplied.
BRAND NEW. Boxed. 35/-, post paid.

QQV06-40 37/6

PV1-35 32/6, 2D21 7/6, OC3 6/-, PT15 12/6, CV51(Y65) 5/-, 6F33 5/-, BRAND NEW in individual cartons. Bulk enquiries invited.

CANADIAN RECEIVER No. 52
1.75-16 Mc/s (19-170 m.) in three wavebands R.F., Mixer, Sep. Osc., 2 I.F.'s, Det/A.V.C., 1st Audio, Output, BFO (10 valves), plus a 3-valve dual Crystal Calibrator. Controls: R.F. Gain, I.F. Gain, Crash Limiter, C.W. Filter, Variable Selectivity, slow and Fast Tuning and Osc. Vernier Tuning. Man. or A.V.C. BFO pitch control. Internal 3in. speaker and valve check meter. Power supply required 160 v. H.T., 12 v. L.T. Data and Circuit supplied. A really excellent receiver, **£8/19/6,** carr. 15/6. Power supply Unit, 59/6, carr. 5/6.

SEARCH RECEIVER
Type AN/APR4. Covers 38 to 1000 Mc/s. with 3 Plug-in R.F. Heads. TN 16 (38-95 Mc/s.) TN 17 (74-320 Mc/s.) and TN 18 (300-1000 Mc/s.). Self-contained power supply for 115v. 50-2,600 c.p.s. Thoroughly reconditioned as new. In absolutely 100 per cent mechanical and operational order. **£100.**

MARCONI CR100
Completely overhauled. In perfect working order. LOOK LIKE NEW. **£21.**
Later model with Noise Limiter, **£25.**
Carr. England Wales 30/-. Send S.A.E. for full details.

RECEIVERS R-1155B
A first-class 10-valve Communications receiver, covering 75 Kc/s. to 18 Mc/s. (16.2-4,000 m.) in 5 bands. The large scale and superior dual ratio slow-motion drive make tuning easy and the R.F. stage and 2 I.F. stages ensure world-wide reception. All the receivers we sell have been thoroughly overhauled, completely realigned and are in first-class working order. ONLY **£9/19/6.**

A.C. MAINS POWER PACK OUTPUT STAGE. In handsome black crackled steel cabinet to match the R-1155. Fitted with RCA 8in. speaker. Just PLUG IN and switch on! Only the finest quality components are used and we guarantee OUR power packs for 6 months. ONLY **£6/10/-.** Deduct 10/- when purchasing receiver and power unit together. Send S.A.E. for further details or 1/3 for 10-page illustrated booklet giving technical data and circuits etc. (Free with each receiver). Add 10/6 carriage for receiver, 5/- for power unit.

RCA AR-88 SPEAKERS
A high quality 3 ohm unit fitted into heavy gauge black crackled steel cabinet, size 10½ x 11½ x 6in. Fitted with rubber feet and 6ft. lead. Ideal for extension speaker. CR 100. etc. In original cartons. BRAND NEW. 45/-. Post 3/6.

MINIATURE 373 IF STRIPS. For FM tuner described in "Practical Wireless." Complete with 3 of EF91, 2 of EF92 and 1 of EB91. A fresh release enables us to offer these once again. BRAND NEW. Complete reprint of conversion instructions and circuit supplied free. 35/-. OR less valves 12/6. Post, either, 2/6.

LOUD-HAILER EQUIPMENT
IDEAL FOR CROWD CONTROL, FACTORIES, PITS, ETC. CONSISTS OF 4 SPEAKER UNITS AND CONTROL UNIT. COMPLETE WITH MICROPHONE, HEADPHONE AND SPARES. OPERATES FROM 12 VOLTS D.C. (OR 6 VOLTS A.C. WITH SLIGHTLY REDUCED OUTPUT) CONSUMING ONLY 3 AMPS. OUTPUT POWER 5 WATTS. ALL TESTED AND WORKING, BUT SLIGHTLY SOILED. A GENUINE BARGAIN. **£4/10/6.** CARRIAGE 10/6.

T.C.C. VISCONAL CONDENSERS. 8 mfd. 800 v. D.C. wkg. at 71 deg. C. CP152V. Size 3 x 1¾ x 5in. high. **BRAND NEW.** Boxed 8/6 each, post paid.
4 mfd. 600 v. wkg. CP 130T. 4/6 each, post paid.

MINIATURE RELAYS (ALL BRAND NEW and BOXED)
G.E.C., sealed, wire ends, 670 2M2B H/D M1095..... 8/6
G.E.C., sealed, wire ends, 670 Ω, 2 H/D makes, M1099..... 15/-
G.E.C., sealed, wire ends, 5,000 Ω 2 c/o., plat., M1052 17/6
Siemens High Speed, 1K+1K Ω, 1 c/over..... 10/6

GIANT COMPONENT PARCEL
Contains 100 ½ and 1 watt resistors, 50 Hi Stab resistors, wire wound resistors, carbon and W/W pots, 100 capacitors (mica, paper, Sprague, bias, variable, etc.), valveholders, tag strips, metal rectifiers, sleeving etc. All components are unused. **GUARANTEED VALUE.** 25/- plus 2/6 post.

CHARLES BRITAIN (Radio) LTD.

11 UPPER SAINT MARTIN'S LANE
LONDON, W.C.2 *TEMple Bar* 0545
Near Leicester Sq. Station. (Opposite Thorn House)
Shop Hours: 9-6 p.m. (9-1 p.m. *Thursdays*). *Open all day Saturday*

CRYSTAL CALIBRATOR No. 10
A crystal controlled heterodyne wavemeter covering 500 Kc/s. to 10 Mc/s. (Harmonics up to 30 Mc/s.) Requires 300 V. 15 mA. and 12 V. 0.3 a. D.C., but can be easily modified for 120 V. and 1.4 V. working. Size 7 x 7½ x 4in. Good condition, complete with valves, crystal, instruction manual and circuit. ONLY 59/6. Post 3/6. This item available complete as above. **BRAND NEW** and with spare set of valves. **£4/10/-,** post 3/6.

CANADIAN CRYSTAL CALIBRATOR. Uses double crystal and multi-vibrator circuit to give "pips" at 1 Mc/s., 100 Kc/s. and 10 Kc/s. Incorporates Modulator Handbook supplied. 79/6, post 2/6.

PHILIPS RADIATION MONITOR. Type 1092C. A portable self-contained instrument for measuring radio-activity, uses the Mullard MX-115 Geiger counter tube, and is scaled 0-10 milli-Rontgens per hour. Supplied complete with carrying haversack. BRAND NEW. **£17/10/0.** Carr. 5/-. *Other types of radiation monitoring equipment in stock*

SANGAMO WESTON ANALYSER E772. A useful multi-range meter. Thoroughly overhauled and in perfect working order. For full details see previous adverts. **£7/10/-.** Carr. 4/6.

MARCONI TF987/1 NOISE GENERATORS. Range 100 Kc/s. to 200 Mc/s. Determines noise factor of AM and FM receivers. Fully stabilised H.T. supply A.C. mains operation. Brand new and in original boxes. **£15.** Carr. 7/6.

HEAVY DUTY SLIDER RESISTORS. 1.25 Ω 20 A., 12/6, post 3/6 1 Ω 12 A., 8/6.
PRECISION RESISTORS. 1 Megohm. 1% 1 watt wire wound, Ex-U.S.A. BRAND NEW. 10/6 per dozen.

D.C./A.C. CONVERTERS. Input 12 v. D.C. Output 230 v. 50 c/s. A.C. at 135 watts. Fitted with 0-300 v. A.C. 2½in. meter and slider resistor for voltage adjustment. In stout wooden carrying case with lid. Perfect working order. £9/19/6. Carr. 10/6.
24 v. Input 230 v. A.C. 50 c/s. 100 watts output. In grey metal case. BRAND NEW. 92/6. Carr. 7/6

FIELD TELEPHONES. Army type D, Mk. 5. Buzzer calling. Ideal for building sites, farms, workshops, etc. Complete with handset and batteries. Tested. 32/6.

MICROAMMETERS
R.C.A. 0-500 microamps. 2½in. circular flush panel mounting. Dials are engraved 0-15, 0-600 volts. As used in the American version of the No. 19 set. BRAND NEW. Boxed 15/-.
American 0-100 microamps. 2½in square flush panel mounting. BRAND NEW. Boxed. 42/6.

FERRANTI VOLTMETERS N.S.
0-300 volts, 25-100 c/s. Moving iron, 6in. scale. Fl. mtg. Hermetically sealed, grade 1N. Made 1955. BRAND NEW. Boxed. 79/6. Post 3/6

PROOPS Walk-around Store
and MAIL ORDER SERVICE

52 Tottenham Court Rd., London, W.1 • *Open 9-6, including Sats., Thurs. 9-1* • LANgham 0141

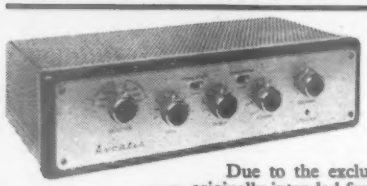

KIT OF BEAM-ECHO AVANTIC PARTS

Due to the exclusive purchase of a large stock of parts originally intended for the Beam-Echo Avantic combined stereo control unit and power amplifier SPA.11 we are able to offer a kit of all the parts necessary to build this superb piece of equipment—complete to the last nut and bolt, with specially prepared assembly instructions, full circuitry and wiring diagrams, plus a full copy of the handbook—at the BARGAIN PRICE of **£11 plus 7/6 carriage.**

Abridged Specification. Two 7 watt channels switchable for either stereo or 14 watt monaural. Wide-range bass and treble controls, channel and phase reversal. Main and pick-up balance controls. Separate output on each channel for tape. 100-245v mains. Mains outlet socket and tuner power supply provided. Two p.u. and two tape and tuner inputs. 4, 8, and 16 ohms output. Six valves and bridge circuit metal rectifiers. 2xECC83 and 4xECL 82. Less than 1% total distortion at 7 watts. Hum and noise 70 dB.



TELEVISION OSCILLOSCOPE

Release of a small quantity of the latest version of the well known APN-4 Indicator Unit from the American Loran Airborne radio navigation system. This provides a golden opportunity to make a serious television servicing and development tool as described in the *Wireless World*.

This is a nice looking piece of equipment with a really businesslike inside. Steel, double-decked chassis with fully screened 5CP1 tube in the centre, all high-grade capacitors and resistors, separate tag boards and layout diagrams for individual sections, etc. Modern circuit technique centred around one type of valve (15 of 6SN7 double-triodes and 8 of 6H6, plus three 6S7 and one 6SJ7), and RCA. 100 kcs Crystal.

Brand New, with Wireless World article, carriage paid **£6:10.**

RF EHT POWER UNIT 846

A small, very neat, lightweight unit of most modern construction providing 1000 volt DC from rectification of self-generated AC. Unit employs a 6C4 oscillator and an EY51 EHT rectifier and incorporates its own HT and EHT smoothing. Requires only 12 or 24v DC for filaments and 250 volts of raw AC to provide the EHT for an oscilloscope etc. Unit also contains a 6J6 arranged as an independent multivibrator with its inputs and outputs connected to a Breeze multisocket on front panel. Size: 4½ x 5½ x 5¼in.

Brand New, complete with valves and circuit ... SNIP ... **25/-** ***post paid.***



WALKIE-TALKIES Type 46

This is a later type than those previously available. A really serious job of sound design, crystal controlled, 10 mile range, transmitter and receiver covering any one frequency between 4125 and 7100 kcs in 25 kcs steps with standard crystal supplied—or any spot frequency between 3600 and 9000 kcs with special crystal supplied to order. Brand new, complete with headphones, throat mic., whip-antenna, plugs and leads. Size: 12 x 4 x 6½in. Weight 8½lb.

Price, with standard crystal ..... **£3/10/0** *carriage paid*
with chosen spot frequency crystal ..... **£7/15/0** *carriage paid*
Batteries required: 150, 15, and 3 volts. Transistorised converter to operate from 6v. or 12v. D.C. ..... **£8/10/0** *extra*

ARTI3 TRANSMITTERS. 100 watt **£18/0/0** *carriage paid*

SCR 522 TRANSMITTER RECEIVER

Well known American airborne equipment covering 100 to 156 Mc/s. BC625 transmitter has a 6G6 Crystal oscillator with the 2nd harmonic fed to a 12A6 and an 832 tripler stage and finally to an 832 power amplifier giving 8 watts. The BC624 superhet receiver has a 9003 RF and Mixer, three 12SG7 12 Mc/s IF's, 12C8 Detector, 12J5 Audio, and 12AH7 oscillator using 8 to 8.72 Mc/s crystals. AVC, Noise Limiter, and Squelch provided. Output transformer provides 50, 300 and 4,000 ohms. Successful conversion to 2 metres was fully described in CQ. Circuit diagram (unmodified) supplied. In good used condition.

Receiver, less valves, post paid. **10/-** *Transmitter, less valves, but including modulation transformer, post paid.* **15/-**

POST PAID VALVE BARGAINS

7Z4, EY91, 6AM5, 6AM6, 6C4, 6AL5, CV71 (neon stabiliser)..... any 4 for **10/-**
6SN7 ... 4 for **12/6**; TT15 ... **32/6**; QVO.4/7 ..... **9/6**
Brand New CV.139A CRT. **£1**
STC Miniature Silicon Diodes, 50 volt Peak Inverse. Output 15v. 0.5A, DC **3/6**

POST PAID TRANSISTOR BARGAINS

OC.170 **27/6**; OC.16 **37/6**; Goldtop V30/10DP... **21/-**
Also leading make of 3v transistors ..... 4 for **10/-**

CARPENTER POLARISED RELAYS

Type 5C9. Two 1685 ohm coils ..... **19/6** each
Type 5I9. Two 68 ohm coils ..... **15/-** each

G.E.C. SEALED RELAYS

5,000 ohm double-pole changeover **12/6**
670 ohm four-pole changeover **10/-**

TRANSISTOR AMPLIFIER KIT

Printed circuit, 500 milliwatt push-pull output. Input and output transformers of 3 ohms impedance with two OC.71 and two OC.72. Supplied complete with all condensers, resistors, volume control, etc. Input 9 volts. for only **52/6** post paid

MAINS TRANSFORMERS

200-250 volt 50 c/s. post paid

Type 1.	250–0–250 at 70mA.	6.3v at 2A. 4v at 2A.	9/–
2.	300–0–300 at 70mA.	6.3v at 2.5A. 5v. at 2A.	10/–
3.	350–0–350 at 120mA.	6.3v at 3.5A. 5v at 2A.	16/6
4.	350–0–350 at 300mA.	6.3v at 8A. 5v at 2A plus 4v at 2A and 6.3v at 2A.	27/6
5.	Filament only:	6.3v at 4A.	8/–

CRYSTALS Type FT. 243

Set of 80 covering 5706.667 to 8340 kcs in 33.333 kcs steps.
Complete set ..... **£4/3/6** post paid
Any one between 7006.667 & 7173 kcs, or above 7973 kcs ... **6/6** each
Any Three others ..... **10/-** post paid
Set of 120 covering 5675 to 8650 kcs in 25 kcs steps.
Complete set..... **£6/4/0** post paid
Any one between 7000 to 7300, or 8000 to 8300 kcs ..... **6/6** each
Any Three others ..... **10/-** post paid

AMERICAN 400 CYCLES INVERTER.
30/- post paid.

Very neat unit indeed, only 2½ dia. by 4in. long on 1½ in. high pedestal base containing suppressor. Ball bearings. 24 volt D.C., input for 26 volt single phase A.C. 6VA output. Instrument quality — as used with Bendix Magnesyn compass system.



LOW INERTIA INTEGRATING MOTORS

Precision made, high-efficiency, permanent magnet DC motors employing jewelled bearings and gold brushes that sufficiently eliminate brush-contact voltage-drop and friction and iron losses to provide a linear voltage/speed response that enables very small voltages to be integrated over time. Made by Electro-Methods, of Stevenage, these units are assembled to a robust aluminium faceplate which forms a type 1000 gearbox with a 5 : 1 ratio through fibre and brass reducing gears to a double ball-bearing spindle terminating in a small bevel gear. Low inertia motors are suitable for use in instrument-type servo-mechanisms for driving light loads, operating mechanical counters, or as small power generators. Nominally of 2,000 r.p.m. at 24 v., they have an off-load starting voltage of 79 millivolts at 95 micro-amps. With an armature moment of inertia of 1.8 gram. cm. squared they are so sensitive that they will operate directly from a photo-cell or thermo-couple.

Brand New, in original wrappings. **£4-10** post paid.

Cold Cathode Trigger Tubes



A sub-miniature cold cathode valve developed by Ericsson primarily for computor work, these GTR.120W tubes have great possibilities in a number of experimental electronic automatic control circuits. They have an Anode-Cathode running voltage of 95 to 140 at 4.5 mA, and at 290 anode volts require a trigger current of only 250 microamps to cause the anode to take over the discharge. Typical ionizarion time = 90 micro-seconds. They will withstand up to 310 v. with zero trigger voltage without self-igniting.

Supplied complete with full performance data in original packs of 100 at the Special Price of **£5** per 100 post paid.

CHROMEL/ALUMEL THERMOCOUPLE LEADS

7, 10 and 21 foot lengths of flat twin lead—90% nickel, 10% chrome and 95% nickel, 5% aluminium. Total resistance 0.875 ohms. For use with millivoltmeter to read 0 to 1,000°C. Sheathed in heat resisting silicon rubber that will stand 200°C. Price, post paid, 7/6, 10/6 and 21/- respecitvely.

BC.929 SCOPE UNIT

Neat, modern indicator unit especially suitable for quick conversion to attractive general servicing scope. **(Suitable circuit diagram and all component values supplied.)** Contains fully mu-metal screned 3BP1 tube, intensity and focus controls, 3-position rotary switch and 8 pre-set, potentiometers, plus 2×6SH7, 2×6H6, 6G6, 6X5 and 2X2 valves. Designed for 24 v. D.C. or 400 c/s A.C. input. Size 14 × 8½in. square. Well known and deservedly popular buy. Offered new, less (unwanted) motor driven aerial switching unit, for post paid. **50/-**

200/220v. D.C. to 200/250v. A.C.

New 200-watt D.C. to A.C. rotary inverters in sound-proof cabinet. **£9/10/-** *carriage paid.*

NOMOTRON DECADE COUNTER TUBES

STC Type G10/241 latest type cold cathode, gas-filled, single pulse, uni-directional decade counter which illuminates numerals on tube face. Operating range—20 kc/s. Cathode output 40 volts, 3.7 mA. HT supply 310 v. plus. Applications include: tachometers, counting and batching, frequency and time measurement, direct operation of electro-magnetic relays, sequential monitoring of up to 10 different waveforms, etc. Brand New, complete with special base and instructions. **32/6** post paid.

ROTARY RELAY. Superb, fast acting, brand new precision unit made by Price for RCA. Nominally 12 volt, but mighty lively on 6-volt supply. Two heavy duty single pole changeover contacts and one low current for external circuits, plus one break set that extends coil winding to reduce initial energising current to 50 mA. (at 6 v.) for holding. Solid milled armature, laminated steel frame, 2½ × 2½in. ¼in. thick, moulded inset dielectric block.
A highly recommended spares box buy at 7/6 each, *post free.*

VENNER TIME SWITCHES

Type T.S.2, first grade precision time switches as supplied to G.P.O. Comprises absolutely silent, self starting, 250 volt 50 c/s synchronous clock mechanism totally enclosed in heavy gauge brass case. Central drive takes detachable dial that revolves to operate sensitive on and off trips for external mains operated circuit. Self contained clock is easily detachable from rear mounting panel (self starting down to 80 v. and keeps running down to 15 v.).
Brand new, in original packings, and with dial and adjustable stops, post paid. **37/6**

400 CYCLE CHOPPER

Latest version of U.S.A. Servomechanisms 400 c/s chopper. High quality 6 v. vibrator oscillating between twin contacts for chopping external circuit. Hermetically sealed in octal based can.

Brand New **£2** *post paid.*



HIGH QUALITY POWER PACK

Admiralty Rectifier Unit Design 95, totally enclosed in heavy gauge attractive light grey case size 11½in. high × 6in. wide × 14in. deep. Admiralty ratings: transformer 400–0–400 at 50mA, 6.3 v. at 1 Amp, 5 v. at 3 Amp for 5U4G. Insulation tested to 3 kV. Two 350 ohm 20 henry 80 mA chokes; Two 4 μF at 600 v. ceramic terminal square canned paper smoothing capacitors. Double pole mains switch, two 2A fuses and two spares all in screw-in holders on front panel. 3-pin 250 v. 50 c/s mains input, and 3-pin output with matching plug on short screened cable providing 650 v. D.C. and 6.3 v. A.C. with common earth. An unusually neat, attractive, high quality unit. Brand New, still boxed for only **50/-** carriage paid.

Brand New, Individually Tested, Fully Guaranteed

LOW-VOLTAGE, HALOGEN-QUENCHED, GEIGER-MUELLER TUBES 25/- *post free*

Working voltage 400–450. Highly sensitive. Effective length 11.8 cm Background count 90/minute. Response 30,000 counts/minute. 80-volt plateau. Standard British 4-pin base, stainless iron electrode. Ideal for basic experimentation and instructional demonstration. Circuits of simple all transistor and conventional valve counter circuits supplied on request with each tube.

I-30-A SIGNAL GENERATOR 100-156 Mc/s

Modern, portable, battery operated, 5 valve Signal Generator with alternative crystal or master oscillator, either optionally modulated by 1,000 c/s Hartley oscillator. Large directly calibrated dial with precision slow motion drive. Five step and variable attenuator. Supplied with matching black crackle carrying case for 6 and 135 volt batteries with 10ft. supply cable, and metal cased 1 mA. test meter for checking crystal resonance, etc. Brand new. **£2/17/6** *plus* **7/6** *packing and carriage.*

I-95-A FIELD STRENGTH METER 100-156 Mc/s

Self-contained, tunable-input, valve-voltmeter with telescopic aerial and battery-fed diode rectifier and pentode amplifier for measuring field strength, presence of modulation, and approximate frequency of transmitter. Compensating circuit for state of 1½ and 45 volt batteries. In attractive black crackle case. Brand new.
£2/5/- *plus* **5/-** *packing and carriage.*

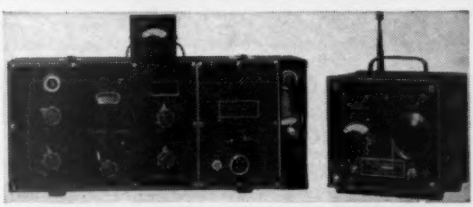

PROOPS BROTHERS LTD., 52 Tottenham Court Road, London, W.1
Head Office and mail order enquiries LANgham 0141
Shop hours 9 a.m. to 6 p.m. Thurs. 9 a.m. to 1 p.m. OPEN ALL DAY SATURDAY

POST FREE SNIPS

Double pole knife changeover switch on porcelain base. 2 for 5/-
G.P.O. 230 volt mains, twin six inch gong, outdoor bells..... 33/6
Siemens high-speed relays. 1,000–0–1,000 ohm coils..... 8/6
Pyrex Aerial Insulators. Four 3in. OR one 8in..... 7/6
U.S.A./British co-ax. adaptors. Four for..... 5/-
Neons. Ten 115 volt for 12/6; Six 80 volt for..... 7/6
G.P.O. mechanical counters, 0-9999 ..... 7/6

RECEIVER TYPE 88 (R1475)

Highly stable, specially accurately calibrated, Marconi design, RAF communications receiver covering 2-20 Mc/s in 4 bands with built-in 600 kcs Xtal reference oscillator for checking dial which can be reset by special panel trimmer control. 11 Valves: 3x6K7, 6K8, 6J5, 3x6Q7, 6H6, Y63 tuning indicator and VR150-30 voltage regulator. Two stage IF with 8 tuned circuits, Xtal controlled B.F.O. Four position selectivity with audio filters for narrow bandwidth C.W. Fast and slow AVC, high and low noise suppression. A plug-in unit with additional mixer provides a "listening through" guard channel of either 2-4 or 4-7½ Mc/s. Receiver 16½ × 9 × 11in. Power pack 8 × 9 × 11in. Complete with 200-250 volt AC (or 12v. DC) power pack type 360, and operating and alignment instructions. Used, but in very good condition. Guaranteed serviceable. A sound buy indeed at **£13.10.0** carriage paid.

ETCH-YOUR-OWN PRINTED CIRCUIT KITS 21/- Post Free

Each contains over 60 sq. in. of laminated board and sufficient chemicals to make dozens of printed circuits, plus comprehensive instruction book giving advice and examples on translating theoretical circuits into layouts ready for etching. High-quality materials—completely safe to handle—carefully prepared to ensure fine definition and uniform results without laboratory control.

£10 GEIGER COUNTER

Circuit embodies U.K.A.E.A. patent. Specially moulded case. Currently being supplied throughout the world. Three ranges—highly sensitive—light—portable—visual and audible response—plus output socket. Ideal for introduction to radiation measurement and nucleonic circuitry. Specially written 40-page instruction manual supplied. Batteries £2/15/3 extra.

KIT OF PARTS £4/17/6

Identical parts. Guaranteed performance. Manual and printed circuit plates for battery pack supplied (assembled pack £2/15/3 extra). Fully illustrated assembly instructions. Spares and service permanently available.

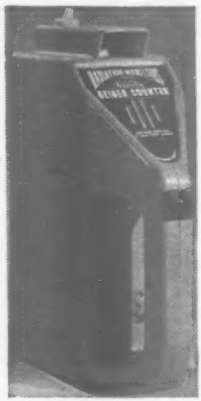



PORTABLE A.C./D.C. GENERATING SET

Self-contained 80 watt unit on compact chassis delivering 12 to 18 volts D.C. Size only 14 × 15 × 8in. Weight 46lb. Spring mounted air cooled petrol engine with fuel tank in base driving integral generator that has heavy duty bridge rectifier feeding D.C. terminal board. Miniature sparking plug. Filtered air intake. Guaranteed serviceable. **£9** plus 10/- carriage.

PROOPS
BROTHERS LTD.

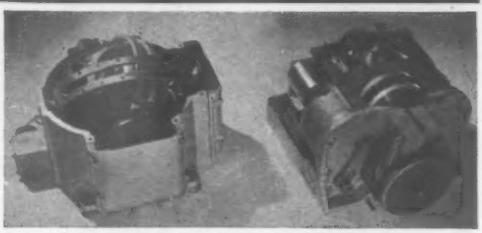

D.C. GYRO & SERVO MOTOR—CI AUTO PILOT

Beautifully engineered Minneapolis-Honeywell precision gyro, totally enclosed in sealed light-alloy housing about 8½in. cube. Automatic erection and precession correction. Large diameter Dessyn type transmitting potentiometers provide signals corresponding to the magnitude of the deviation of gimbal arms. Powerful D.C. motor coupled through a differential reduction gear to a 4in. spur driving gear integral with a 3in. dia. spiral groove cable driving drum. Two powerful solenoid clutches and corresponding brakes hold drum rigidly in position or set free for "neutral." Nominally for 26-volt operation, but operates at 12 volts. Size 10 × 6 × 8in.
£10 each unit or **£17/10/-** pair, carriage paid.

This is the attractive lightweight American Radio Altimeter that superseded the British version. A complete 14-valve radar set covering 420-460 Mc/s it is ideal for conversion to radio control of models or 70 cm. work. It embodies three self-contained sub-units in separate detachable aluminium cases, as follows:

TRANSMITTER/RECEIVER APN-1

TRANSMITTER
A push-pull feed-back oscillator tuneable either side of 445 Mc/s., frequency modulated at 100 c/s by a particularly robust moving coil transducer. Two 955 high frequency acorn valves. Case size only 3½ × 6½ × 2in. plus 2 × 2½in. dia. for transducer.

RECEIVER
Tuneable to transmitter frequency. Size 3½ × 6½ × 2in. Two 9004 acorn valves.

AUDIO AMPLIFIER
Self-contained RC coupled 12SH7, 12SH7 and 12SJ7. Size 3 × 5 × 1½in. Amplifies the received signal which is passed to detector circuit giving a D.C. voltage proportional to the difference between the transmitted and received (reflected) signal to operate internal relays which pass appropriate correction signals to autopilot and supply external indicator (5 mA meter).

MAIN CHASSIS
The main chassis carries the 3 sub-units and has a further three 12SH7 one 12SJ7, two 12H6 and one VR150 regulator, three 1% wire-wound resistors, one 4-pole changeover relay, two SPCO relays, three twin-ganged pre-set potentiometers, trimmers, fuses, etc.
Power supply is derived from a 27-volt dynamotor (charging rate for 24 v. supply) delivering 285 volts at 75 mA.

BRAND NEW, a very useful buy indeed at only **£2** plus 7/6 carriage.

200 AMP D.C. GENERATORS

These relatively small but really heavy duty generators were designed for a continuous output of 200 amps at 29 volts and are very successfully employed as a portable welding plant when driven from a tractor take-off pulley or separate engine as required. Guaranteed fully serviceable. Only **£6.15** carriage paid.

PROOPS
BROTHERS LTD., 52 Tottenham Court Road, London, W.1.
Head Office and mail order enquiries LANgham 0141
Shop hours 9 a.m. to 6 p.m. Thurs. 9 a.m. to 1 p.m. OPEN ALL DAY SATURDAY

PRECISION SIGNAL GENERATOR CT53. A modern laboratory standard instrument still in current use



FEATURES

- Vernier tuned, Triple screened, 6-Band coil turret covering 8.9 to 300 Mc/s with 72 ohm output from 100 mV down to 1μV.
- Precision decade ladder and silver slide wire attenuator calibrated in voltage and 0–90db.
- Variable carrier level monitored by cathode follower and VTVM.
- CW or modulated 30% by 1,000 c/s Sine or Square wave (variable mark/space ratio).
- External mod, by sine wave from 50 c/s to 10 kc/s. or pulses down to ¼μ Sec.
- Seven B7G Valves, Potted "C" core transformers, Paper capacitors, Stabilised H.T.
- Selected spare oscillator, pre-aged spare monitor, 100μA meter.
- Mains, H.T., Bias and Filament supplies fully RF filtered.
- Combined cabinet/rack mounting case, Pressure sealed, Desicator, Panel Mains voltage adjustment, Triple fused, in fact, "the lot"!

Offered straight from Service use, complete with calibration book, cables, circuit diagram and principal technical information, checked serviceable and fully guaranteed. Plus 15/- for careful packing and carriage **£17.10.0**

TWIN TUBE CRT INDICATORS

Attractive, lightweight, black crackle box 11 × 7 × 13½in. deep with 4 × 2½in. and 3½ × 3in. square windows on front panel for twin 5FP7 tubes. Neat arrangement of appropriate (independent) controls and variable scale illumination. Totally enclosed detachable magnetic focusing coils. All connections to rear sockets. Ideal TV monitoring unit as used by many amateurs. Used, but in very good condition, tubes guaranteed O.K. £1/10/0 carriage paid.

PORTABLE POWER



Neat, lightweight but really sturdy petrol engine. Completely self contained, air-cooled pedestal-based unit with 5in. dia. × ½in. Vee pulley for driving generator, pump, etc. Made by Lauson Engines in the U.S.A. for easy transport in a special lightweight container. Developing 1.8 h.p. at 2,700 r.p.m., this very fine unit is only 17in. high × 14in. × 12in. and can be carried in one hand. It has stellited valves to suit any petrol, a totally enclosed carburettor with air filter and a mechanical fuel pump with glass bowl filter. Flywheel cord start. Push-button stop. Adjustable throttle. Butterfly choke, etc. Standard 14 mm. spark plug with screened H.T. harness. Crankcase oil bath. Supplied complete with 3ft. flexible exhaust pipe and detachable 9 × 3½in. dia. silencer, driving belt and 10ft. of high-grade flexible fuel hose. A genuine quality engine offered at the remarkable price of only **£17.10.0** carriage paid (inland only).

3-INCH CIRCULAR SCALE MILLIAMMETER

American panel mounting "Radio Altitude" meter with modern (coil round magnet) movement giving beautifully steady deflection to reading on large dial boldly marked 1 to 4 with sub-divisions in tenths. Supplied with suppressed zero which requires 6.5 mA. for full scale deflection (0 = 1.5 mA.) but pointer is easily re-set to zero by moving conventional hair spring adjuster behind dial, when 5 mA. gives f.s.d. Rear housing incorporates on/off switch (operated by rotating small knob on front face) and 5-pin plug, two pins direct to meter and two to switch. Not new. 17/6, *post free*.

ANTENNA INDICATOR

Remote indication to within 1° on precision instrument type flush fitting black crackle indicator with 3in. dial calibrated in 2° steps plus the four cardinals. Simple D.C. wiring (6-30 volt) from specially wound potentiometer in sealed die-cast housing with ¼in. drilled spindle transmits accurate signal of horizontal or vertical bearing.

Brand New, Post Free. **35/-**

MEGISTORS, 125, 1,000 or 10,000 MEGohms

Glass encapsulated 10% tolerance high value resistors for minute grid current applications. Ideal for extending the range of sensitive meters or using in probes to provide a really high impedance input for VTVM's or 'Scopes. One of each value plus any chosen two, the 5 for 10/- post free by return.

VARIABLE SPEED HYDRAULIC GEARBOX

This specially made oil-filled casing houses an hydraulic torque conversion unit originally precision made by Westinghouse from high quality materials for the U.S. Government at an acquisition cost exceeding £150 each. Highly suitable for lathe head drive, workshop variable speed power take-off, etc.

Basically the unit is a back-to-back mounted, oil submerged, variable displacement hydraulic pump (input shaft) feeding a reversible hydraulic motor (output shaft) so that variation of the pump displacement by manual control gives very fine selection of output speed from zero up to 6% below input speed while a changeover valve in the supply lines to the motor provides instantaneous reverse at any speed. Recommended input speed 500–1,000 r.p.m., maximum power 1½ h.p. Both shafts ¾in. dia. with Woodruff key.

Tested and fully guaranteed, supplied complete with technical data and performance curves for the remarkable price of £16 only, carriage paid.

1934 & 1935 TRANSMITTER/RECEIVER

TRANSMITTER	£1 10 0	Carriage Paid.
I.F. STRIP ...	£2 5 0	WITH CIRCUIT DIAGRAM
MODULATOR ...	£1 5 0	AND CONVERSION
RECEIVER ...	£1 10 0	DETAILS.

Special offer

Complete Units with control boxes.

FOR EXPORT ONLY. PLEASE ENQUIRE.

PROOPS BROTHERS LTD., 52 Tottenham Court Road, London, W.1.
Head Office and mail order enquiries, Dept. M, LANgham 0141
Shop hours 9 a.m. to 6 p.m. Thurs. 9 a.m. to 1 p.m. OPEN ALL DAY SATURDAY

CLYNE RADIO LTD.

18 TOTTENHAM COURT RD., LONDON, W.1

MUSeum 5929/0095
ALSO AT: 162 HOLLOWAY ROAD, LONDON, N.7
NORth 6295/6/7
99 CHEAPSIDE, E.C.2. MON 6860
All post orders and correspondence to 162 HOLLOWAY RD., LONDON, N.7

Open: Tottenham Court Rd., and Cheapside: 9 a.m. to 6 p.m. Mon. to Fri., Sat. 1 p.m. Holloway Road; 9 a.m. to 6 p.m. daily. Thurs. 1 p.m., Sat. 5.30 p.m.

If not stated, please add postage on orders under £1. Cash with order or C.O.D. (charges extra).

Our advantageous H.P. and Credit Sale Terms are available on any single item over £5. Your enquiries invited. Please print your name and address ! !

The CRY BABY ALARM (19)

This highly efficient unit is simple to assemble, extremely sensitive and may be installed in a matter of minutes. Completely SAFE employing a double wound mains transformer. Attractively finished in Red and Grey (washable) "Lionide" with cream plastic escutcheon. Size only 7¼in x 3¼in. x 6¼in. Supplied in kit form complete with mike at ONLY 72/6 plus 2/6 P. & P. or assembled and tested 89/6 P. & P. 2/6. Suitable miko flex available at 3d. a yard. Instruction book and price list separately 1/- post free. A.C. 200-250 v.

SALE! SALE!

FROM **JANUARY 2nd.**

for callers only at **ALL BRANCHES**

We have a number of **BARGAINS** in New and Demonstration Models of AMPLIFIERS, SPEAKERS, TUNERS, CHASSIS, TAPE RECORDERS, etc., etc.

All with full guarantee. Usual facilities.

Come Early!!

RADIO JACK

Covers local medium wave stations variably tuned. Compact self contained unit requiring only connection to aerial (no power supplies reqd.) for 1st class reception when used in conjunction with your tape recorder or high gain amplifier. All necessary parts available at a special inclusive price of only 19/6. P. & P. 1/6.

---

(42)



SUPER 1-VALVE SHORT-WAVE RADIO

World-wide coverage at most reasonable cost. Covers 40–100 metres with the coil supplied. Can be extended to cover 10–100 metres. Provision is also made for the addition of two extra valve stages. Employs the famous Acorn-type 954 valve. All necessary components can be supplied complete with full assembly instructions at **ONLY 35/-** plus 2/- p. & p. Send 2/- for point-to-point wiring diagram and price list.

THE R.C. 3/4 WATT AMPLIFIER

(14)



Compare the advantages. Treble bass AND middle controls. For crystal or magnetic pick-up. A.C. Mains 200/250 v. Valve line-up: 6V6GT, 6SG7 metal, 6X5GT. Negative feedback. Built on stove enamelled steel chassis, measuring only 8in. x 4in. x 1¾in. Four engraved cream knobs are included in the price of the complete kit with all necessary practical and theoretical diagrams at £4/5/- only, plus 2/6 p. & p. or Instruction Book fully illustrated for 1/- post free. This amplifier can be supplied assembled, tested and ready for use at £5/5/-, plus p. & p.

NEW LOOK ECONOMY FOUR

(3 & 4)

Our very popular three-valve plus rectifier mains T.R.F. receiver is now available with a new De Luxe cabinet with polished Walnut finish and Cream trimming (as illustrated). Brief Spec.: Valve line-up 6K7, 6J7, 6V6 and contact cooled rectifier. Ready drilled chassis, good quality 5in. loudspeaker, Special Denco Coils Covers Medium and Long Wavebands. Overall dimensions: 12in. x 6in. x 5in. high A.C. 200/250 v. Simple construction with guaranteed results. Easy to follow practical and theoretical diagrams supplied. All necessary components, down to the last nut and bolt, are offered at a **SPECIAL INCLUSIVE PRICE OF £5/10/-**, plus 5/- p. & p. Instruction book available separately 1/6, post free. Also available with plastic cabinet in IVORY or BROWN if preferred at **ONLY £5/5/-**, plus p. & p.

THE NEW LOOK RAMBLER PORTABLE

(1)

This wonderful little Medium and Long wave battery superhet incorporates IR5, IT4, 1S5, 3V4 miniature valves, 5in. speaker and frame aerial. Housed in smart two-tone Red/Grey cabinet. All required components at the NEW LOW PRICE of **£6/19/6**, plus 2/6 p. & p.: or with the latest low consumption "96 range" valves at the NEW LOW PRICE of **£7/7/-**, plus p. & p. Uses all-dry batteries AD35 (1/6), B126 (9/-). Full descriptive instruction book, itemised price list, diagrams, etc., available separately at 1/6 post free.

(2) MAINS UNIT FOR ABOVE Fits into battery compartment. A.C. 200/250 v. All required components at ONLY 47/6 plus 1/6 p. & p. or assembled and tested at £3/5/- plus p. & p. (Also suitable for many other portables.)

CLYNE CATHODE RAY OSCILLOSCOPE for Home Construction (37)



A recent addition to our comprehensive stocks of quality equipment for the constructor. This is an exceptionally sound and robust instrument of the most versatile type, that will be a boon to the seriously minded amateur, serviceman or constructor. Specifications: 8-Range Time Base, switched from 20 c/s to 160 Kc/s. Y-Plate Amplifier has a sensitivity of 50 mV. and frequency response of 20 c/s to 600 Kc/s with a gain of 150. A calibrating voltage of 6.3 v. 50 c/s. is provided. Employs ECR30 2¼in. Cathode Ray Tube and 4 valves: 2/ECF80, 1/EF91, 1/6X5. Controls: X-shift, Y-shift, Focus, Width, Brilliance. ON/OFF. Time Base Frequency (Fine), Time Base Frequency (Coarse). Sync. Selector. Sync. Amplitude. Y-input Selector. X-input Selector. Amplifier Gain. Operates from 200/250 v. A.C. Mains. All required components for the construction of this wonderful instrument, including comprehensive assembly instructions, available at a SPECIAL INCLUSIVE PRICE OF ONLY £12/19/6, plus 5/- c. and p. Attractive engraved ivorine Front panel, optional extra at only 10/6. Just arrived ! Portable carrying case at 45/- extra.

CLYNE RADIO

ELECTRONIC ORGAN

Fibre Glass Console *now available*

Readers will no doubt be pleased to know that our working model of this amazing organ for home construction, may be heard and seen at our Hi-Fi Showroom in Tottenham Court Road, W.1. For the benefit of constructors all components, keyboards, chokes, etc., are available ready made. Full constructional details are available in book form at 15/- plus 1/6 p. and p. We shall be happy to forward a complete price list on receipt of a stamp. Please address all organ enquiries for the attention of Mr. L. Roche.

VISIT OUR FULLY EQUIPPED
HI-FI SHOWROOM
AT TOTTENHAM COURT ROAD FOR DEMONSTRATIONS OF THE LATEST
HI-FIDELITY EQUIPMENT
BY ALL LEADING MANUFACTURERS

We stock equipment of Quality by all leading makers: i.e., Leak, Quad, Armstrong, Dulci, Ferrograph, Reflectograph, Vortexion, Tannoy, Linear, Wharfedale, Grundig, Goodmans, W.B., Rogers, Garrard, Lenco, B.T.H., Pamphonic, Simon, Brenell, Collaro, Telefunken, Fi-Cord, etc., etc. A full range of high quality cabinets to suit all purposes is on show, i.e., "RECORD HOUSING," "W.B." "A.D.," etc. Enquire about our interesting part-exchange scheme for personal callers. H.P. Available.

"FAMILY FOUR" (5)

Our supersensitive T.R.F. Receiver for home construction. Covers Long and Medium Wavebands, is housed in very smart plastic table cabinet in Brown or Black. For A.C. mains 200/250 v. Comprehensive assembly instructions provided, including practical and theoretical diagrams, which are easy to follow and will enable you to complete this receiver which will be the envy of your friends. ALL NECESSARY COMPONENTS ARE BEING OFFERED FOR LIMITED PERIOD ONLY AT THE REMARKABLE PRICE OF ONLY 79/6, plus 2/6 P. & P. Instruction book available separately if you wish to study before purchase at 1/6 post free.

THE CLYNE RADIO "DE LUXE" PRINTED CIRCUIT SUPERHET



A new two-wave band (L and M) Superhet using the latest miniature valves: ECH81, EF85 and ECL80, plus contact cooled Rectifier. Incorporates Ferrite Rod Aerial and is of unit construction. Exceptional sensitivity and selectivity. Outstanding performance and quality T.C.C. condensers throughout. Easily constructed in one evening. Brown or Ivory Bakelite or wooden Walnut finish cabinet. A.C. mains 200/250 v. All necessary components at special inclusive price of £7/19/6 plus 3/6 P. & P. Instruction Book with itemised price list available separately at 1/6 post free. Also available in De Luxe Cabinet (as "Economy Four" at 5/- extra).

SUPER PERSONAL PORTABLE. (32) & (33)

A wonderful little set that you can take anywhere. Ideal for camping, picnics, etc. Detachable aerial rod supplied. Covers Medium waveband 200-500 metres. Can be built in approx. 1 hour. All necessary components available at the following SPECIAL INCLUSIVE PRICES: 1-valve version **ONLY** 35/- plus 2/- P. & P. Super 2-valve version **ONLY** 41/-. Plus 2/- P. & P. Send for point-to-point wiring diagram and parts price list 2/- post free. Extra for use with the above DLR5 balanced armature headphones, 7/6 pair.

NEW! "PAGEBOY" 2-TRANSISTOR POCKET PORTABLE

Completely portable—NO EXTERNAL AERIAL OR EARTH REQUIRED. This is an amazing little receiver with built-in aerial and small enough to be held in the palm of the hand. Medium wave reception at wonderful volume. No fiddley tuning! —condenser tuned! Supplied with drilled chassis and colour coded components. Easily assembled with the aid of the easy-to-follow assembly instructions provided. Total cost of all necessary components, including transistors, wiring wire and even solder **ONLY** 32/6 plus 1/6 P. & P. Battery 3/- extra. Ardente type deaf-aid earpiece complete with cord and plugs extra at 12/6. Parts price list and Easy Lay-out Plans 2/- post free. Callers welcome to hear this set demonstrated at any of our branches. Our reputation is your guarantee.

(45)

THE "WAVEMASTER" 7-TRANSISTOR LUXURY PORTABLE

400 MILLIWATTS OUTPUT



(43)

To build yourself Medium and Long waves—Push-Pull Superhet A.V.C. Perfect Car Radio reception. Size 10in. x 6½in. x 4½in. at base tapering to 4in. at top.
Very attractive two-tone grey Vynide covered cabinet with black and gold printed escutcheon plate, cream and gold knobs, handle and cabinet fittings. ★ Weight—complete with long-life 7½ volt battery—4½lb. ★ Mazda high-grade transistors throughout. ★ High-Flux 7in. x 4in. Elliptical Speaker. ★ Slow motion tuning. ★ Co-axial socket at rear for direct connection to Car Radio Aerial. ★ Improved reception by use of seven-section plated telescopic aerial disappearing into Cabinet when closed, 34in. above Cabinet when fully extended.
Construction simplified by Bakelite chassis board with the following components already mounted: I.F. Transformers (3). Oscillator Coil, Trimmer Bank, Output Transformer, Interstage Transformer, Aerial Brackets and Earth Bar. SPECIAL INCLUSIVE PRICE for all required components, full assembly instructions—nothing more to buy—is £10/19/6 plus 3/6 P & P. Alignment service available. Full assembly instructions and individually priced parts list, all of which are available separately, 2/6, post free.

TO BUILD YOURSELF

ALL PARTS AVAILABLE SEPARATELY

"PRACTICAL WIRELESS" POCKET SUPERHET
All required Components for the Pocket Superhet as described in November issue of "Practical Wireless" now available at special inclusive price of £9/15/6 complete, including Printed Circuit. All items available separately, send stamp for list.

	All required components at special inclusive price	P. & P.	Instruction Book and itemised price list available separately
(1) New Look "RAMBLER all dry s'het portable. **NEW LOW PRICE**	£6 19 6	2/6	1/6
(2) "RAMBLER" Mains Unit (suits most portables)	£2 7 6	1/6	9d.
(3) "ECONOMY FOUR" T.R.F. Mains Receiver	£5 5 0	2/6	1/6
(4) "ECONOMY FOUR" with New Look Cabinet	£5 10 0	2/6	1/6
(5) "FAMILY FOUR" (our new T.R.F. Receiver)	£3 19 6	2/6	1/6
(6) "SUPERIOR FOUR" (four valve mains receiver)	£5 15 0	2/6	1/6
(7) Standard JASON F.M. Tuner FMT1	£6 15 0	2/6	2/-
(8) Fringe area JASON F.M. Tuner FMF	£7 15 0	2/6	2/-
(9) JASON "MERCURY 2" Switched F.M. Tuner plus ITA/B.B.C. Sound	£10 10 0	2/6	3/6
(10) OSRAM 912 Printed circuit F.M. Tuner. **NEW LOW PRICE**	£3 19 6	2/6	2/6
(11) JASON "ARGONAUT" AM/FM Chassis	£15 5 0	2/6	2/-
(12) JASON "ARGONAUT" AM/FM Tuner	£13 19 6	3/6	2/-
(13) F.M. Power Pack (suitable for most tuners)	£1 17 6	1/6	1/-
(14) R.C. 3/4 watt Amplifier (with Bass, Middle and Treble controls)	£4 5 0	2/6	1/-
(15) 2-amp. Battery Charger	£1 16 6	2/6	3d.
(16) R.C. Transistor/Crystal Receiver ('phones extra)	£1 1 0	1/3	3d.
(17) R.C. Super Transistor/Crystal Rec. (ditto)	£1 7 6	1/3	3d.
(18) R.E.P. 1-valve Battery Receiver	£2 2 0	2/-	9d.
(19) "CRY-BABY" ALARM (Baby Alarm)	£3 12 6	2/6	1/-
(20) MULLARD 510 Amplifier (printed circuit) Ultra Linear Version	£9 9 0	3/6	1/6
(21) MULLARD 510 as above plus input selector and spare power supplies	£11 10 0	3/6	2/6
(22) "DE-LUXE" Printed Circuit Superhet	£7 19 6	3/6	1/6
(23) "DE-LUXE" with New Look Cabinet	£8 4 6	3/6	1/6
(24) JASON J.T.V. 2 Tuner	£13 19 6	3/6	2/6
(25) RADIO JACK	19 6	1/6	6d.
(26) MULLARD TYPE "C" Tape pre-amp.	£12 9 6	3/6	2/6
(27) JASON WII Wobbulator	£14 19 0	3/6	3/6
(28) JASON Valve Voltmeter EM10 (23 ranges)	£18 10 0	3/6	2/6
(29) NEW JASON F.M. TUNER FMT2 with built-in power supplies and cabinet	£8 19 6	3/6	2/6
(30) NEW JASON FRINGE F.M. TUNER FMT3, as above	£10 19 6	3/6	2/6
(31) PULLIN Series 90 TEST METER	£5 19 6	2/6	1/6
(32) R.C. Super Personal Portable 1-valve (phone extra)	£1 15 0	2/6	2/-
(33) R.C. Super Personal Portable 2-valve (phone extra)	£2 1 0	2/6	2/-
(34) R.C. TRANSETTE 2-Transistor Personal Portable	£3 9 6	2/-	2/-
(35) JASON EVEREST 6-Transistor 2-wave Portable	£13 19 9	3/6	3/6
(36) JASON EVEREST 7-Transistor 2-wave Portable	£15 18 9	3/6	3/6
(37) CLYNE Cathode Ray Oscilloscope	£12 19 6	5/-	10/-
(38) Compact Multi-range Test Meter	£2 19 6	1/6	1/6
(39) CAR RADIO, Printed Circuit, 5-valve S'het. **NEW LOW PRICE**	£11 19 6	3/6	2/6
(40) JASON Audio Generator AG10	£14 5 0	3/6	2/6
(41) JASON Oscilloscope OG10	£22 10 0	5/-	3/6
(42) Super SHORT WAVE RADIO, 1 valve	£1 15 0	2/-	2/-
(43) "WAVEMASTER" 7-Transistor Luxury Portable	£10 19 6	3/6	2/6
(44) "GOLD STAR" De-Luxe 1-valve Portable	£1 17 6	2/6	1/6
(45) "PAGEBOY" 2-Transistor Pocket Portable ('phone extra)	£1 12 6	1/6	2/-

Instruction Books which contain full description easy-to-follow practical wiring diagrams theoretical diagrams itemised price lists, etc., are free of charge with all parcels but may be purchased separately as shown above.

PLEASE NOTE:—A selection of the above items are described more fully in this advertisement!!

PRINTED CIRCUIT CAR RADIO

(39)

(for Home Construction). We are proud to be able to offer this New type Car Radio employing up-to-the-minute circuitry, special 12 volt valves and transistorised out-put stage. The highest degree of sensitivity is assured by the incorporation of Permeability Tuning and a tuned R.F. Stage. Covers Medium and Long Wavebands. NO VIBRATOR PACK IS REQUIRED. This is a really compact receiver that will fit any car. Comprehensive assembly instructions are provided with all necessary components, including valves and transistor at a Special New Low inclusive Price of Only £11/19/6 plus 3/6 P. & P. Instruction booklet with itemised price list, full description dimensions, etc., available separately at 3/6 post free.

● TURN OVER FOR MORE CLYNE BARGAINS ➔

CLYNE RADIO LTD. THE COMPONENT SPECIALISTS

18 Tottenham Court Road, London, W.1.
162 Holloway Road, London, N.7.
99 Cheapside, London, E.C.2.

★ MORE CLYNE RADIO BARGAINS ★

CABY UNIVERSAL TEST METERS
These pocket-size multi-range test meters are of excellent quality and cover all the most useful ranges (A.C. Volts, D.C. Volts, resistance and current). Supplied complete with test prods, instruction book and batteries. Model A.10 (2,000 ohms per volt) £4/17/6
Model B.20 (10,000 ohms per volt) £6/10/-. Plus P.&P. 3/6 on ea. Fully detailed and illustrated leaflet available on request

RECORD PLAYERS
Full range at usual competitive prices. Interesting H.P. facilities
E.M.I. 4-SPEED STEREO/MONAURAL SINGLE RECORD UNIT. Complete with Stereo Head and Sapphire Styli. Brand New and Fully Guaranteed. **ONLY £6/19/6** plus 3/6 P. & P.
LATEST GARRARD MODEL 210. Four-speed manual or automatic. 10in. and 12in. records of same speed can be mixed in any order, wired for stereo, attractive white colour scheme. Price 10½ gns. plus 3/6 P. & P.
LATEST B.S.R. UA14. 4-speed. Attractive appearance. Wired for stereo. Fully guaranteed. **£7/19/6.** plus 3/6 P. & P.
B.S.R. UA8 STEREO/MONAURAL. Few only at **£7/19/6,** plus 3/6 P. & P. Brand new Guaranteed.
COLLARO CONQUEST. 4-speed. Wired for stereo. Brand new. **£7/19/6,** plus 3/6 P. & P
CATHODE RAY TUBES. Unrepeatable offer! 17in. MW 43/69 by leading British Manufacturer. Brand new in original cartons. Not regunned. Full 12-month guarantee. Limited quantity at **£7/10/- each only,** plus 10/- P. & P. Send stamp for comprehensive Valve and Tube List.
METERS. Large selection of panel mounting meters at competitive price. Send stamp for new list now ready.
ANOTHER PORTABLE CABINET! Ex leading manufacturer's battery portable attache type case. Attractive two-tone grey rexine finish. Size closed 13½ in. × 9½ in. × 3½ in. Complete with fittings and handle. Including Medium and Long Wave frame aerial which fits in lid. Limited quantity only at bargain price of **19/6** plus 2/- P. & P. Brand new.
"PIFCO" INSTRUMENT BIT SOLDERING IRON with integral Stand and built-in Spot-light for illuminating work 200/250 v. **ONLY 22/6.** P. & P. 1/6.
SOLDER. New boxed 1 lb reels, 16 S.W.G. 50/50 at **8/6** only, plus 1/- P. & P.
VIBRATOR PACKS. Limited quantity of both 6 volt and 12 volt types available. Output 300 volt. 100 m/a. Fully smoothed. Brand new ex-Govt. surplus. Price 35/- ea., plus 2/6 P. & P. Please specify input voltage required.
12 VOLT VIBRATOR PACK. (Mallory). Output 150 v. @ 40 mA. Complete with synchronous vibrator. Brand new. **ONLY 12/6,** plus 2/- P. & P.
12in. BAKERS SELHURST LOUDSPEAKER. 15 ohms, 15 watt 30-14,000 cps. Brand new, **£4/10/-.** P. & P. 3/6.
12in. RICHARD ALLAN P.M. LOUDSPEAKER. 3 ohm speech coil. Brand new. Only **32/6** plus 2/6 P. & P.
DEAF AID TYPE EARPIECES. Ardente Standard magnetic type complete with lead and plug. Only **12/6.** P. & P. 1/-.
MINIATURE CRYSTAL DEAF-AID TYPE EARPIECE. Supplied with ear insert, 3ft. lead, sub-miniature jack plug and socket at **8/- only,** plus 1/- P. & P.

SUPER MAGNETIC RECORDING TAPE SPECIAL!!!
Famous American Ferrodynamics **"BRAND FIVE"** An enthusiast's "must." Brand new (NOT SUB-STANDARD) High grade Acetate Base, 5in. 600ft. 16/-, 5in. 900ft. 18/6, 5½in. 1,200ft. 23/6, 7in. 1,200ft. 25/-, 7in. 1,800ft. 35/-. Extra quality Mylar Dupont. 3in. 300ft. 13/-. 5in. 1,200ft. 37/6. 7in. 1,800ft. 44/-. 7in. 2,400ft. 60/-. Each on plastic spool. All Post free. *Trade enquiries invited.*

EXTRA SPECIAL OFFER !!
A small three-valve **PORTABLE RECORD PLAYER AMPLIFIER** mounted on baffle 12 x 7in., with High Flux 6½in. Loudspeaker. Valve line-up ECC83, EL84, EZ80. Incorporates separate bass and treble controls. Max. output 3 watts. Will match all types of high impedance pick-up. Ready to use, £5/12/6. P. & P. 3/6.
NEW STYLE CABINET finished in two-tone Leatherette. Will accommodate above Amplifier and Baffle without modification, also most types of Ancillary Equipment. Overall size 18 x 13½ x 8½in. Fitted with carrying handle. £3/9/6 plus 5/- P. & P.
NOTE. If both items purchased together they will be supplied at a special inclusive price £8/7/6 plus 6/6 P. & P.

★ **TAPE RECORDER CONSTRUCTORS** ★
★ *FOR THE CONNOISSEUR* ★
COLLARO TAPE PRE-AMPLIFIER AND BIAS OSCILLATOR. Complete with power pack for use with Collaro Mk. IV deck. 4 valve plus EM81 magic eye. 110-240 v. A.C. Input sensitivity: microphone socket 5 m/v., auxillary socket 500 m/v. Speed equalisation switch gives compensation at all 3 speeds. Full wiring instructions included. List price £21. Limited quantity only at £15/19/6. P. & P. 5/-.
LATEST COLLARO STUDIO TAPE TRANSCRIPTOR. 3 motors, 3 speeds, 1½, 3¾, 7½ i.p.s. takes 7in. spools. Push-button controls, **£12/19/6** plus 5/- P. & P. Usual H.P. facilities.
LATEST B.S.R. "MONARDECK." Single speed Tape Deck. Takes 5½in. spools—3¾ i.p.s. At only **£8/19/6** plus 5/- P. & P.
NEW! NEW! NEW!
TAPE RECORDER AMPLIFIER Suitable for use with either of the above Tape Decks, and most other types. For A.C. mains, 4 watts output. 40-12,000 CPS at 7½ i.p.s. ± 3 db. Facilities for superimpose. Valves: 6BW6, ECL82, 12AX7, EM84, and contact cooled metal rectifier. Radiogram input, microphone input, monitor facilities (can be used as straight through amplifier), volume control and separate treble and bass controls. Chassis measurement 11½ x 3 x 4¾in. Supplied complete with attractive grey/blue escutcheon plate finished in black and gold. Circuit diagram and connecting instructions included. Price £11/5/- only, plus 3/6 P. & P. If purchased with either of the above decks, both items post free!
ATTRACTIVE TWO-TONE PORTABLE CARRYING CASE Suitable for above amplifier and Collaro, Studio deck. Limited quantity only at 72/6 plus 3/6 P. & P.
MIC 45-1 Acos latest flat pistol-grip crystal microphone. Attractive black and gold finish. OUR PRICE 29/6 plus 1/- P. & P.
ACOS MIC 39-1. Crystal stick microphone. List price 5 gns. Our price 39/6 plus 1/6 P. & P.
MIC 40. General purpose crystal microphone with desk stand. Our price 25/- only plus 1/6 P. & P.
M.C.24. Imported, crystal, attractive streamlined polished metal case, incorporates muting switch. List price 64/-. OUR PRICE 42/- only. 1/- P. & P.
ANOTHER HAND MIKE BARGAIN! Lightweight crystal with built-in desk stand at only 19/6. P. & P. 1/-.



LIMITED IMPORT QUOTA ONLY! OUTSTANDING BUY!
MODEL U.1 MULTI-RANGE TEST-METER. Ideal for amateurs and service engineers. Incorporates 3 inch rectangular meter. Ranges: A.C. and D.C. voltage. 0-10-50-250-500-1,000 v. D.C. current 0-100-500 m/a. 0-1 m/a. (used at 0-10 v. range). Resistance 1-2,000 ohms (centre 24 ohms). 100-200,000 ohms (centre 2.4 k.). Sensitivity 1,000 ohms per volt A.C. and D.C. Size: 5in. x 3in. x 2¼in. Weight 22 ozs. only. Fully guaranteed. Supplied complete, and ready to use with test leads, at the very low price of only **79/6** P. & P. 3/6.
(Bona fide trade enquiries invited).

BERNARDS Latest Manual No. 167. "Eleven Tested Transistor Circuits, using Pre-Fabricated Circuit Units." Price 2/6, post free. Covers the use of the new items listed below.
TSL LP45F MINIATURE LOUDSPEAKER, diameter 1¾in., depth ⅝in. High flux 9,500 guass, 150-15,000 cycles, 25/-, plus 1/6 P. & P.
TOROTOR TRANSISTORISED FM FRONT END (80-100 m/cs.). Completed with 2-OC171 VHF Transistors. Ready assembled, 79/6. Plus 26/9 P.T.
Suitable set of 10.7 mc/s. sub-miniature IF TRANSISTOR Transformers (2 IF-1 RDT) 27/6 per set, plus 1/6 P. & P.
SUB-MINIATURE DRIVER and Output Transistor Transformer 12/6 per pair, plus 9d. P. & P.
MINIATURE TRANSISTOR Twin Gangs 196/87 pF. size approx. 1in. x 1in. x ⅜in. 17/6, plus 9d. P. & P. Set of Miniature Transistor IF and OSC Coils (455 kc/s.). (3 IF and 1 OSC), 21/-, plus 1/- P. & P.
3 WAVEBAND CONVERTER TA-12401. With OC170 transistor in emitter injected autodyne converter circuit. S.W., 5.9-13 Mc/s.; M.W., 510-1,620 kc/s.; L.W., 150-275 kc/s. Wavechange and on-off by four pushbuttons. Overall size 3.4 x 2.1 x 1.8in. 67/6. Plus 22/9 P.T.

TRANSISTORS!!!
SURPLUS P.N.P.
RED SPOT (Audio/Experimental Application) ..... 3/6 ea.
WHITE SPOT R.F. up to 2.5 M/cs. ..... 5/- ea.
OC169 VHF PNP JUNCTION TRANSISTOR. Drift-type, Alpha cut-off frequency 80 Mc/s. 18/- ea. Attractive discounts for bulk purchases. The above is a selection only. Full range in stock by all leading manufacturers. Let us have your enquiries. (ALL POST FREE).
FRUSTRATED EXPORT. Not repeatable! L., M. and S.W. SUPERHET RECEIVER. Manufactured by McCarthy for export. At present for operation on 6 volts, but conversion details supplied free.

Valve line-up: 6K8G, 6K7G, 6Q7C 6F6G, 6X5G and 6 volt 4-pin non-synchronous vibrator. 8in. P.M. Speaker, 4 watts output, P.U. socket Ext. L.S. socket, etc. Tone control. Fitted in polished wood cabinet, size 21¼in. x 10¼in. x 10¼in. These cabinets are slightly soiled owing to storage, but each is guaranteed unused, in serviceable condition, tested prior to despatch. Price £5/19/6 only plus P. & P. 7/6, plus 27/6 for A.C. Mains Conversion Components if required. **OUTSTANDING BUY!**
ACOS GP73-2A: Turnover cartridge for Stereo and Monaural Standard and L.P. Few only at 29/6, also GP67-3 Mono at 18/-. Both plus 9d. P. & P.
LOUDSPEAKERS. EX. CHASSIS. As new guaranteed perfect, by leading manufacturers. 5in. high flux. 9/6; 6½in. 10/6; 8in. 13/6; also 10in. with O/P transformer (5,000 ohms), 17/6.
All 3 ohm speech coil, also 8in. available, in attractive cloth covered cabinet, ideal for extension speaker, 22/6. Each item plus 1/6 P. & P. Complete list of new speakers on request.

CLYNE RADIO LTD.
THE COMPONENT SPECIALISTS
•
ALSO SEE PREVIOUS PAGES
18 Tottenham Court Road, London, W.1.
162 Holloway Road, London, N.7.
99 Cheapside, London, E.C.2.

C.R.T. BOOSTER TRANSFORMERS

For Cathode Ray Tubes having Heater/Cathode short circuit and for C.R. Tubes with failing emission. Full installation instructions supplied.

Type A. Low Leakage windings. Optional Boost 25% and 50%. Tapped mains primaries:

2 volt	12/6 each
4 volt	12/6 each
6.3 volt	12/6 each
10.8 volt	12/6 each
13.3 volt	12/6 each

OUR LATEST SUPERIOR PRODUCT. Type A9. High Quality. Low capacity. 10/15 pf. Optional boost 25%, 50%, 75%. 16/6 each

Type B. Mains input. Low capacity. Multi-Output 2, 4, 6.3, 10 and 13 volts. Optional boost 25% and 50%. Suitable for all Cathode Ray Tubes 21/-.

RESISTORS. All preferred values. 20% 10 ohms to 10 meg., ½ w., 4d.; ½ w., 4d.; 1 w. 6d.; 1½ w., 9d.; 2 w. 1/-.

HIGH STABILITY. ½ w., 1% 2/-. Preferred values 10 ohms to 10 meg. Ditto 5% 9d. 100Ω to 5 meg.

5 watt	WIRE-WOUND RESISTORS	1/3
10 watt	25 ohms—10,000 ohms.	1/6
15 watt		2/-

12,500 ohms.—50,000 ohms. 10 w. 3/3

WIRE WOUND POTS, 3 w. Pre-set Min. T.V. type Knurled Slotted knob. All values 25 ohms to 25K. 3/- ea., 30 K. 50 K., 4/-. Ditto ½ w. Carbon Track, 30 K. to 2 Meg., 3/-.

WIRE-WOUND POTS, 4 w. Standard size Pots. long Spindle High Grade. All values 50 ohms to 50 K. 6/6; 100 K. 7/6.

W/W EXT. SPEAKER CONTROL 10Ω. 3/-.

O/P TRANSFORMERS. Heavy duty 80 mA. 4/6. Multi-ratio push-pull 7/6. Miniature 3V4, etc. 4/6. Hygrade Push-Pull 10 watts, 15/6. Push-pull 20 w. 6 k. or 8 k. 30/-.

L.F. CHOKES. 15/10H 60/65 mA. 5/-. 10H 85 mA., 10/6. 10 H 120 mA., 12/6. 10H 150 mA., 14/-.

MAINS TRANSFORMERS 200/250 v. A.C.

STANDARD 2x0-0-250, 80 mA., 6.3 v. 2.5 a. tapped 4 v. 4 a. Rectifier 6.3 v. 1 a., tapped 5 v. or 4 v. 2 a. Ditto 350-0-350 22/6

MINIATURE 220 v. 20 mA., 6.3 v. 1 a. 10/6

MIDGET, 220 v. 45 mA. 6.3 v. 2 a. 15/6

SMALL, 200-0-200 50 mA., 6.3 v. 3 a. 17/6

STANDARD, 250-0-250, 65 mA. 6.3 v. 3.5 a. 17/6

HEATER TRANS., 6.3 v. 1½ a., 7/6; 3 amp. 10/6

GENERAL PURPOSE LOW VOLTAGE. Outputs 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 24 and 30 v. at 2 A. 22/6

AUTO. TRANS. 150w, 0, 10, 120, 200, 230, 250v 22/6

ALADDIN FORMERS and cores, ½in. 9d.; 1in. 10d. 0.3in. FORMERS 5937 or 8 and Cans TV1 or 2. ½in. sq. × 9½in. or ½in. sq. × 1¼in., 2/- with cores.

SLOW MOTION DRIVES. Epicyclic ratio 6 : 1, 2/3.

SOLON. Midget Soldering Iron, 220/40 v. 25 w., 24/-.

REMPLOY INSTRUMENT IRON. 220/40 v. 25 w., 17/6.

MAINS DROPPERS. 3 × 1½in. Adj. Sliders .3 amp. 1,000 ohms 4/3. .3 amps. 4/3. 1 amp. 5,000 ohms, 5/-.

LINE CORD, .3 amp. 60 ohms per foot .2 amp. 100 ohms per foot, 2-way, 6d. per foot; 3 way 7d. per foot.

CRYSTAL MIKE INSERT by Acos 6/6

Precision engineered. Size only ⅝ × ⅞in.

ACOS CRYSTAL STICK MIKE 39-1. Bargain 35/-.

MIKE TRANSF. 50 : 1, 3/9 ea., 100 : 1 Potted 10/6

LOUDSPEAKERS PM. 3 OHM. 3in. Rola, 17/6.
6in. × 4in. Rola, 18/-. 7in. × 4in. R.A., 21/-.
10in. × 6in. Rola 27/6. 8in. Plessey, 19/6.
9½in. Rola 16/6. 8in. Rola, 21/-. 10in. R.A., 30/-.

HI-FI TWEETERS, 4in. 25/-. 12in. Plessey, 30/-.
12in. Baker 15 wt. 3 ohm. and 15 ohm models, 90/-.
12in. Baker foam suspension 15 w. 15 ohm. £6.
12in. HIGH-FI Master £17/10, 20 c.p.s. to 17 k.c.s.

I.F. TRANSFORMERS 7/6 pair

465 kc/s. slug tuning miniature can 1½ × 1½ × 2in. High Q and good bandwith. By Pye Radio. Data sheet supplied.

Weymouth I.F. Standard size 465 kc/s., 12/6 pair.

CRYSTAL DIODE G.E.C., 2/-. GEX34, 4/-. 40 Circuits 2/-.

H.R. HEADPHONES. 4,000 ohms, brand new, 15/- pair.

SWITCH CLEANER Fluid, squirt spout, 4/3 tin.

TWIN GANG CONDENSERS. .365 pf. Miniature, 1¼in. × 1¼in. × 1¾in., 10/-. .0005 Standard with trimmers, 9/-; less trimmers 8/-. Midget 7/6; Single 50 pf. 2/6; 100 pf., 150 pf., 5/6. Solid dielectric 100, 200, 500 pf., 3/6.

VALVE HOLDERS. Pax. int. Oct. 4d. EF50, EA50, 6d. B12A, CRT. 1/3. Eng. and Amer. 4, 5, 6, 7 pin. 1/-.

MOULDED Maxiaa or Int. Oct. 6d. B7G, B8A, B8G, B9A, 9d. B7G with can, 1/6; B12A, 1/3. B9A with can, 1/9.

CERAMIC, EF50, B7G, B9A, Oct. 1/-. B7G, B9A Cans, 1/-.

SPEAKER FRET. Gold Cloth 17in. × 25in., 5/-; 25in. × 38in., 10/-. Tygan 54in. wide, 10/- ft., 27in. wide 5/- ft. Brown, Green or Red. Samples S.A.E.

WAVECHANGE SWITCHES

2 p. 2-way, or 3 p. 2-way; short spindle	2/6
5 p. 4-way, 2 wafer, or 3 p. 11-w. 3 wafer, long spindle	2/6
2 p. 6-way, or 4 p. 2-way, or 4 p. 3-way, long spindle	3/6
3 p. 4-way or 1 p. 12-way long spindle	3/6

Wave change "MAKITE" 1 wafer, 8/6; 2 wafer, 12/6; 3 wafer 16/-; 4 wafer, 19/6; 5 wafer 23/-; 6 wafer 26/6.

TOGGLE SWITCHES. S.P., 2/-; D.P., 3/6; D.P.D.T., 4/-; MORSE KEYS, good quality 2/6.

SUB-MINIATURE ELECTROLYTICS (15 v.), 1, 2, 4, 5, 8, 25, 50 mfd., 100 mfd., 3/- each.

THE HI-GAIN BAND 3 PRE-AMP

Cascode circuit using Valve ECC84. 17db gain. Kit 29/6 less power; or 49/6 with power pack. Plans only 6d.

Also Band 1 version same prices.
(PCC84 Valve if preferred)

1961 RADIOGRAM CHASSIS



THREE WAVEBANDS FIVE VALVES
S.W. 16 m.—50 m. LATEST MULLARD
M.W. 200 m.—600 m. ECH81, EF86, ECC81,
L.W. 800 m.—2,000 m. EL84, EZ80
12-month Guarantee. A.C. 200-250 v., 4-way switch. Short-Medium-Long-Gram. A.C.C. and Negative Feedback, 4.2 watts. Chassis 13½in. × 5¼in. × 2¼in. Glass Dial Size 10 × 4in. horizontal or vertical. Two Pilot Lamps. Four Knobs. Walnut or Ivory. Aligned and calibrated. Chassis isolated from mains.

BRAND NEW £9.10.0 Carr 4/6

MATCHED SPEAKERS 8in. 17/6; 10in. 25/-; 12in. 30/-

MONARCH RECORD PLAYER



BUILD IT YOURSELF using BSR
MONARCH AUTOCHANGER U.A.8
READY BUILT 3W. AMPLIFIER
HANDSOME PORTABLE CASE
HIGH FLUX 6" LOUDSPEAKER

FULL INSTRUCTIONS supplied

Total Price
Carr. and ins. 5/- **£12.10.0**

RECORD PLAYER BARGAINS

4 Speed Autochangers, BSR, U.A.8	
Stereo or Monaural	£6 15 0
Collaro Model 457	£7 19 6
Garrard Model 210	£10 10 0
4 speed Single Players, EMI Stereo or Monaural	£6 19 6
Garrard TA Mk. II	£8 8 0
Garrard 4 HF Transcription	£17 19 6
Garrard Stereo Heads £2 extra.	

AUTOCHANGER ACCESSORIES

Suitable player cabinets (uncut boards) 49/6
Amplifier player cabinets with cut boards 63/-
2-valve amplifier and 6½in. speaker for above 79/6
Ready mounted on baffle 12in. × 7in., 3in. deep.

MINIATURE 2-STAGE HI-FI AMPLIFIER. A.C. only. 200-250 v. Valves ECL82 and EZ80. 3 watt quality output. Mullard tone circuits, bass boost, treble and volume controls. Separate engraved perspex front panel with de luxe finish. Heavy duty output transformer, 3 ohm, and shrouded mains transformer. Stove enamelled chassis size 6 × 5 × 3in. Bargain price £4/15/-. Circuit supplied.

GYLDON TURRET TELETUNER

I.F. 33/36 mcs, complete with frame-grid valves. 20C2 and 30L15. (LT 10v., 7a.) With coax lead, channels 1 to 5 & 8 to 11. Latest model. Brand new price. 45/-, operating data & circuit supplied. Ideal for "P.T." Olympia.

VOLUME CONTROLS

Midget size:
Long spindle. Guaranteed 1 year. All values.
5 K. ohms up to 2 Meg.
No switch. D.P. 9w. 3/-
Linear or Log Tracks. 4/6

80 Ohm Cable Coaxial

Semi air spaced, 1in. dia. Ideal Band III
Losses cut 50% 6d. yd.

FRINGE QUALITY
AIRSPACED .... 1/- yd.

COAXIAL PLUGS .. 1/- LEAD SOCKETS .. 2/-
PANEL SOCKETS .. 1/- OUTLET BOXES .. 4/6
BALANCED TWIN FEEDER per yd. 6d., 80Ω or 200. TWIN SCREENED BALANCED FEEDER 1/6 yd., 80 ohm.

ALUMINIUM CHASSIS. 18 s.w.g. Plain, undrilled, with 4 sides, riveted corners and lattice fixing holes with 2½in. sides 7 × 4in. 4/6; 9 × 7in., 5/9; 11 × 7in. 6/9; 13 × 9in., 8/6; 14 × 11in., 10/6; 18 × 14in., 12/6 and 18 × 16 × 3in., 16/6.

BLACK CRACKLE PAINT. Air drying, 3/- tin.

P.V.C. CONN. WIRE, coloured, single or stranded 2d. yd.

NEON MAINS TESTER SCREWDRIVERS, 5/-.

CORED SOLDER RADIOGRADE, 4d. yd., ½lb. 2/6.

PAXOLIN 1/16in. × 6in. × 10in., 1/6. ION TRAPS 5/-.

AMERICAN MAGNETIC RECORDING TAPE FERRODYNAMICS 'BRAND FIVE"

2in. 600 feet	16/-	MYLAR DUPONT	
3in. 900 feet	18/6	Super High Fidelity	
5½in. 1,200 feet	23/6	Double Play	
7in. 1,200 feet	25/-	5in. 1,200 feet	27/6
7in. 1,800 feet	35/-	7in. 2,400 feet	80/-

Illustrated leaflet S.A.E.

Spare Reels, plastic, all sizes 3/-

RECTIFIERS, RM1. 5/-; RM2. 6/-; RM3, 8/-; RM4, 16/-; RM5, 20/-; FC31. 27/6; 14A88, 17/6; 14A100, 21/-.

MINIATURE CONTACT COOLED RECTIFIERS. 250 v. 50 mA., 7/6; 60 mA., 8/6; 85 mA., 9/6; 200 mA., 21/-; 300 mA., 27/6; Full Wave 250 v. 150 mA., 15/-.

COILS. Wearite "P" type 3/- each. Osmor Midget "Q" type adj. dust core from 4/- each. All ranges.

TELETRON, L and M. T.R.F. with reaction, 9/6.

FERRITE ROD AERIALS. M.W., 8/9; M. & L. 12/6.

T.R.F. COILS. A/HF, 7/- pair. H.F. CHOKES, 2/6.

JASON F.M. TUNER COIL SET, 29/-. H.F. coil aerial coil. Oscillator coil two I.F. transformers, 10.7 Mc/s. Detector transformer and heater chokes. Circuit and component book, using four 6AM6 2/6. Complete kit FMT1 with Jason Calibrated dial and 4 valves, £6/5/-. With new Jason Cabinet FMT2 £2 extra.

CONDENSERS. New Stock. .001 mfd. 7kV. T.C.C. 5/6. 20 kV., 9/6. .1 mfd. 7kV. 9/6. 100pf. to 750 pf. Micas, 6d. Tubular 500 v. 0.001 to 0.05 mfd., 9d.; 0.1, 1/-; 0.25, 1/6; 0.5 1/9; 0.1/350 v., 9d.; 0.1/1,000 v., 1/9; 0.1 mfd., 2,000 v., 3/6; 0.001 mfd., 2,000 v., 1/9. 500pf., 20 kV., 9/6.

CERAMIC CONDS. 500 v. 0.5 pf. to 0.01 mfd., 9d.

SILVER MICA CONDENSERS. 10% 5 pf. to 500 pf., 1/-; 600 pf. to 3,000 pf., 1/3.

CLOSE TOLERANCE (1% pf.) 1.5 pf. to 47 pf., 1/6. DITTO 1% 50 pf. to 515 pf., 1/9; 1,000 pf. to 2,000 pf., 2/-.

TRIMMERS. Ceramic 30, 50, 70 pf., 9d.; 100 pf., 150 pf. 1/3. 250 pf., 1/6. 500 pf., 750 pf., 1/9. Phillips, 1/- ea.

NEW ELECTROLYTICS. FAMOUS MAKES

TUBULAR		TUBULAR		CAN TYPES	
1/250 v.	2/-	50/350 v.	5/6	16/500 v.	4/-
2/350 v.	2/3	100/25 v.	2/-	32/350 v.	4/-
4/450 v.	2/3	250/25 v.	2/6	100/270 v.	5/6
8/450 v.	2/3	500/12 v.	3/-	2,500/3 v.	4/-
8/500 v.	2/9	8+8/450 v.	3/6	5,000/6 v.	5/-
16/450 v.	3/-	8+16/450 v.	3/9	8+16/500 v.	7/-
16/500 v.	4/-	8+16/500 v.	5/6	32+32/450 v.	6/-
32/450 v.	2/9	16+16/450 v.	4/3	50+50/350 v.	6/-
25/25 v.	1/9	16+16/500v.	6/-	64+120/350v.	11/6
50/50 v.	2/-	32+32/350v.	4/6	100+200/275v.	12/6

FULL WAVE BRIDGE SELENIUM RECTIFIERS. 2.6 or 12 v. 1½ amp., 8/9; 2 a., 11/3; 4 a., 17/6; 6 a., 22/6.

CHARGER TRANSFORMERS. Tapped input 200/250 v. for charging at 2, 6 or 12 v., 1½ a., 15/6; 2 a., 17/6; 6 a., 22/6. Charger circuit free. AMMETERS, 4 a., and 5 a., 13/6.

VALVES

NEW and boxed			90 day guarantee
1R5	7/6	6L6G	10/6
1S5	7/6	6N7M	6/6
1T4	6/-	6Q7G	7/6
3X3	3/6	6SA7M	6/-
3S4	7/6	6SJ7M	6/6
3V4	7/6	6SN7	6/6
5U4	7/6	6V6G	6/6
5Y3	7/6	6X4	7/6
5Z3	9/6	6X5	6/6
6AM6	5/-	12A6	9/6
6BE6	7/6	12AT7	8/-
6BH6	9/6	12AU7	8/-
6BW6	9/6	12AX7	8/-
6C4	6/-	12BA6	8/6
6F26	7/6	12BE6	8/6
6H6GT	3/6	12K7	6/6
6J5	5/6	12Q7	6/6
6J6	5/6	35L6	9/6
6J7G	6/6	35Z4	7/6
6K6GT	6/6	80	9/6
6K7G	5/-	807	5/3
6K9G	7/6	954	1/6

EA50	1/6	EY51	9/6
EABC80	8/6	EY86	10/-
EB91	6/-	HABC80	12/6
EBC33	8/6	HVR2A	6/6
EBC41	9/6	MU14	9/-
EBF89	10/-	P61	3/6
ECC84	9/6	PCC84	9/6
ECF80	9/6	PCF80	9/6
ECH42	10/6	PCL82	11/6
ECL80	9/6	PL36	12/6
ECL82	10/6	PL82	10/6
EF39	5/6	PY80	7/6
EF41	9/6	PY81	9/6
EF50	5/6	PY82	7/6
EF80	5/6	QP21	9/6
EF86	14/6	UBC41	9/6
EF92	5/6	UCH42	9/6
EL32	5/-	UF41	9/6
EL41	9/6	UL41	9/6
EL84	3/6	UY41	8/-
EZ40	7/6	U22	8/-
EZ80	7/6	U52	7/6

RADIO COMPONENT SPECIALISTS

48-HOUR MAIL ORDER
337 WHITEHORSE RD.
WEST CROYDON
THO 1665 Buses 133 or 68

POSTAL SERVICE 1/-, OVER £2 FREE. C.O.D. 1/6. (EXPORT C.W.O. POST EXTRA.) Wed. 1 p.m.

PREMIER RADIO

23 Tottenham Court Rd., London. W.1. Tel: MUSeum 3451/2

THE EASY SIX

6-Transistor Battery Portable

MAY BE BUILT FOR £9.15.0 plus 3/- p.p.

Ever Ready PPZ Battery Extra 3/3

STAR FEATURES: ★ Six 1st grade Mullard Transistors ★ Internal Ferrite Rod Aerial ★ ★ Provision for Car Radio Aerial ★ 3in. Loudspeaker ★ Printed circuit, with component positions indicated ★ Preassembled Dial Assembly ★ 500 milliwatts Push Pull output ★ Full medium and long waveband coverage★Attractive two-tone Blue/Cream Vynide covered Cabinet, dimensions 8¼in. × 6¼in. × 3in. ★ Full point-to-point instructions supplied. ★ Weight 3lb. with battery.

Assemble it yourself and SAVE £ £ £'s

COMPACT GRAM. AMPLIFIER

2-valve printed circuit type for use on A.C. or D.C. 200/250 v. mains incorporating modern miniature valves. Output 2 watts, overall dimensions 6½ × 2 × 3½in.
Price 59/6, plus P. & P. 2/6.
Amplifier Cabinet, £2/19/6, plus 5/- P. & P.
7 × 4in. Elliptical Speaker, £1/1/6, plus 1/6 P. & P.
Latest-type Collaro Conquest 4-spd. Changer, £7/19/6, plus 5/- P. & P.
If all the above items are purchased at the same time they can be supplied at £13/15/-, plus 10/- P. & P.



TAKE ADVANTAGE OF THESE

DRAMATIC PRICE REDUCTIONS

AVANTIC SPAII Stereophonic Amplifier. Technical details: power output (each channel) 10 watts peak, L.S. impedance, 4, 8 and 16 ohms, 6-position input selector, bass, treble, volume on/off controls, stereo reverse switch, phase reverse switch, stereo balance control, P.U. balance control. Dimensions 14½ x 8½ x 4in. Original price 28 Gns. P. & P. 7/6. **OUR PRICE 19 Gns.**

AVANTIC PL62I 20-watt monaural Amplifier, frequency response 10 c/s-30 Kc/s. 1bB. L.S. impedance, 4, 8 or 16 ohms. Dimensions 14in. x 8½in. x 7½in. Original price 29 Gns. P. & P. 7/6. **OUR PRICE 19 Gns.**

AVANTIC STEP2I. Stereophonic Tape Pre-Amplifier Unit. Price £4/4/-.

SPECIAL BARGAIN OFFER
THE PERFECT STEREO SYSTEM

Two DL7/35 power amplifiers — original cost £91 - 10 - 0
One SP2I Stereo control unit — OUR PRICE **47 gns**

Brief specifications:
DL7/35. Power output 54 watts peak; L.S. impedance 4, 8 or 16 ohms. power inputs 105-250 v. Valve line-up GZ34, 2-EL34, ECC83, EF86. Dimensions 14½ x 9 x 8½in. Original price 30 gns.
SP21. 6 inputs for each channel, bass, treble, volume control, on/off stereo/3D/reverse stereo switch, stereo phase switch, low pass filter. Power requirements 6.3 v. at 1.3 A., A.C. 350 v. at 5 mA. D.C. Dimensions 14½ x 9 x 4in. Original price £28/10/-.

All this equipment in Brand New and in manufacturer's original sealed cartons. Full descriptive literature available.

THE Petite PORTABLE

MAY BE BUILT FOR £7.7.0 P. & P. 3/-.

Batteries extra.
H.T. 10/- (Type B126) or equivalent.
L.T. 1/6 (Type AD 35) or equivalent.

- High Q frame aerials.
- High sensitivity on both wavebands.
- Medium and long wave superhet circuit.
- Instruction book 1/6.
- Size only 8 × 8 × 4½in.
- Weight including batteries 5½lb.
- 4 valves of the nuvistor type.



BATTERY ELIMINATOR
Housed in two containers which are to replace AD 35 and B126 Batteries.
MAY BE BUILT FOR 37/6
Plus 2/- P. & P.
Only suitable for use with DK96 Series valves.

THE MODEL FMA/1 FERGUSON FM TUNER
13 gns plus 3/- P. & P.

For use with Radio Receivers or Hi-Fi equipment. Completely self-contained, self-powered and housed in a hammered metal finished steel case, 10 × 7½ × 2½in. Frequency coverage 87.6-100 Mc/s. (continuously). Valve line-up: 2—EF80, ECF80, 2 germanium diodes and metal rectifier, for operation on A.C. mains 200/250 v. 50-60 cycles.

TUNERS FOR THE HOME CONSTRUCTOR BY 'JASON'

JASON FTV2. T.V. SOUND & F.M. complete with Turret Tuner and Case, less Valves, £14/19/-, plus 2/6 P. & P. Valves £1/19/-. Instruction Book available separately 3/6.

JASON FMT2. F.M. Tuner with Twin Limiters, sensitivity 5 microvolts, complete with Case and Power Supply. £9/19/- Less Valves, plus 3/6 P. & P. Valves £2/13/-. Instruction Book available separately 2/6.

JASON MERCURY 2. Switched Tuner for F.M. and T.V Sound, less Valves and Power Supply, £10/14/-, plus 2/6 P. & P. Valves £1/4/6. Instruction Book available separately 3/6.

Power Supply Kit. suitable for above £2/14/-, plus 2/- P. & P.

THE VICEROY QUALITY CRYSTAL MICROPHONE A good-quality crystal Microphone for the discerning enthusiast, finished in polished steel with Muting Switch and detachable lead. Price 42/-, P.P. 1/6.



WHY NOT DO IT YOURSELF!

SUPERHET may be built for £7 . 7 . 0 Plus 3/- P. & P.
T.R.F. may be built for £5 . 10 . 0 Plus 3/- P. & P.

These two receivers use the latest type circuitry and are fitted into attractive cabinets 12 × 6½ × 5½in., in either walnut or ivory Bakelite or wood 1/- extra. Individual instruction books 1/- each, post free.

THE 'CLARION'

Transistorised miniature battery-operated TAPE RECORDER

★ Completely transistorised circuit.
★ Constant governed speed of 3¾ I.P.S.
★ Recordings interchangeable with other recorders.
★ Remarkable reproduction on both speech and music.

Price complete with Microphone and tape— **25 GNS.** plus 5/- P. & P.

THE 'MID-FI'

A NEW DESIGN 4½ WATT AMPLIFIER KIT
MAY BE BUILT FOR 95/-
Plus 3/- P. & P.



A new circuit for the home constructor requiring a good quality medium-powered Amplifier for reproduction of Records or F.M. Broadcasts. Technical Specifications: separate bass and treble controls. Valve line-up EF86, EL84, EZ80. Voltage adjustment for A.C. mains from 200/250 volt. 3 or 15 ohms impedance. Negative feedback. Size 7 × 5 × 2in., overall height 5in. Silver-hammered finished Chassis.

FOR THE BEGINNER

A 3-transistor, medium wave, receiver, ideally suited for the young enthusiast or the beginner. Operating on two pen torch batteries.

Simple to construct, with full instructions supplied. No headphones required.

Complete set of components, including plastic case, **27/6** plus 1/6 P. & P. Batteries extra.

THE MODEL VT41 VALVE FILAMENT TESTER

Will instantly check the filaments of all Radio and T.V. Valves, Fuses and Dial Bulbs. Will also give an accurate circuit continuity test and also has built-in 7 and 9 valve straighteners. Size 5½ × 3½ × 1½in.

PRICE **30/-** with Battery, post paid.

CABY MODEL B20 MULTI-METER

DC/V 0-0.5 v. 0-2.5 v. (2K-ohms/V).
DC/V 10-50-250-500-1000 v. (4K-ohms/V).
AC/V 10-50-250-1000 v. (4K-ohms/V).
DC/mA 0-100 microamps (500mV).
DC/mA 0-2.5-25-250mA (250mV).
OHMS, 2K-20 meg.
COMPLETE WITH TEST LEADS—
PRICE **£6/10/0** plus 2/- P. & P.

CABY MULTI-METER A-10

DC/V 10-50-250-500 1kΩ (2kΩ/V).
AC/V 10-50-250-500-1kΩ (2kΩ/V).
Ranges: DC/mA 0.5-25-250 (250mV).
OHM 0-10 kΩ-1MΩ.

Complete with test leads P. & P. 2/6. **£4/17/6**

PREMIER RADIO

309 Edgware Rd., London. W.2. Tel: PADington 6963

Visit our large and comprehensive HI-FI showrooms

PRICE including Microphone, Tape and Spare Spool **19 Gns.** Plus 15/- P. & P.

First Again!!
"THE PREMIER TR/2"

Once again, Premier is first, with another magnificent offer. Introducing the "TR/2" the latest and cheapest addition to our range of popular Recorders.

Star features:

★Latest B&R Tape Deck, with interlocking device to prevent accidental erasure.
★Single speed 3¾in. per sec.
★Playing time 3¾in. std. tape—1½ hours. L.P. tape—2 hrs. 8 mins.
★Volume on /off and tone control.
★Power output 3 watts.
★Input sockets for Microphone, Radio/Gram.
★Extension speaker socket.

Size: 13½ × 9½ × 6in., weight 17 lb.

The 'Magnaphon'

A truly top quality and versatile Tape Recorder at a price well below the original cost. Incorporating the latest Collaro 3-speed Studio Tape Deck.

★ Volume and Tone Control for recordings.
★ Volume and separate Bass and Treble Controls for replay.
★ Facilities for monitoring.
★ Output 4 watts.
★ Separate Output Sockets for Amplifier and Extension Speaker.
★ Mixing Facilities.
★ Housed in attractive red and beige two-tone Cabinet with detachable lid.
★ Fully guaranteed and supplied complete with the following accessories:—

Price £32.0.0 Plus 21/- P. & P.

Good quality Crystal Microphone with Lead and Jack Plug fitted, 5" Reel of Standard Tape and Spare Reel, spare Lead fitted with Jack Plug and Wander Plugs for recording from Radio.

TAPE DECKS

LATEST B&R MONARDECK. Single speed 3¾ i.p.s. Will take 5¾in. spools. **£8/19/6.** P. & P. 5/-.

COLLARO STUDIO TAPE TRANSCRIPTOR. 3 speeds 1⅞, 3¾, 7½ i.p.s. 3 motors. Push-button controls. Will take 7in. spools. **£12/19/6.** P. & P. 7/6.

COLLARO RK. 4 TAPE TRANSCRIPTOR. Twin track operation, 3 speeds, 3¾, 7½, 15 i.p.s. Will take 7in. spools. **£17/19/6.** P. & P. 7/6.

TAPE RECORDER AMPLIFIER specially designed to match the Collaro Studio Tape Deck. **£10/19/6.** P. & P. 4/-. Size 11½ × 5 × 3in., uses 3 valves, magic eye, contact cooled metal rectifier. Incorporates mike/gram/radio inputs, ext. L.s. jack, superimposing switch, with matching knobs.

RECORDING TAPE

By well-known manufacturers, brand new, boxed and full guaranteed.

1,800ft. on 7in. spool	32/6
1,200ft. on 5¾in. spool	22/6

P. & P. 1/- per spool.

AMERICAN C.B.S. RECORDING TAPE

Brand new, fully guaranteed and with Leader Tape:—

600ft. on 5in. Spool	17/6
1,200ft. on 5¾in. Spool	25/-
1,800ft. on 5¾in. Spool D.P.	47/-
1,200ft. on 7in. Spool	25/-
1,800ft. on 7in. Spool L.P.	35/-

Plus 1/- per Spool P. & P.

SINGLE PLAYERS

Collaro Junior 4-speed Player complete with Pick-up	£3 15 0
Garrard 4HF 4-speed Player, complete with Pick-up and automatic stop	£6 19 6
Garrard TA Mk. 2, 4-speed Player, wired for stereo, with plug-in Head	£8 10 0
Philips AG2000, 4-speed Player, with diecast turntable and Microlift, wired for stereo	£10 10 0

P. & P. 2/6 on above units.

RECORD CHANGERS

B&R UA8, 4-speed	£6 19 6
B&R UA8, 4-speed with stereo cartridge	£7 19 6
B&R UA12, 4-speed, wired for stereo and complete with Stereo cartridge	£8 19 6
Collaro Conquest, 4-speed Changer	£7 19 6
Collaro RC457, latest type 4-speed changer	£8 10 0
Garrard RC111 3-speed Changer	£7 19 6
Garrard RC120 Mk. 3, 4-speed	£8 19 6
Garrard RC121/4D, 4-speed	£9 19 6
Garrard RC121 Mk. 2, 4-speed, wired for stereo and with plug-in Head	£10 19 6

P. & P. 5/- on above units.

TRANSCRIPTION UNITS

Garrard 301	£22 7 3
Garrard 301 (Strobe turntable)	£25 15 4
Garrard 4HF (Stereo)	£19 4 8
Garrard 4HF (GC8)	£18 0 9

P. & P. 7/6 on above units.

STEREO ADAPTOR

Why not convert your Record Player or Radiogram to stereo with this easy to install Stereo Conversion Unit complete and ready to install giving an output of 3 watts.

PRICE **£2 . 19 . 6** Plus 2/- P. & P.

STEREOPHONIC PICK-UP CARTRIDGES AVAILABLE, 35/- post paid.

The 'Vogue'



A quality tape recorder, at a popular price including microphone, tape and spare spool.

Price 29 gns.
Plus 21/- P. & P.

★ Collaro 3-speed Tape Deck.
★ Separate Input for Microphone and Gram Recording.
★ Separate Volume Controls for recording.
★ Volume On/Off and Tone Control for replay.
★ 3 watts output.
★ Housed in smart two-tone Blue/Beige Cabinet with detachable Lid.

TAPE RECORDER RADIO JACK

May be bu.lt for 29/6 plus 1/6 p. and p. Tape Recorder Plug Extra.

Improve the quality of your recordings with the most inexpensive Radio Jack available, suitable for any type of Tape Recorder, only a short external Aerial required for full medium waveband coverage. Phono Plugs—9d., Jack Plugs—3/-.

INSTANT BULK TAPE ERASURE

Erase complete Reels of Tape in a matter of seconds. PRICE 27/6 post paid.



THE PREMIER TRANSISTORISED

BABY ALARM

79/6 Plus 3/- P. & P. Battery extra 2/9 (*Ever-Ready PP1 6 volt or equiv.*)

The answer to the modern Parents' problem for "Baby Sitting," this extremely efficient Unit is completely safe, being battery operated, its portability enables you to place the Master Unit in any part of the house. Extra Microphones may be used in different rooms without impairing the efficiency of the Unit. It is the most economical Unit of its kind and will run on one Battery for approximately two months of continuous day and night use. It is housed in an attractive bakelite Cabinet in either ivory or pastel blue. The price includes one Microphone, extra Microphones can be supplied at 12/6 and Microphone Lead at 5d. per yard.



MODEL 379 AM/FM RADIOGRAM CHASSIS BY FAMOUS MANUFACTURER

PRICE **£12.12.0** plus 7/6 p. & p.

Due to a fortunate bulk purchase we are able to offer these exceptionally good quality Radiogram Chassis at this ridiculously low figure. Gram./on/off. Star features of this Chassis are: piano key wavechange. Internal Ferrite Rod Aerial for AM and Magic Eye Tuning Indicator, wavechand coverage: Long Wave 1098-2027 metres. Medium Wave 188-547 metres. VHF/FM 87-101 Mc/s. Valve line-up: ECC85, ECH81, EF89, EM81, EABC80, EL84, suitable for use on 200/250 v. A.C. mains. Dimensions 15¾ wide. 12in. high, 4¼in. deep.

THE VERDIK QUALITY TEN AMPLIFIER AND PRE-AMPLIFIER

A truly High-Fidelity Ultralinear Amplifier with a push-pull output of 10 watts and incorporating negative feedback. Provision for Tuner, also bass and treble control and 5-position selector switch for Microphone, Radio Tape and L.P. and Standard Recordings. Finished in an attractive grey/green stove enamel.

FOR A LIMITED PERIOD ONLY **£14/19/6**
Original cost 23 gns. P. & P. 7/6.



BRAND NEW VARIABLE VOLTAGE TRANSFORMER. 230 volt A.C. input. Fitted in steel hammer finish case complete with 0–300 volt M.C. A.C. Meter, fuse and neon indicator light. Output constantly variable from 0–270 volt A.C. Type 1. 2.2 amp. Price £8/10/-, carriage 10/-. Type 2. 5 amp. Price £12, carriage 10/-.

BRAND NEW VARIABLE VOLTAGE TRANSFORMER. For 230 volt A.C. input. In cases as above with meter, fuse and indicator light. Output constantly variable from 0–230 volt A.C. Type 15. 15 amp. Price £22/10/-. Carr. 15/-.

W. W. RHEOSTAT. New. 3.5K or 5K. 25 watts. Price 7/6. P. & P. 1/6.

NEW WIRE WOUND RHEOSTAT ON CERAMIC. 58 ohm, 50 watt, complete with instrument knob. Price 8/6. P. & P. 1/6.

EX P.O. MAGNETIC COUNTER. 500 ohms type for 24 volt also 3 ohm type for 6 volt D.C. operation. Price 6/6 each. P. & P. 1/-.

AUTO TRANSFORMERS. Step up, step down. 110–200–220–240 v. Fully shrouded. New. 300 watt type £2/2/- each. P. & P. 2/6. 500 watt type £3/3/- each. P. & P. 3/9. 1,000 watt type £4/4/- each. P. & P. 6/6.

HEAVY DUTY L.T. TRANSFORMER. Very conservatively rated for continuous duty. New. In manufacturer's cases. Input 110–260 volt multi-tapped. 50 cycles, single phase. Output 28–29–30–31 volts at 21 ampere. Price £6/15/-, carriage 10/-.

NEW GALVANOMETERS. Solid brass, 3in. dial, in polished wooden case. 70 degree scale, 35 mA either side. 100 ohm coil. Price 12/6 each. P. & P. 1/6.

EX R.A.F. AIR POSITION INDICATOR, containing 3 ball and plate infinitely variable resolving gears, miniature spur bevel and worm gear drives, also toggle, push button and rotary switches, repeater motor, 4 mechanical counters, miniature lamp holders and lamps etc. As new. Illustration below. Price 22/6. P. & P. 3/6.





ROTARY SWITCH REGULATOR. 25 ohms, very conservatively rated at 4 amp., will handle 8 amp. Overall size 7 x 8 x 6in. Price 15/-. P. & P. 2/6.

TWELVE PLATE F.W. BRIDGE CONNECTED RECTIFIER mounted on 200/250 volt A.C. input transformer. Output 36/40 volt D.C. at 1.2 amps. New, perfect. Price 16/6. P. & P. 3/6.

MINIATURE INSTRUMENT RECTIFIERS. Bridge Type 1 milliamp. Guaranteed perfect 7/6 each.

S.T.C. RECTIFIER. 36 plates by 120 mm. Bridge connected. Maximum A.C. input 60 volt. D.C. output 15 amp. New, perfect. Price 60/-. P. & P. 3/6.

BRAND NEW FREQUENCY METERS manufactured by Nalder & Thompson Ltd. Calibrated 45 cycles to 55 cycles per second. 6in. dial. Panel mounting type. In original manufacturer's boxes. PRICE £10/15/- ea. Postage 3/6.

20-WAY STRIP containing standard Post Office telephone Jack Sockets, overall size 11 x 3½ x ½in. New. Price 15/- each. P. & P. 1/6.

10-WAY STRIP standard Post Office telephone Jack Sockets, spacing allowing Igranic Jack Plugs. New. Price 10/-. P. & P. 1/6.

19-INCH RACK MOUNTING 20-WAY P.O. JACK STRIPS with 40 terminals at rear. Price 25/-. P. & P. 3/6.

19-INCH RACK MOUNTING 20-WAY P.O. LAMP STRIPS. Price 25/-. P. & P. 2/6.

LATEST MOST MODERN TYPE OF EX W.D. MINIATURE HEADPHONES. As illustrated. Brand new, low impedance. Price: 10/6 plus P. & P. 1/6.



8-day clockwork Time Switch. Contacts 2½ amp., 230 volt, 24 hour phase, ¼ hour divisions, allow setting for one make and one break to be made every 24 hours, complete with key. Used but guaranteed perfect. Price 27/6 each. P. & P. 2/-.

PYE LEVER OPERATING MICRO SWITCHES. Single pole change over. Brand new. 4/- each or 42/- dozen, p. paid.

TANNOY P.A. LOUDSPEAKER. For outdoor use, metal exponential horn with 20in. square flare. Overall length 30in. Speech coil 15 ohms. Guaranteed in working order and good condition. Price £7/10/-. Carriage 10/-.

PACKARD BELL BRAND NEW RELAYS. 2 pole c.o. 6 volt 80 ohms. 7/6 each. P. & P. 6d.

DIAL THERMOMETER. Made by Short & Mason. Calibrated 0–160 degrees Fahrenheit. 4½in. dial. 6in. rim for flush mounting with 6in. long rod protruding at the back. Brand new. Manufacturer's packing. Price 22/6. P. & P. 3/-.



SOLAR OIL-FILLED CONDENSER. 240 mfd. for 230 V.A.C. or 600 volt D.C. Overall size 14in. x 9in. x 5½in. plus feet. Weight 46 lb. Brand new. Guaranteed perfect. Manufacturer's packing. Price £7/10/-, carriage 10/-.

100 YARD DRUMS GLASS BRAIDED FLEX, 10/.010. New. 10/6 per coil. P. & P. 2/-

18-WAY P.V.C. COVERED 14/36 WIRE, screened overall, covered with P.V.C., all colour coded, 3/6 per yd.; £15 reel of 100 yds. Carriage paid.

A.R.B. U.S.A. RECEIVERS. 24 volt. Covering 195–9,050 k/c. in 4 bands. As new, suitable for use on boats, etc. Price £6 including carriage.

NEW UNCHARGED UNFILLED 12 VOLT ACCUMULATOR 9 ampere in unspillable plastic cases. Comprises 6 x 2 v. separate cells connected by terminal strips. 6 x 5½ x 4½in. over terminals. Price 19/-, plus P. & P. 2/9.

245 AMP. 2 VOLT ACCUMULATOR Admiralty type in wooden casing. Size 15 x 7½ x 7½in. Weight 60lb. Unfilled, uncharged. New. Price £4. Carriage 10/-.



MINIATURE P.M. MOTOR. 12/24 volt, reversible. 1½in. dia. New. Price 10/6 each. P. & P. 1/-.

AIRCRAFT CINE CAMERA G45B Mk. III. Fully modified, fitted with f/3.5 triple anastigmat lens, takes 25ft. of 16 mm. film, fitted with 24 v. motor. 16 exposures per sec. Brand new, original packing, £4/10/- each. P. & P. paid.

SERVICE TRADING COMPANY →

SLIDER RESISTANCES. 2 amp. 500ohms, size 14in. x 6in., plus handle 6in., 27/6. P. & P. 3/6.



SOLENOID OPERATED MAGNETIC RELAY. Type SCW/3945, 4 pole changeover, 10 A contacts 24 v. operation. Brand new 13/6. P. & P. 1/6.

CARPENTER'S TYPE POLARISED RELAYS. 2 x 9,500 turns at 1,685 ohms. Price 22/6 each. P. & P. 1/-.



HIGH SPEED RELAY. Siemens. Two bobbins 1,000 ohms each. New, 10/6 each. P. & P. 1/-.

SIEMENS H.S. RELAY. Very latest type, sealed. H96E. 1,700 ohms plus 1,700 ohms, single C.O. contacts. Brand new with fixing clip. In maker's cartons. Price 16/6 each, plus 1/- P. & P.

Siemens sealed similar relay to above, but 2.2 ohms plus 2.2 ohms. Minus clips, 12/6 each. Plus 1/- P. & P.

SUPERIOR BRAND NEW RELAY. 7,000 ohms coil. Will pull in at 750 microamp. and out at 450 microamp. Change-over, platinum contacts. Vacuum sealed, will therefore not be affected by oil, moisture or water and never needs adjusting. Weight 2½ oz. Price 18/6. P. & P. 1/-.

MINIATURE MOVING COIL DIFFERENTIAL RELAY. Two coils 350 ohms each. Operating current minimum 140 microamp., nominal 400 microamp, maximum 8 milliamp. One pole two way, or, centre stable. Two way contact current 100 mA at 50 V A.C. or D.C. Size 1½ x ⅝ x ⅝in. Price 22/6 each.

G.E.C. SEALED RELAY. Type M.1090. 180 ohms coil. 6/12 volt. 4 C/O. Brand new. 10/-. P. & P. 1/-.

G.E.C. SEALED RELAY. Type M.1092. 670 ohms coil. 12/24 volt. 4 C/O. Ex new equipment. Unused. 10/-. P. & P. 1/-.

G.P.O. 600 TYPE RELAY. 400 ohms coil. 24 volt. 2 C/O plus 2 M. New 7/6. P. & P. 1/-.

MINIATURE OPEN TYPE RELAY. 700 ohms coils. 24 volt. 2 C/O. Ex new equipment. Unused. 7/6. P. & P. 1/-.

ROTARY RELAY. 12 volt. Heavy duty change-over contacts and one low current for external circuit, plus one break set. Price 7/6. P. & P. 1/6.



MINIATURE UNISELECTOR SWITCH. Two banks of ten plus home contacts one bank continuous of normal. 30 ohm coil for 24 volt operation. Brand new, manufacturer's packing. Price 22/6 each. P. & P. 2/6. As illustrated.

CLA88 D WAVE METER. Latest release of these famous Hetrodyne wave meters with directly calibrated illuminated dial, most suitable for amateur transmitters, covers two ranges 1.9–8.0 Mc/s. and 4.0–8.0 Mc/s. Complete with reference crystals for zero settings, two valves, 2 x 6 volt vibrators, MAKER'S instruction book and matched set of headphones for monitoring. Designed for 6-volt D.C. operation, can easily be modified for mains and suitable transformer supplied for 7/6. In spot-on condition as tested by R.E.M.E. In transit case. Price 5 gns. each, plus 6/6 carriage.

SOUND POWER TELEPHONE HANDSETS. Each couple connected by ordinary 2 core lighting flex will secure instant and reliable intercommunication. No batteries required. Price per set of 2 33/-, plus P.&P. 3/-.

ENGINE SPEED INDICATOR. On the basis of a special ex-R.A.F. meter which we are able to supply and a few small linking parts which can be purchased anywhere, an inexpensive engine speed indicator can be made up which works on simple pulse counting principles in conjunction with the contact breaker on the distributor. Will give direct reading in R.P.M. Full conversion instructions are supplied by us. Additional standard parts required easily obtainable for about 15/-. R.A.F. meter as offered by us 16/6, plus 2/6 P. & P.

ONE ONLY, "CINTEL" DEMONSTRATION OSCILLOSCOPE. 15in. double beam. Condition as new. Guaranteed. Complete with full maker's instruction book. Price £85.

NEW IMPORTED EXTREMELY EFFICIENT MOTOR with tremendous power weight ratio. For 12 volt D.C. but very efficient on 6 volt. Three position switch. Weight 2.1 oz., size 1⅜in. x 1⅛in. dia. Speed 7,000 r.p.m. Self lubricating. 15/-, plus 1/- P. & P.

PRECISION MADE GEARED MOTOR BY DRAYTON REGULATOR CO., for 230 volt 50 cycles A.C.

TYPE R.G.R., reversible. 37 r.p.m. overall size 5in. x 4in. x 5½in. Weight 4½ lb. Ex brand new equipment. Unused. Price £3/17/6. P. & P. 3/-.



MAINS POWER SUPPLY UNITS Potted and sealed transformer and choke by famous maker. Mounted on metal chassis 6½ x 7¼in., complete with 5Z4 rectifier valve and full smoothing.

Input tapped 220–230–240 volts.
Output: 300 V. D.C. at 100 mA.
6.3 V. A.C. at 4.5 amp.
6.3 V. A.C. at 2 amp.
Rectifier supply 5 V. A.C. at 3 amp. Very conservatively rated. Price 47/6 plus P. & P. 6/6.

METERS GUARANTEED PERFECT

Charging Types

2½ amp. D.C. M.I. 2in. fl. rnd.	7/6
5 amp. D.C. M.I. 2½in. fl. rnd.	11/6
7½ amp. D.C. M.I. 3½in. proj. rnd.	12/6
9 amp. D.C. Hot Wire W.R. 2½in. fl. rnd.	6/6
15 amp. D.C. M.C. 2in. rnd.	10/6
30 amp. D.C. M.C. 2in. fl. sq.	12/6
100 amp. A.C. M.I. 4½in. fl. rnd.	32/6

Voltmeters

12 v. D.C. M.C. 2½in. proj. rnd.	8/6
20 v. D.C. M.C. 2in. fl. sq.	10/6
25 v. D.C. M.C. 2in. fl. rnd.	7/6
30 v. M.I. 3in. proj. rnd.	10/6
40 v. M.C. 2in. fl. sq.	10/6
300 v. A.C. M.C. 2½in. fl. rnd.	27/6
300 v. A.C. M.I., 2½in. fl. rnd.	22/-
400 v. A.C. M.I. 4½in. rnd.	35/-
90–180 v. A.C. M.I. 4½in. fl. iron	25/-

Milliammeters

1 mA. M.C. 2½in. fl. rnd.	25/-
200 mA. M.C. 2½in. fl. rnd.	12/6
500 mA. M.C. 2½in. fl. rnd.	12/6
Microamp	
50 microamp., scaled 0–100, M.C. 2½in. fl. rnd.	42/6
50 microA. 2½in. square, side fitting scales	35/-
500 microamp., M.C. 2in. rnd. F.L. scaled 15/600 volt. NEW	16/6

Postage on all meters 1/- each.

Miniature latest type moving coil 0–5 milliamp meter, 1½in. diameter, flush fitting, complete with fixing clip. Price 17/6. P. & P. 1/-.

CRYSTAL CALIBRATOR No. 10. A crystal controlled 4-valve high-grade instrument in the same category as the famous B.C. 221. Directly calibrated, does not require cross reference or charts — functions as follows:— (1) A crystal controlled oscillator which provides fixed frequency signals of 500 KC and all harmonics of 500 KC to beyond 10 Meg. and up to 30 Meg.

(2) A variable oscillator from 250 KC to 500 KC, this enables all intermediate frequencies between 250 Kc/s. and 30 Meg. to be produced and modulated.

Supplied complete with 3 spare valves, all leads and maker's instruction book in carrying haversack. The complete outfit is brand new—repeat NEW. Price £4/19/6. Carr. 3/-.

Postages and carriage shown above are inland only. For overseas please ask for quotation.

SERVICE TRADING Co.

PERSONAL CALLERS ONLY: **9 Little Newport Street, London, W.C.2** *TEL: GER 0576*
ALL MAIL ORDERS. ALSO CALLERS AT:
47-49 High Street, Kingston-on-Thames
Telephone: KINgston 4585

R.S.C. HI-FI TAPE RECORDER KIT

OR DEPOSIT £5/7/6 and 12 monthly payments of 49/-. Cash price if settled in 3 months.

Build a high quality recorder in the £70 class for only

25½ GNS. Carr. 17/6.

Can be assembled in ½ hour.

INCORPORATING THE LATEST COLLARO STUDIO TAPE TRANSCRIPTOR' THE LINEAR L74X HIGH QUALITY TAPE AMPLIFIER. A HIGH FLUX 7 × 4in. LOUDSPEAKER, Reel of Best Quality TAPE, Spare Tape Spool, a Portable Cabinet, size approx. 16 × 13 × 9in., finished in durable and attractive duo-tone Fellerome, and connection diagram for wiring amplifier to transcriptor.

FEATURES INCLUDE

★ 2 SPEEDS ★ FREQUENCY RESPONSE 50-11,000 c.p.s. ★ SWITCHED NEGATIVE FEEDBACK EQUALIZING FOR EACH SPEED. ★ OUTPUT 4 WATTS ★ MAGIC EYE RECORDING LEVEL INDICATOR ★ 3 MOTORS. Fast rewind. ★ TAPE MEASURING AND CALIBRATING DEVICE. ★ TAKES FULL 7in. DIAMETER REELS OF TAPE. ★ NEGLIGIBLE HUM. ★ ENTIRELY EFFECTIVE AUTOMATIC ERASURE.

Full descriptive leaflet supplied on receipt of S.A.E.

HI-FI 10 WATT AMPLIFIERS

BRAND NEW CARTONED MANUFACTURERS DISCONTINUED MODEL. **£6.19.9** Carr. 7/6.

A REMARKABLE OPPORTUNITY

Push-pull output. Latest high efficiency Mullard valves Dual separately controlled inputs, for mike and gram. Separate bass and treble controls. High sensitivity. Output for 3 ohm or 15 ohm loudspeaker. Guaranteed, tested and in perfect working order. Please state speaker matching required when ordering.

SUPERHET RADIO FEEDER UNIT

Design of a high quality Radio Tuner Unit (specially suitable for use with any of our Amplifiers). A Triode Heptode F/changer is used. Pentode I.F. and double Diode Second Detector, delayed A.V.C. is arranged so that A.V.C. distortion is avoided. The W. Ch. 8w. incorporates Gram-position. Controls are Tuning, W. Ch. and Vol. Output will load most Amplifiers requiring 500 mV. input depending on Ac location. Only 250 v. 15 mA. H.T. and L.T. of 6.3 v. 1 amp. required from amplifier. Size of unit approx. 9-6-7in. high. Send S.A.E. for illustrated leaflet. Total building cost is £4/15/-. Point-to-Point wiring diagrams and instructions 2/6.

CONSTRUCTIONAL ENVELOPES
Repanco 3 Dee Transistor Radio 1/3. Repanco Mini 3 Pocket Portable Transistor Radio 1/6. Repanco Mini 7 Transistor Pocket Portable (total building cost 9 gns) 1/6. R.S.C. All 12-watt High Fidelity amplifier 1/6. R.S.C. STEREO/TEN High Quality Stereo Amplifier 1/9.

RE-ENTRANT LOUDSPEAKERS

For factory or outdoor use.

Tannoy 7.5 ohms 8 watts 35/8.

Parmeko horn type, highly efficient. Handles up to 10 watts. 15 ohm 200 ohm and 600 ohm matching 59/6. R.C.A. 20 watt rating, 3 ohm, 15 ohm. 200 ohm. and 600 ohm matching 6 gns.

AGOS HI-FI CRYSTAL 'MIKES'

Mic 30 hand or Desk type **27/9** (Listed 45/-)
39-1 Stick type **39/6** (Listed 5 Gns.)
Limited number.

R.S.C. BATTERY TO MAINS CONVERSION UNITS

Type BM1. An all-dry battery eliminator, Size 5½ × 4½ × 2in. approx. Completely replaces batteries supply 1.4 v. and 90 v. where A.C. mains 200-250 v 50 c/s. is available. Suitable for all battery portable receivers requiring 1.4 v. and 90 v. This includes latest low consumption types. Complete kit with diagram 39/9 or ready for use 46/9.

Type BM2. Size 8 × 5½ × 9½in. Supplies 120 v. 90 v. and 60 v., 40 mA. and 2 v. 0.4 a. to 1 amp., fully smoothed. THEREBY COMPLETELY REPLACING BOTH H.T. BATTERIES AND H.T. 2 v. ACCUMULATORS when connected to A.C. mains supply 200-250 v. 50 c/s. SUITABLE FOR ALL BATTERY RECEIVERS normally using 2 v accumulator

Complete kit with diagrams and instructions. 49/9 or ready for use 59/6.

TAPE RECORDERS AT WHOLESALE PRICES. Leading makes. 26 gn. model 18 gns. 29 gn. model 20 gns. 40 gn model 27 gns. 42 gn. model 29 gns. 63 gn. model 45 gns. 64 gn. model 44 gns. All brand new with manufacturer's guarantee. Make and model No. on request. No H.P.

VALVES! Full range at really competitive prices.

THE SKY FOUR T.R.F. RECEIVER

A design of a 3 valve 200-250 v. A.C. mains L. and M. wave T.R.F. receiver with selenium rectifier. For inclusion in cabinet illustrated or walnut veneered type. It employs valves 6K7, 8F61, 6F6 and is specially designed for simplicity in wiring. Sensitivity and quality are well up to standard. Point-to-Point wiring diagram, instructions and parts list 1/9. This receiver can be built for a maximum of £4/19/6 including cabinet. Available in brown or cream bakelite or veneered walnut.

EXTENSION SPEAKERS. Handsome walnut veneered cabinets. All standard 2-3 ohms. 6½in. 29/9; 8in. 35/9.

R.S.C. A12 STEREO AMPLIFIER KIT

A complete kit of parts to construct a good quality 3 + 3 watt (total 6 watt) stereo amplifier providing really life-like reproduction. Suitable for use with all stereo pick-up heads at present available. Ganged volume and tone controls. Preset balance control. Outputs for matched 2 3 ohm speakers. For 200-250 v. A.C. mains. Astonishing value.

4 GNS. Carr. and packing 7/6.

R.S.C. STEREO/TEN HIGH QUALITY AMPLIFIER KIT

Valves EZ81, ECC83, ECC83, EL84, EL84. Separate Bass and treble controls, giving "cut" and "boost." Sensitivity 50 mV. 5 watts high quality output on each channel. Can be used as straight 10 watt amplifier. Controls: Stereo/Monaural switch, ganged volume, ganged treble, ganged bass, and balance. Outputs for 3 ohm speakers. Point-to-Point wiring diagrams and instructions. Carr. 7/6.

8 Gns.

Illustration full constructional details and priced parts list 1/9.

SELENIUM RECTIFIERS

We can quote special prices for quantities of 12 to 10,000 of most types Special types made to order.

L.T. Types		H.T. Types H.W.	
2/6 v. ½ a. h.w.	1/9	120 v. 40 mA.	3/9
6/12 v. 1 a. h.w.	2/9	250 v. 50 mA.	3/11
Following F.W. (Bridge)		250 v. 60 mA.	4/11
6/12 v. 1 a.	3/11	250 v. 80 mA.	6/11
6/12 v. 2 a.	6/11	250 v. 200 mA.	12/9
6/12 v. 3 a.	9/9		
6/12 v. 4 a.	12/3	**Contact Cooled**	
6/12 v. 5 a.	14/6	250 v. 80 mA.	6/11
6/12 v. 6 a.	15/6	250 v. 75 mA.	10/11
6/12 v. 10 a.	25/9	P.W. (Bridge)	
6/12 v. 15 a.	35/9		

JUNCTION TRANSISTORS. R.F. Type 11/6. Audio type, 5/9. Power type Goltop V15/10P 2 watts. 17/9. OC71 10/-. OC72 16/9. XB102 10/-. XB104 10/-. XA101, XC101. OC44 17/6. XA102. XA103, XA104 12/9 and many other types.

RECORDING HEADS. Baird Record Playback and Erase (housed in one container) 9/6 pair.

SPECIAL OFFER. of R.C.A. replacement styli for Collaro Studio "O" and "P" Ronette and other pick-up heads. Sapphire type standard of L.P. 3/11 each. Diamond type normally 63/5. Only 29/11.

HEAVY DUTY CHARGER KIT

6/12 v. variable charge rate up to 6 amps. Consisting of Mains Trans., F.W. (Bridge) Selenium Rectifier, 0-7 amp. meter, multi-position switch with knob, fuses, fuse-holders, panels, plugs, and circuit. Only 59/6. Post 4/6.

Battery Chargers and Kits for 200-230-250 v. 50 c/s. A/C. Mains

ASSEMBLED CHARGERS

6 v. 1 a.	19/9
6 v. 2 a.	29/9
6/12 v 1 a.	29/9
6/12 v. 2 a.	38/9

Above ready for use with mains and output leads. Cases well ventilated and finished in stoved blue hammer. Carr. & Pkg. 3/6.

CHARGER TRANSFORMERS

200-230-250 v. 50 c/s.

0-9-15 v. 1½ a.	12/9
0-9-15 v. 2½ a.	15/9
0-9-15 v. 3 a. ...	16/9
0-9-15 v. 5 a. ...	19/9
0-9-15 v. 6 a. ...	23/9

BATTERY CHARGER KITS

Consisting of Mains Transformer, F.W. Bridge, Metal Rectifier, well ventilated steel case. Fuses, fuse-holders, grommets, panels and circuit. Carr. 2/9 extra.

6 v. or 12 v. 1 amp.	24/9
As above, with ammeter....	32/9
6 v. 2 amps.	25/9
6 v. or 12 v. 2 amps.	31/6
6 v. or 12 v. 2 amps. ..... (inclusive of ammeter)	42/9
6 v. or 12 v. 4 amps. with variable charge rate selector and ammeter	59/9

CHARGER AMMETERS

0-1.5 amp., 0-3 amp., 0-4 amp., 0-7 amp., 0-25 amp., 0-60 amp. 8/9

ASSEMBLED CHARGER

6 v. or 12 v. 2 amps. Fitted Ammeter and selector plug for 6 v. or 12 v. Louvred metal case, finished attractive hammer blue. Ready for use with mains and output leads. Double Fused. Only **49/9** Carr. 3/9.

As above, but for 3 amp. charging. Only 59/6. Carr.3/9

ASSEMBLED 6 v. or 12 v. 4 amps.

Fitted Ammeter and variable charge selector. Also selector plug for 6 v. or 12 v. charging Double fused. Well ventilated steel case with blue hammer finish. Ready for use with mains and output leads. Carr. 5/-. Or Deposit **13/3** and 5 monthly payments of **13/3**.

As above, but for 6 amp. charging **4 GNS.** Carr. 5/-. Or Deposit **16/-** and 5 monthly payments of **16/-**. The 6 amp. model only is slightly store soiled and is being offered at well below usual price.

LINEAR L45 MINIATURE 4/5 W. QUALITY AMPLIFIER. Suitable for use with any record playing unit and most microphones. Negative feedback 12 D.B. Bass and Treble controls. For A.C. mains input of 200-250 v. 50 c.p.s. Output for 2/3 ohm speaker. Three miniature Mullard valves. Size only 6 × 5 × 5½in. high. Chassis fully isolated from mains. Guaranteed 12 months. Only Deposit 29/- and 5 monthly payments of 29/-. Send S.A.E. for leaflet. **£5.19.6** Or

W.B. "STENTORIAN" HIGH FIDELITY P.M. SPEAKERS

HF1012, 10 watts, 15 ohm (or 3 ohm) speech coil. Where a really good quality speaker at a low price is required, we highly recommend this unit with an amazing performance. 84/10/9. Please state whether 3 ohm or 15 ohm required.

D.C. SUPPLY KITS. Suitable for electric trains. Consist of mains trans. 200-250 v. 50 c.p.s.: 12 v. 1 amp. selenium rect. (F.W. Bridge); 2 fuseholders, 2 fuses, change direction switch, variable speed regulator, partially drilled steel case and circuit. Very limited number. 33/9.

REPANCO TWINETTE TRANSISTOR PORTABLE RADIO DESIGN. Constructional Envelope and parts list 1/3. Built-in Ferrite Aerial, 7in. × 4in. speaker, Long and Medium waves. Size approx. 7 × 4 × 2in. Total cost of all parts 5 gns.

LINEAR TAPE PRE-AMPLIFIER Type TP/1. Switched negative feedback equalisation. Positions for Record 1½in., 3½in., 7½in. and Playback. EM84. Recording level indicator. Designed primarily as the link between Collaro Tape Transcriptor and high fidelity amplifier but suitable almost any Tape Deck. **9 Gns.**

POWER PACK KITS. Only 18/11. Fully smoothed H.T. output of 250 v. 60 ma. and L.T. supply of 6.3 v. 1.5 amp. Consisting of Double Wound Mains Transformer 230/250 v. 50 c.p.s. A.C. primary. Selenium Rectifier, Smoothing Choke, Double Electrolytic Condenser. Aluminium Chassis and Circuit.

P.M. SPEAKERS. 2-3 ohms 2½in. Perdio 21/9. 5in. Goodmans 17/9. 7 × 4in. R.A. Elliptical 19/9. 6½in. Rola 19/9. 8in. Rola 19/9. 8in. Goodmans 25/9. 8 × 5in. Elac. with high flux magnet 25/9. 10in. R.A. 28/9. 10 × 6in. Elliptical Goodmans 29/9. 12in. R.A. 29/11. 12in. R.A. 3 or 15 ohms. 10 watts, 12,000 lines, 59/6.

TWEETERS. 4in. Plessey, 3 ohms, 18/9. R.A. 15 ohms 25/9.

R.S.C. A10 ULTRA LINEAR 30 WATT AMPLIFIER

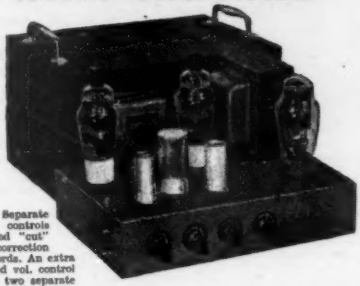

HIGH FIDELITY PUSH-PULL UNIT EMPLOYING SIX VALVES. EF86, EF86, ECC83, 807 807, GZ34. Tone Control Pre-Amp. stages are incorporated. Sensitivity is extremely high. Only 12 millivolt minimum input is required for full output. **THIS ENSURES THE SUITABILITY OF ANY TYPE OR MAKE OF MICROPHONE OR PICK-UP.** Separate Bass and Treble controls give both "lift" and "cut" with ample tone correction for long playing records. An extra input with associated vol. control is provided so that two separate inputs such as "mike" and gram., etc., can be simultaneously applied for mixing purposes. **AN OUTPUT SOCKET WITH PLUG IS INCLUDED FOR SUPPLY OF 300 v. 30 mA. and 6.3 v. 1.5 A. FOR A RADIO FEEDER UNIT.** Price in kit form with easy-to-follow wiring diagrams. ONLY **11 Gns.** Or Factory built with 12 months' guarantee **£13/19/6. TERMS ON ASSEMBLED UNITS. DEPOSIT 31/9** and 9 monthly payments of **31/9.** Carr. 10/-.

Cover as illustrated Type 807 output valves are used with High Quality Sectionally wound output transformer specially designed for Ultra Linear operation. Negative feedback of 20 D.B. in main loop. **CERTIFIED PERFORMANCE FIGURES ARE EQUAL TO MOST EXPERSIVE UNITS AVAILABLE.** Frequency response ± 3 D.B. 30-30,000 c/s. Tone Controls ± 12 D.B. at 50 c/cs. ± 12 D.B. to — 6 D.B. at 12,000 c/cs., hum and noise 70 D.B. down. Good quality reliable components used. Chassis finish blue hammer. Overall size 12 × 9 × 9in. approx. Power consumption 150 watts. For A.C. mains 200-250 v. 50 c/s. Outputs for 3 and 15 ohm speakers. **EQUALLY SUITABLE FOR THE CONNOISSEUR OR FOR LARGE HALLS, CLUBS OR OUTSIDE FUNCTIONS, IDEAL FOR USE WITH MUSICAL INSTRUMENTS SUCH AS STRING BASS, ELECTRONIC ORGANS, GUITARS, etc. FOR DANCE BANDS, GARRISON THEATRES, etc., etc. We can supply Microphones, Speakers, etc., at keen cash prices or on terms with amplifiers. EXPORT ENQUIRIES INVITED.**

FULL RANGE OF LINEAR HIGH FIDELITY AMPLIFIERS ALWAYS IN STOCK.

GLSA MINIATURE 5 WATT GRAM AMPLIFIER

For 200-250 v. 50 c.p.s. A.C. mains. Overall size only 11½ × 2½ × 2½in. Fitted Vol. and Tone Control with mains switch. Designed for use with any kind of single player or record changing unit. Output for 2-3 ohm speaker. Guaranteed 12 months. Only **50/6.**

R.S.C. AS 4-5 WATT HIGH GAIN AMPLIFIER

A highly sensitive 4-valve quality amplifier for the home, small club, etc. Only 50 millivolts input is required for full output so that it is suitable for use with the latest high fidelity pick-up heads in addition to all other types of pick-ups and practically all makes. Separate Bass and Treble controls are provided. These give full long playing record equalisation. Hum-level is negligible being 71 D.B. down. 18 D.B. of negative feedback is used. H.T. of 300 v. 26 mA. and L.T. of 6.3 v. 1.5 a. is available for the supply of a Radio Feeder Unit or Tape Deck pre-amplifier. For A.C. mains input of 200-250 v. 50 c/s. Output for 2-3 ohm speaker. Chassis is not alive. Kit is complete in every detail and includes fully punched chassis (with base-plate) with the blue hammer finish, and point-to-point wiring diagrams and instructions. Exceptional value at only **£4/15/-** or assembled ready for use **£5/-** extra, plus 3/6 carriage. Or Deposit **22/-** and five monthly payments of **22/-** for assembled unit.

R.S.C. TRANSFORMERS. Fully Guaranteed. Interleaved & impregnated

WE CAN QUOTE FOR SPECIAL OR STANDARD TYPES IN ANY QUANTITY. OUR FACTORY HAS SUPPLIED LEADING EQUIPMENT MANUFACTURERS AND GOVT. DEPTS. FOR 15 YEARS.

MAINS TRANSFORMERS. Primaries 200-230-250 v. 50 c/s.

FULLY SHROUDED UPRIGHT MOUNTING.

250-0-250 v. 60 mA., 6.3 v. 3 a., 5 v. 2 a. 2½-3-3ins.	17/11
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	27/11
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	27/11
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	27/11
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	33/11
425-0-425 v. 200 mA., 6.3 v. a., c.t. 5 v. 3 a.	44/9
450-0-450 v. 250 m.A., 6.3 v. 5 a., 5 v., 3 a.	50/9

TOP SHROUDED DROP-THROUGH TYPE

260-0-260 v. 70 mA., 6.3 v. 2 a., 5 v. 2 a.	16/11
250-0-250 v. 100 mA., 6.3 v. 3.5 a.	19/9
250-0-250 v. 100 mA., 6.3 v. 2 a., 6.3 v. 1 a.	21/9
350-0-350 v. 80 mA., 6.3 v. 2 a., 5 v. 2 a.	18/11
2.0-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-300 v. 100 mA. 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-300 v. 130 mA., 6.3 v. 4 a., c.t., 6.3 v. 1 a., suitable for Mullard 510 Amplifier	29/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	29/6
425-0-425 v. 200 mA., 6.3 v. 4 a., 5 v. 3 a.	47/9

ELIMINATOR TRANSFORMERS.

120 v. 40 mA., 5-0-5 v., 1 a.	14/9
90 v. 15 mA., 6-0-6 v. 250 mA.	9/11

FILAMENT TRANSFORMERS

6.3 v. 1.5 a.	5/9	12 v. 1 a.	7/9
6.3 v. 2 a.	7/6	6.3 v. 3 a.	9/11
0-4-6.3 v. 2 a.	7/9	6.3 v. 6 a.	17/6
		12 v. 3 a. or 24 v. 1.5 a.	17/9

AUTO (Step Up/Step Down) TRANSFORMERS

50-80 watts 110-120 v./230-250 v.	11/9
150 watts 110-120 v./200-230-250 v.	27/9

OUTPUT TRANSFORMERS

Midget Battery Pentode 66:1 for 3S4, etc.	3/9
Small Pentode 5,000Ω to 3Ω	3/9
Standard Pentode 5,000Ω to 3Ω	5/9
Standard Pentode 8,000Ω to 3Ω	5/9
Push-pull 8 watts 6V6 to 3 ohms	8/9
Push-pull 8 watts EL84s to 15 ohms	8/9
Push-pull 10-12 watts 6V6 to 3Ω or 15Ω	16/9
Push-pull 10-12 watts to match 6V6 to 3-5-8 or 15Ω	17/9
Push-pull EL84 to 3 or 15 ohms 10-12 watts	17/9
Push-pull Ultra Linear for Mullard 510	27/6
Push-Pull 15-18 watts, sectionally wound, 6L6, KT66, etc., for 3 or 15 ohms	23/9
Push-pull 20 watt high-quality sectionally wound. 6L6. KT66, etc., to 3 or 15Ω Fully shrouded	47/9

MICROPHONE TRANSFORMERS

120:1 High quality, clamped	6/9
120:1 High quality Mu metal screened	8/9

SMOOTHING CHOKES

250 mA., 8 H., 100Ω	11/9	80 mA., 10 H., 350Ω	5/6
150 mA., 7-10 H., 250Ω	11/9	60 mA., 10 H., 400Ω	4/11
100 mA., 10 H., 200Ω	8/9	1 amp. 0.5Ω L.T. type	6/6

FARMEKO MAINS TRANSFORMERS. Fully shrouded.

500-0-500 v. 120 mA., 6.3 v. 4 a., 5 v. 3a.	31/6

HIGH FIDELITY 12-14 WATT AMPLIFIER TYPE A11

PUSH-PULL ULTRA LINEAR OUTPUT "BUILT-IN" TONE CONTROL PRE-AMP STAGES



Two input sockets with associated controls allow mixing of "mike" and gram. as in A.10 High sensitivity. Includes 5 valves: ECC83, ECC83, EL84, EL84, 5Y3. High Quality sectionally wound output transformer specially designed for Ultra Linear operation and reliable small condensers of current manufacture. INDIVIDUAL CONTROLS FOR BASS AND TREBLE "Lift" and "Cut." Frequency response ± 3 D.B. 30-30,000 c/cs. Six negative feedback loops. Hum level 60 D.B. down. ONLY 23 millivolts INPUT required for FULL OUTPUT. Suitable for use with all makes and types of pick-ups and microphones. Comparable with the very best designs. For **STANDARD** or **LONG PLAYING RECORDS.** For **MUSICAL INSTRUMENTS** such as **STRING BASS, GUITARS, etc. OUTPUT SOCKET** with plug provides 300 v. 30 mA. and 6.3 v. 1.5 a. For supply of a **RADIO FEEDER UNIT.** Size approx.: 12.9-7in. For A.C. mains 200-250 v. 60 c/cs. Output for 3 and 15 ohm speakers. Kit is complete to last nut. Chassis is fully punched. Full instructions and point-to-point wiring diagrams supplied. (Or factory built 45/- extra). ONLY **8 Gns.** Carr. 10/- If required louvred metal cover with 2 carrying handles can be supplied for **18/9. TERMS ON ASSEMBLED UNITS. DEPOSIT £4/3** and **6** monthly payments of **£4/3.** Send S.A.E. for illustrated leaflet detailing Ready-to-assemble Cabinets, Speakers, Microphones, etc., with cash and credit terms.

R.S.C. PORTABLE GUITAR AMPLIFIERS

JUNIOR 5 WATT. High Quality Output. Separate Bass and Treble "cut" and "boost" controls. Sensitivity 15 mv. High Flux 8in. l/speaker. Input sockets for Radio/Tape or Gram Pick-up and Mike Instrument Pick-up. Handsome strongly made cabinet (size approx. 14 × 14 × 7in.). Finished in attractive and durable Policron.e and fitted carrying handle.

£8/19/6 Carr. 7/6. Or Deposit **£1** and nine monthly payments **£1.**

Send S.A.E. for leaflet.

SENIOR 10 WATTS. High-Fidelity Push-Pull output. Separate Bass and Treble "cut" and "boost" controls. Twin separately controlled high gain inputs so that two instruments such as Guitar and String Bass can be used at the same time. Two Loudspeakers are incorporated a 12in. P.M. for Bass notes and 1 7 × 4in. elliptical for Treble. Cabinet is well made and finished as Junior model. Size approx. 18 × 18 × 8in. **15 Gns.** Fits 10/- carr **H.P. TERMS. DEPOSIT 34/9** and 9 monthly payments **34/9.** Both models for 200-250 v. A.C. mains.

COLLARO CONTINENTAL 4 SPEED DE LUXE MIXER AUTO-CHANGERS with TX8P Transcription Cartridge for standard and L.P. records. For normal 200-250 v. A.C. mains. Few only at unrepeatable price of **£10/19/6.** Carr. 4/6

COLLARO CONQUEST 4-SPEED AUTO-CHANGERS. With stereo pick-up with turnover head. Latest model for 200-250 v. A.C. mains. **£6/19/6** Carr. 4/6.

B.S.R. MONARCH AUTO-CHANGERS. Type UA8. 4 speed T/O Pick-up with sapphire stylus **£6/19/6.** Carr. 4/6.

Any of the above supplied with T/O stereo/monaural head for **£1** extra.

COLLARO JUNIOR. 4-speed Single Players with Hi-Fi T/O crystal pick-up head. **£3/19/6.**



LOUDSPEAKER IN POLISHED WALNUT FINISHED CABINET. Gauss 12,000 lines. Speech coil 3 ohms or 15 ohms. Only **£4/19/6.** Carr. 5/-. **TERMS: DEPOSIT 11/-** and 9 monthly payments of **11/-.**

12in. 20 WATT 13,000 line l/speakers 15 ohms in Cabinet finished as above. Size 16 × 16 × 8in. **£7/19/6** or Deposit **17/9** and 9 monthly payments of **17/9.**

ACOS HGP80 Hi-Fi Crystal Cartridges. (Turnover type with sapphire styles). Standard replacement for Garrard and Collaro. Only **19/9.** B.S.R. Psi-Fi **19/9.** Garrard GC2 **19/9.** Acos Stereo/monaural **49/9.**

ACOS HIGH FIDELITY PICKUPS. GP84 with HGP80/82 Cartridge. Turnover sapphire styli, cream finish. Limited number at approx. half price. Only **35/9.**

R.C.A. TRANSCRIPTION PICK-UPS. Variable Reluctance type for standard and L.P Records. Normal price approx **£14.** Limited number brand new perfect at **£3/19/6.**

PLESSEY DUAL CONCENTRIC 12in. P.M. SPEAKERS

(15 ohms), consisting of a high quality 12in. speaker of orthodox design supporting a small elliptical speaker ready wired with choke and condensers to act as tweeter. This high fidelity unit is highly recommended for use with our A11 or any similar amplifier. Rating is 10 watts. Gauss 12,000 lines. Price only **£5/19/6.** Or Deposit **12/9** and 9 monthly payments of **12/9**

R.S.C. (LEEDS) LTD. MANCHESTER, LEEDS & BRADFORD

Open to callers at the following branches:—
5-7 County (Mecca) Arcade, Leeds, 1.
54-56 Morley Street (above Alhambra), Bradford.
8-10 Brown Street (Market St.), Manchester, 2.

TERMS: C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/9 extra on all orders under £2, 2/9 extra under £5 unless carriage stated. Trade supplied. Post orders to: **Mail Order Dept.**
29-31 Moorfield Road, Leeds, 12.

HEAVY DUTY EX GOVT. SELENIUM RECTIFIERS

With large square aluminium cooling fins. 12 v. 15 amp. F.W. (Bridge). Limited number. 19/9.

VIBRATORS

Oak and Wearite, synchronous 7-pin, 2 v. 7/9. 6 v. 8/3. 12 v. 4-pin non-synchronous 7/9.

EX. GOVT. MAINS TRANSFORMERS

All 200-250 v. 50 c/s. input.
Fr. 0-110-200-220-250 v. 275-0-275 v. 100 mA., 6.3 v. 7 a., 5 v. 2 a. 22/9
250 v. 60 mA. 6.3 v. 2 a. 10/11
6.3 v. 5.3 a., 6.3 v. 1 .5 a., 6.3 v. 0.5 a., 5 v. 3 a., 5 v. 3 a., 5 v. 2 a., High Insulation, Potted. 27/9
6.3 v. 2 a., 6.3 v. 1 a., 6.3. v. 2 a., 6.3 v. 0.5 a., 5 v. 3 a., 6.3 v. 5 a., 5 v. 6 a., Potted. 27/9
340-0-340 v. 90 m.a., 700-0-700 v. 100 m.a., Potted 27/9
AUTO 500 watts 0-215-220-225-230-235-240 v. Carr. 22/9 ..... 50 watts, 0-110/130-220/250 v. 8/11

EX. GOVT. SMOOTHING CHOKES

60 mA. 10 h. 400 ohms 3/11 — 150 mA. 10 h. 100 ohms 10/11
80 mA. 20 h. 900 ohms 5/11 — 120 mA. 12 h. 100 ohms 9/9
100 mA. 5 h. 100 ohms 3/11 — 200 mA. 5-10 h. 100 ohms 11/9
100 mA. 10 h. 100 ohms 6/9 — 250 mA. 5 h. 50 ohms 10/9

GARRARD RECORD PLAYING UNITS

Dry battery operated. Consisting of motor, turnable and pick-up. For standard 45 r.p.m. records. Only £3/18/6.

EX. GOVT. CASES

Well ventilated, black crackle finished, undrilled cover. Size 14×10×8½in. high. IDEAL FOR BATTERY CHARGER OR INSTRUMENT CASE. COVER COULD BE USED FOR AMPLIFIER. Only 9/9, plus 2/9 post.

WAYNE, KERR SIGNAL GENERATORS, TYPE CT53



8.9 to 300 megacycles. Output 1 micro-volt to 10 milli-volts. Five position switched attenuator. Variable multiplier 1 to 10, calibrated 0-90 db. G.W. square wave and sine wave outputs. Vernier tuned, 6 Band Coil Turret, Foiled "C" core Transformers. Stabilised H.T. All voltage supplies including mains, R.F. filtered. External mod. by sine wave from 50 c.p.s. to 10 kc/s. or pulses down to 2μsec. Complete with all valves and charts.
SUITABLE FOR ALIGNING T.V. and V.H.F. RADIO. For 200-250 v. A.C. mains. Beautifully made to very high standards. Worth over £100. Very limited number available at only 17 Carr. 15/- GNS.

MICRO-AMMETERS

500 Micro-amp. Scaled in Decibels. Diameter 3in. Flush mounting 59/6
0-50 micro-amp. Diameter 2½in. approx. Scaled 0-100. Flush mounting 39/6
METER RECTIFIERS 0-5 mA. 15/6

VOLTMETERS

0-300 v. A.C., 50 c.p.s. Diameter 3½in. approx. M.I. Only 16/9

MULTI-METERS

CABY A10 Basic meter, sensitivity 155 micro-amps. A.C. and D.C. Ranges. £4/10/-.
CABY B20. Sensitivity up to 10,000 ohms per volt A.C. and D.C. £6/10/-.
TAYLOR MODEL 137A. 20,000 ohms per volt. 20 Mega. 20 Ranges. £10. S.A.E. will bring leaflet on any of above.

V.H.F./F.M. A.M. 4 WAVEBAND RADIO RECEIVERS

Complete in beautiful veneered Walnut Cabinet. Covers normal Short, Medium and Long wavebands, plus V.H.F. Brand new and covered by usual 12 months' guarantee.
For 200-250 v. 50 c.p.s. A.C. mains 12½ Carr. 10/- GNS.

RADIOGRAM CABINETS

For callers only. Console type size. Beautiful traditional design. Worth £25 at least. - Only 12 gns. Suitable AM/FM 3 waveband chassis £12/19/6. Table model type. Polished walnut finish 39/6. SPECIAL OFFER OF ABOVE CONSOLE CABINET and CHASSIS, 4-SPEED AUTOCHANGER and 8in. SPEAKER. A really exceptional opportunity. Only 31½ GNS.

RELAYS

Carpenters Type Polarised 2×9,500 turns at 1,685 ohms. 13/9.
Miniature Moving Coil Differential Type. Single pole 2-way, or centre stable. Two coils each 350 ohms. Minimum operating current 140 micro-amps, nominal 400 micro amps., maximum 8 milliamps. Two-way contact current 100 m.a. at 5 v. A.C. or D.C. Size approx. 1½×1×1in. 12/9.
Miniature type G.E.C. 670 M1092 sealed, wire ends, 4 c/overs, platinum. 12/9.

FIELD TELEPHONES

Complete including bell. Suitable for office, warehouse, factory or outdoor communication. Operate with small dry battery lasting many months. Supplied complete in wooden carrying case. Only 59/6 Carr. 5/- each.

VARLEY 2 v. 14 A.H. EX GOVT. ACCUMULATORS

New Boxed. Only 5/9 each, 3 for 15/-, plus 3/6 carr.

R.S.C. (Leeds) Ltd. LEEDS, BRADFORD and MANCHESTER

Mail Orders to 29/31 Moorfield Road, Leeds, 12.
For Terms see double page advert., pages 142 & 143.

Open to callers at following branches:
5-7 County (Mecca) Arcade, Briggate, Leeds, 1.
54-56 Morley Street (above Alhambra Theatre), Bradford.
8-10 Brown Street (Market St.), Manchester, 2.

BENTLEY ACOUSTIC CORPORATION LIMITED

The Valve Specialists

38 CHALCOT ROAD, LONDON, N.W.1

Telephone: PRIMROSE 9090 — Nearest Underground: Chalk Farm

EXPRESS POSTAL SERVICE! ALL ORDERS DESPATCHED SAME DAY AS RECEIVED.
TELEPHONE AND TELEGRAM ORDERS FOR CASH ON DELIVERY SERVICE ACCEPTED UP TO 3.30 P.M.

OA2 ..17/6	6BE6 6/-	6U4GT 12/6	12SA7 8/6	150B2 15/-	ES0F 1.80/-	EF9 .8/6	GZ30 .. 9/-	PL36 ..12/-	U50 .. 6/6	UY1N 13/7	Transistors
OB2 ..17/6	6BG6G 8/3	6U5G 7/6	12SK7 6/-	185BT 3/3	EA50 2/-	EF22 ..14/-	Gz32 ..10/-	PL83 ..8/6	U52 .. 6/6	UY21 13/11	and Diodes
OZ4GT 6/-	6BH6 7/6	6V6G 7/6	12SQ7 11/6	185BTA 3/3	EA76 9/6	EF36 .. 4/-	GZ33 19/11	PL81 10/6	U78 .. 6/6	UY41 7/6	GD3, 4, 5, 6,
1A5 .. 6/-	6BJ6 6/-	6V6GTG 9/-	14S7 .. 7/6	806 ..10/6	EABC80 9/-	EF37A 9/-	GZ34 14/-	PL82 .. 7/6	U107 ..16/7	UY85 7/-	8 .... 4/-
1A7GT 12/-	6BQ7A 15/-	6X4 .. 5/-	13Y4 10/6	807 .. 7/6	EAC91 4/6	EF39 .. 5/6	HABC80	PL83 .. 9/-	U191 ..16/7	VM84B 15/-	GA70 .. 4/-
1C5 ..12/6	6BR7 15/-	6X5GT 6/-	19AQ5 10/6	807 .. 7/6	EAF42 9/-	EF40 ..15/-	12/6	PL84 12/6	U251 ..14/-	VP4 ..15/-	GA73 .. 4/-
1C6 ..17/6	6BW6 8/6	6/30L2 10/-	19BG6G 13/3	4033L 12/6	EB34 2/6	EF41 .. 9/-	HL2 .. 7/6	PL620 18/7	U281 19/11	VP4B 23/2	GA79 .. 4/-
1H5GT 10/6	6BW7 6/-	7B6 ..£1/3	19H1 10/-	5763 13/6	EB41 8/6	EF42 ..10/6	HVR2 20/-	PM24M £1/3	U282 23/7	VP23 .. 9/6	GA91 4/-
1L4 .. 2/6	6BX6 6/-	7B7 .. 8/6	20D1 ..15/3	AC6PEN 7/6	EB91 4/-	EF50(A) 7/-	HVR2A 6/-	PX4 ..10/6	U301 23/3	VP41 6/-	GA91 4/-
1LD5 .. 5/-	6C4 .. 5/-	7C5 .. 8/-	20F2 ..26/6	ATP4 5/-	EBC33 5/-	EF50(E) 5/-	KT2 .. 5/-	PY31 16/7	U329 14/-	VR105 5/-	GA96 6/-
1LN5 .. 5/-	6C6G 6/6	7C6 .. 8/-	20L1 ..26/6	AZ31 10/-	EBC41 8/6	EF54 .. 5/-	KT33C 10/-	PY32 11/6	U339 16/7	VR150 7/6	GA91 5/-
1N5GT 12/6	6CD6G 24/6	7D6 ..10/6	20P1 ..26/6	AZ41 12/11	EBC81 8/-	EF73 10/6	KT36 29/10	PY80 7/6	U404 .. 8/6	VT501 5/-	GA95 5/-
1R5 .. 6/6	6CH6 8/6	7H7 .. 8/-	20P3 ..23/3	B36 ..15/-	EBF89 9/-	EF80 .. 6/-	KT41 12/6	PY81 9/6	U801 29/10	VT501A 5/-	GA310 22/-
1S4 .. 6/-	6E5 ..12/6	7S7 .. 9/6	20P4 ..26/6	BL63 7/6	EBF83	EF85 .. 6/-	KT44 12/6	PY82 7/-	U4020 16/7	VU39 8/-	GA211 40/-
1S5 .. 6/-	6C4 .. 5/-	7Y4 .. 7/6	20P5 ..23/3	CBL31 23/3	12/11	EF86 ..10/6	KT61 12/6	PY83 9/6	UABC80 9/-	W76 .. 5/6	GC16 54/-
1T4 .. 5/6	6F6G .. 7/-	8D3 .. 4/6	25A6G 10/6	CCH35 23/3	EBF89 9/6	EF89 .. 9/-	KT63 7/-	PZ30 19/11	UAF42 9/6	W77... 4/6	GC19 ..54/-
1U4 ..12/6	6F12 .. 4/6	9BW6 15/3	25L6GT10/-	CL33 19/3	EBL21 23/3	EF91 .. 4/6	KT66 15/-	QP21 7/-	UB41 12/-	W81M 6/-	GC26 ..44/-
1U5 .. 6/-	6F13 ..11/6	10C1 ..15/-	25Z4G 9/6	CV63 ..10/6	EBL31 23/3	EF92 .. 4/6	KTW61 6/6	Q5160/15 14/6	UBC41 11/6	X41 ..15/-	GC28 ..32/-
2X2 .. 4/6	6F23 10/6	10C2 ..26/6	25Z5 9/6	CY1 18/7	EC52 .. 5/6	EF97 ..13/3	KTW62 7/6		UBC81 11/4	X61 ..12/6	GC36 ..42/-
2A4 .. 6/-	6F33 7/6	10F1 ..26/6	25Z6G 10/-	CY31 ..16/7	EC54 .. 6/-	EK32 9/6	KTW63 6/6	10/6	UBF80 9/-	X63 .. 9/-	GC44 ..26/-
2A5 ..10/6	6G6 .. 6/6	10F9 ..11/6	27SU 19/11	D1 .. 3/-	EC70 ..12/6	EL32 5/-	KTZ41 8/-	R12 .. 9/-	UBF89 9/6	X65 ..12/6	GC45 ..32/-
2B7 ..12/6	6H6GT 3/6	10LD3 8/6	28D7 .. 7/-	D15 ..10/6	EC92 ..13/3	EL33 12/6	KTZ63 7/6	R18 ..14/-	UBL21 23/3	X66 ..12/6	GC53 ..32/6
2D6 .. 5/-	6J5G .. 5/-	10LD11	30C1 .. 8/-	D43 ..17/3	ECC31	EL34 6/-	L63 .. 6/-	R19 19/11	UCC84 14/7	X76M 14/-	GC56 ..32/-
3Q4 .. 7/6	6J6 .. 5/6	15/11	30F5 .. 6/-	D77 .. 4/-	ECC32 5/6	EL35 26/6	MU14 8/-	RK34 7/6	UCC85 9/-	X78 ..23/3	GC70 ..14/-
3Q5GT 9/6	6J7G .. 6/-	10P13 15/-	30FL1 10/-	DAF91 6/-	ECC33 2/6	EL41 9/-	N37 23/3	SP41 .. 3/6	UCF80 16/7	X79 .. 23/3	GC71 ..14/-
3S4 .. 7/-	6K8GT 8/-	10P14 19/3	30L1 .. 8/-	DAF96 8/6	ECC34 24/7	EL42 10/6	N78 19/11	SP61 .. 3/6	UCH21 23/3	XD(1.5) 6/6	GC72 ..17/-
3V4 .. 7/6	6K8G .. 6/6	13A6 .. 7/6	30P1 ..15/-	DC90 8/6	ECC35 9/6	EL81 12/6	N108 23/3	SU35 ..26/6	UCH42 9/6	XF21 15/-	GC75 ..26/-
5R4GY 17/6	6K8G .. 6/6	13AC6 15/3	30P11 10/6	DF96 15/-	ECC40 23/3	EL84 7/6	N306 20/7	T41 .. 23/3	UCH81 9/6	XFY12 9/6	GC76 .. 4/-
5U4G 6/6	6K25 19/11	13AD6 17/3	35A5 21/3	DF91 .. 3/6	ECC81 6/-	EL85 13/11	N339 15/-	TDD4 12/6	UCL82 11/6	XFY34 17/6	GC76 ..15/-
5V4G 10/-	6L1 ..23/3	13AE6 13/11	35L6GT 9/6	DF96 3/6	ECC82 6/6	EL91 5/-	PABC80	TP22 ..15/-	UCL83 19/6	XH(1.5) 6/6	GC77 ..21/-
5Y3GT 6/6	6L6G .. 9/-	13AH6 12/6	35W4 7/6	DF97 9/-	ECC83 7/6	EL95 10/6	13/11	TP25 ..15/-	UF41 .. 9/-	Y63 .. 7/6	GC78 ..17/-
5Z3 ..13/6	6L7GT 7/6	13D1 ..10/6	35Z3 10/6	DH63 6/6	ECC84 9/6	EM34 9/6	PCC84 9/-	TP26F 12/3	UF42 12/6	Z63 .. 7/6	GC78D 27/-
5Z4G 9/-	6L18 13/-	13E1 .. 6/-	35Z4GT 6/-	DH76 5/-	ECC85 9/6	EM71 23/3	PCC85 9/6	U19/14 6/6	UF80 10/6	Z66 ..17/6	GC81 18/-
6A8G 9/-	6L19 23/3	13AU6 23/3	35Z5GT 9/-	DH77 7/-	ECC88 18/-	EM80 9/-	PCC88 18/-	U16 ..19/-	UF85 9/-	Z77 .. 4/6	GC170 35/-
6AC7 4/-	6LD20 15/11	13AU7 6/6	43 ....16/-	DK40 21/3	ECF80 10/6	EM81 9/-	PCC89 11/6	U18/20 8/6	UF86 17/11		GC200 54/-
6AG5 8/6	6N7 .. 8/-	13AV6 12/3	50C5 ..10/-	DK91 6/6	ECF82 10/6	EM84 10/6	PCF80 8/-	U19 26/-	UF89 9/-	SPECIAL OFFER!	GC201 35/-
6AK5 8/-	6P28 13/6	13AX7 7/6	90CD6G	DK92 9/-	ECH21 23/3	EN31 27/-	PCF82 10/6	U25 .. 9/-	UL41 9/6		GC202 35/-
6AL5 4/-	6P28 26/6	13BA6 5/-	26/6	DK96 3/6	ECH35 6/6	ET61 5/-	PCF86 15/-	U26 ..10/-	UL84 8/6	3 PCL82	GC203 35/-
6AM6 4/6	6Q7G 6/6	13BE6 9/-	50L6GT 9/6	DL66 17/6	ECH42 9/-	EY83 16/7	PCL82 10/-	U25 17/11	UL46 14/6	3 PCC84	GA101 22/-
6AQ5 7/6	6S7G 10/-	13BH7 21/3	53KU 19/11	DL67 15/-	ECH81 9/-	EY86 9/-	PCL83 10/6	U26 ..10/-	UL84 8/6	1 PL81	GA102 26/-
6AT6 7/-	6SA7GT 8/6	13JTGT 9/6	72 .... 6/6	DL92 7/-	EZ40 .. 7/-	PCL84 12/6	U31 .. 9/6	UM4 17/3	GA103 15/-
6AU6 10/-	6SC7 .. 7/6	12K5 17/11	78 .... 6/6	DL94 7/6	13/11	EZ41 .. 7/-	PCN28 4/6	U33 ..20/6	UM80 15/6	2 EF80	GA104 13/-
6AV6 12/3	6SL7GT 5/6	12K7GT 5/6	80 .... 9/-	DL96 8/6	ECL80 9/-	EZ80 .. 7/-	PEN45 19/6	U35 ..26/6	URIC 12/7	All nine	GA105 14/-
6B8G 4/6	6SN7GT 5/6	12K8GT14/-	83 ....15/-	DL810 10/6	ECL82 10/6	EZ81 .. 7/-	PEN46 7/6	U37 ..26/6	UU5 ..26/6	valves £3	GA106 13/-
6BA6 7/6	6SQ7GT 5/-	12Q7GT 5/-	85A3 ..15/-	DM70 7/6	ECL83 19/3	FC4 ..15/-	PL83 ..19/3	U45 .. 9/-	UU9 .. 7/6	post free.	XC101 18/-

Terms of business:—Cash with order or C.O.D. only. Post/Packing charges 6d. per item. Orders over £3, post free. C.O.D. 2/6 extra. Any parcel insured against damage in transit for 6d. extra. We are open for personal shoppers. Mon-Fri. 8.30-5.30. Sats. 8.30-1 p.m.

Latest catalogue of over 1,000 different valves, also metal rectifiers, volume controls, electrolytic condensers, transistors, germanium diodes, valve holders, and Hivac miniature valves, with full terms of business, price 6d.

All valves boxed, fully guaranteed, and new manufacturers' stock or government stores surplus. First-grade goods only, no seconds or rejects. Please enquire for any type not listed. S.A.E. please

REPLACEMENT, REBUILT T.V. TUBES 12 months guarantee

Carr. & Ins. 15/6.

21in. tube **£8/10/-**. 17in. tube **£7/10/-**. **£2** allowed on old tube. 12, 14, 15in., tubes **£5/10/-**. **£1** allowed on old tube. **Terms available over 10 weeks.**

NEW YEAR BARGAIN SALE!

PLESSEY T.V. CHASSIS FOR SPARES 9/6

56 resistances. 54 condensers. 13 valve holders. 4 transformers, Chokes 250 ma. Metal rectifiers 300 volts @ 250 ma. Fuse panel. Focus magnets. Plugs. Sockets. Carr. 7/6.

17" T.V.'s 17½ gns.

Modern CHASSIS, modified

Complete 17in. TUBE. VALVES — SPEAKER — KNOBS. Tuned ITV/BBC. Ready to use, fully guaranteed, TUBE 12 months, CHASSIS and VALVES 3 months. Cabinet to fit **£1/11/6** if ordered with set. Salvage. Set—tube—cabinet despatched separately. Carr. & Ins. on set £1/5/-; on Cabinet 8/6.

Fully Assembled Sets delivered 75 miles London

FAMOUS TAPE RECORDER

LISTED ~~29~~ gns. NOW 18 gns. UNREPEATABLE VALUE

Famous manufacturer. Huge purchase allows us to offer at this amazing price. Beautifully styled, rexine covered cabinets. Colours: Red, Grey, Black. Storage space for 4 tapes, mike and lead. Incorporating the latest B.S.R. Deck. LOOK AT THESE EXPENSIVE FEATURES. Controls: Record/Playback switch and rewind with interlocking device to prevent accidental erasure. Tone and volume controls. Superimpose and electronic eye. Small overall size 14½ × 14½ × 7½in. Lightweight, only 21lb. 5½in. standard tape. Terms: Carr. & Ins. 12/6. Microphone **27/6** extra. Tapes **19/9.**

DELUXE TAPE RECORDER

LISTED ~~31~~ gns. our price 22 gns.

Beautifully styled rexine covered cabinet in Red/Beige with carrying handle. Size: 14½ × 13 × 9½in. Storage comp. in lid for tapes and mike. Speed 3¾in. per second. Compact set using latest 5 valve amplifier with 4-stage amplification and separate valve for Bias osc. 2 controls. Contains 7 × 4in. elliptical speaker and incorporating B.S.R. Tape deck. 5½in. standard tape. 3 months' guarantee. Ins. & Carr. 12/6. Deposit **£3** plus Ins. Carr. and 20 payments of **17/-.**

"STUDIO TWIN"

LISTED ~~40~~ gns. NOW 29 gns.

Quality Tape Recorder at this amazing reduced price. 7in. 1,200ft. Standard reels. Latest Studio 3-speed Deck, 1¾, 3¾, 7½ I.P.S. Includes Twin Tracks, Reverse counter, Pause control and magic eye recording indicator. Volume and tone control, superimpose switch. 3 watts output. Attractive design cabinet in beige. Size 19in. × 13in. × 8in. Ins. & Carr. 12/6.

EXTRAS: Microphone **27/6.** Tape **25/-.**

RECORD PLAYER CABINET R.P.9 19/6

Exceptional offer. A lightweight portable player Cabinet in two-tone Rust and Cream. Famous manufacturer. Size 14½ × 11½ × 6in. Complete with moulded deck board of attractive design. Takes B.S.R. TU9 single player; 2 control Amplifier; 5in. round Speaker. Post, Packing & Ins., 4/6.

B.S.R. TAPE "MONARDECK"

Single speed. 3¾in. per sec. Uses 5½in. spools. **£9.9.6**

Complete with Record-Playback and erase heads. Simple control for R/P.B. and fast rewind with safety switch for record. Size: 13 × 8½ × 2½in. Colours: two-tone grey. P. & P. 4/6. Deposit **60/-** plus P. & P. and 20 weeks at **8/-.**

TAPE RECORDER AMPLIFIER

Compact, well designed 5 valve amplifier. Output 3.5 watts. Valve line up—ECC83, double triode first audio amplifiers, ECL82 triode pentode further audio amplifier and output valve, 6BW6 bias and erase oscillator, EM84 record level indicator. EZ80 H.T. rectifier. Input for mike, radio and gram. Controls: record playback volume and on/off playback tone. Dia. 8½ × 3 × 4½in. ins. and carr. 4/6. Terms. **£7.19.6**

EXTRAS: Knobs **2/6** per set. Beautiful Perspex dial plate, Complete with sockets for mike, radio and superimposed switch **3/6.**

NEW LOOK AMPLIFIER

Ideal stereo attachment. Brown/Ivory cabinet, carrying handle. Contains high flux 8in. speaker. A.C. mains. 3 valves—10F3, 10P14, U404. Max. output 5 watts. 14 × 11 × 6½in. Completely converted. Ideal stereo, Mike, Guitar, Records. 2 units give world of amusement and special stereo effects. 12 months' guarantee. P. & P. 5/6. Deposit **30/-** plus P. & P., 10 weeks at **8/-.** **59/6**

AMPLIFIERS. All portable 12 months' guarantee

MK. D5. **39/6**

Simple circuit employing ECL80 triode pentode output valve giving 3 watts output. A.C. only. Mains isolated. Single control for volume and on/off switch with knob. P. & P. 3/6.

MK. D2A. **79/6**

Latest design incorporating negative feedback, giving 4 watts undistorted output. Valves: ECL82, triode pentode and contact cooled metal rectifier. Tone and volume control panel on flying leads with compact amplifier chassis suitable to mount under modern autochangers to give easy mounting in small cabinet. A.C. only. Mains isolated. Output for 2-3 ohms.

MK. D3A. **89/6**

As above de luxe model, with separate tone controls for treble and bass.

PORTABLE AMPLIFIER (Salvage) **69/7**

3 valves. 5 watts output. Size 7 × 5 × 4in. An ideal amplifier for stereo record players, Tape Recorders, Microphone, Baby Alarm, etc. Volume and tone controls. 200-250 v. A.C./D.C. P. & P. 4/6.

RECORD PLAYER CABINET R.P.2 FOR ONLY 59/6

Made by famous manufacturer. In polka dot cloth with clipped lid and carrying handle. Size: 16 × 14½ × 8½in. deep. Carr. & Ins. 4/6. Will take B.S.R. Monarch Autochanger, **£6/19/6**; 7in. × 4in. Elliptical Speaker **15/9**; Our Mk. D2A Portable Amplifier **79/6.**

BARGAIN SPEAKER **5/9**

8in. P.M. Repaired cone defect not affecting reproduction quality.

8in. P.M. SPEAKER **6/9**

As above but with output transformer.

8in. P.M. SPEAKER **9/9**

Perfect quality. Fitted output transformer.

ELLIPTICAL SPEAKERS **15/9**

8 × 3in. and 7 × 4in. Brand new. Also 9 × 4in. at **19/9.** P. & P. on each 2/9.

EXTENSION SPEAKERS 19/9

8in. P.M. Speakers fitted into polished cabinets. Standard matching to any receiver. (Complete.) Switch and flex included. P. & P. 3/9.

TELEPHONE SETS 7/9

X.W.D. Wireless remote control unit. E.M.K.II (ZA11954). Including morse tapper, switched, jack plugs, etc. Less phone. Ins. and carr. 3/6.

SOLO SOLDERING TOOL ONLY 12/6

110 v., 6 v. or 12 v. (special adaptor for 200/250 v., **10/-** extra). Automatic solder feed including 20ft. reel of Ersin 60/40 solder and spare parts. It is a tool for electronic soldering or car wiring. Revolutionary in design. Instantly ready for use and cannot burn. In light metal case with full instructions for use. Post 3/6.

DELUXE TAPE RECORDER CABINET ONLY 29/9

Beautifully made Tape Recording Cabinet. Size: 18 × 10½ × 7in. Covered in two-tone coloured rexine cloth. Stylish design. Carrying handle with detachable lid. Easily adapted to Record Player Cabinet. Exceptional value at this very low price. P. & P. 4/6.

DUKE & CO. (LONDON) LTD.

621/3 Romford Road, Manor Park, E.12. ILF 6001/3

Send for a FREE CATALOGUE

STERN'S MULLARD DESIGNS

COMPLETE KIT OF PARTS

Designed by MULLARD—presented by STERNS strictly to specification



MULLARD "5-10" MAIN AMPLIFIER

For use with the MULLARD 2-stage pre-amplifier with which an undistorted power output of up to 10 watts is obtained. We supply SPECIFIED COMPONENTS AND NEW MULLARD VALVES including PARMEKO MAINS TRANSFORMER and choice of the latest Ultra-linear PARMEKO or the PARTRIDGE Output Transformer.

Price: COMPLETE KIT (Parmeko O/put Trans.)..... **£10.0.0**

Alternatively we supply ASSEMBLED AND TESTED.... **£11.10.0**

ABOVE INCORPORATING PARTRIDGE OUTPUT TRANSFORMER £1/6/- extra.

MULLARD'S 2-VALVE PRE-AMPLIFIER TONE CONTROL UNIT



Employing two EF86 valves and designed to operate with the Mullard MAIN AMPLIFIER but also perfectly suitable for other makes. Supplied strictly to MULLARD SPECIFICATION and incorporating:

- Equalisation for the latest R.I.A.A. characteristics.
- Input for Crystal Pick-ups and variable reluctance magnetic types.
- Input (a) Direct from High Imp. Tape Head. (b) From a Tape Amplifier or Pre-Amplifier.
- Sensitive Microphone Channel.
- Wide range BASS and TREBLE Controls.

Price: COMPLETE KIT OF PARTS **£6.6.0** ASSEMBLED AND TESTED **£8.0.0**

COMPLETE MULLARD 5-10 AMPLIFIER



The popular and very successful complete "5-10" incorporating Control Unit providing up to 10 watts high quality reproduction.

Specified components and new MULLARD VALVES are supplied including PARMEKO MAINS TRANSFORMERS and choice of the latest PARMEKO or PARTRIDGE ULTRA Linear Output Transformers.

Price: COMPLETE KIT. **£11.10.0**

Alternatively we supply ASSEMBLED AND TESTED. **£13.10.0**

Hire Purchase (Assembled Amp. only). Deposit £3/14/-, 12 months at 19/10.

ABOVE incorporating PARTRIDGE OUTPUT TRANSFORMER £1/6/- extra.

COMPLETE MULLARD 3-3

A VERY HIGH QUALITY AMPLIFIER DEVELOPED FROM THE VERY POPULAR 3-VALVE 3-WATT AMPLIFIER DESIGNED IN THE MULLARD LABORATORIES.

Price for COMPLETE KIT OF PARTS **£7.10.0**
(Plus 6/6 carriage and insurance).

Alternatively supplied ASSEMBLED AND FULLY TESTED (Plus 6/6 carriage and insurance).... **£8.19.6**

H.P. TERMS: Deposit £2 and 8 monthly payments of £1.

Our kit is complete to the MULLARD specification including supply of specified components, valves and PARMEKO OUTPUT TRANSFORMER. We also include switched inputs for 78 and L.P. records plus a Radio position. Extra power to drive a Radio Tuning Unit is also available.

STEREO "3-3" MAIN AMPLIFIER

Comprises two MULLARD 3-3 Main Amplifiers on one chassis. Operates with MULLARD STEREO PRE-AMPLIFIER. Output power 6 watts. Inputs for Crystal Pick-up and Radio Tuner.

KIT OF PARTS..... **£10.0.0** or ASSEMBLED..... **£11.15.0**

Mk. II "Fidelity" FM TUNING UNIT

An attractively presented Unit incorporating MULLARD PERMEABILITY TUNING HEART and corresponding Mullard valve line-up. Very suitable to operate with our Mullard Amplifiers.

FOR THE CONSTRUCTOR.... **£10.10.0** or ASSEMBLED.... **£14.5.0**

SPECIAL CASH ONLY OFFER ! !

This very attractive PORTABLE AMPLIFIER CASE together with a good quality GRAM AMPLIFIER and a matched P.M. SPEAKER. ALL FOR ONLY (plus 7/6 carr. and ins.). **£8.7.6**

The Amplifier consists of a 3-stage design incorporating the 3 modern EVA valves and has separate BASS and TREBLE CONTROLS. The Portable Case will also accommodate almost any make of Autochanger and is attractively finished in Grey Colour Rexine—WE ALSO SUPPLY SEPARATELY:—

(a) The 2-stage (plus Rectifier) AMPLIFIER **£4 2 6**

(b) The PORTABLE CARRYING CASE **£3 17 6**

(c) 6½in. P.M. SPEAKER.... **16 9**

(Carriage and Insurance 4/- extra)

"Hi-Fi" LOUDSPEAKERS

WE HAVE IN STOCK A COMPLETE RANGE BY

GOODMANS—WHARFEDALE—W.B.

ILLUSTRATED AND PRICED LEAFLETS ON REQUEST

THE "ADD-A-DECK"

Incorporating the NEW B.S.R.

"MONARDECK" & MATCHED PRE-AMPLIFIER

Thus providing full tape Recording facilities.

Carriage and Insurance 10/-.

Deposit £3/12/- 12 mths. £1/6/8 **£17.17.0**

Designed to operate through the Pick-up Sockets of the standard RADIO RECEIVER or Small Amplifier which first-class results are obtained. It consists of a Twin Track Tape Deck, incorporating matched Pre-amplifier, and operates at 3¾in./sec. speed. Supplied fully tested and only requires connections to the mains supply and the Pick-up Sockets, for which purposes "floating" leads are incorporated.

H.P. TERMS ARE AVAILABLE ON ALL EQUIPMENT OVER £9. FULLY DESCRIPTIVE LEAFLETS ARE AVAILABLE FOR ALL EQUIPMENT, BUT PLEASE SEND S.A.E.

PRICE REDUCTIONS

(a) The COMPLETE KIT OF PARTS to build both the "5-10" Main Amplifier and the 5-Stage Pre-Amplifier Control Unit..... **£15.15.0**

(b) The "5-10" and the 5-Stage Pre-Amplifier both Assembled and Tested..... **£18.18.0**
H.P. TERMS: Deposit £3/16/- and 12 months of £1/7/8.

(c) The COMPLETE KIT OF PARTS to build the Dual Channel "3-3" Amplifier and the Dual Channel Pre-Amplifier Control Unit..... **£21.10.0**

(d) The Dual Channel "5-10" Amplifier and the Dual Channel Pre-Amplifier Control Unit both Assembled and Tested..... **£25.0.0**
H.P. TERMS: Deposit £5 and 12 months of £1/16/8.

(e) The COMPLETE KIT OF PARTS to build one "5-10" Main Amplifier (Parmeko Transformer) and the Dual Channel Pre-Amplifier Control Unit **£21.10.0**

(f) One "5-10" Amplifier (Parmeko Transformer) and the Dual Channel Pre-Amplifier both Assembled and Tested..... **£25.0.0**
H.P. TERMS: Deposit £5 and 12 months of £1/16/8.

(g) COMPLETE KIT OF PARTS to build Two "5-10" Main Amplifiers (incorporating Parmeko Output Transformers) and the Dual Channel Pre-Amplifier Control Unit..... **£31.0.0**

(h) Two "5-10" Amplifiers (Parmeko Output Transformers) and the Dual Channel Pre-Amplifier Control Unit both Assembled and Tested..... **£36.0.0**
H.P. TERMS: Deposit £7/4/- and 12 months of £2/12/-. Carriage and insurance 7/6 extra.

Prices quoted are subject to £1/6/- extra for Partridge Trans.

MULLARD FOUR CHANNEL MIXING UNIT



Self powered with Cathode follower output. Incorporates Two inputs for CRYSTAL MICRO PHONES, one for CRYSTAL PICKUPS and a Fourth for Radio or Tape.

KIT OF PARTS **£8.8.0** ASSEMBLED AND TESTED **£10.0.0**

Terms: Deposit £2 and 12 months at 15/-.

Model I.L. one microphone input matched for moving coil or ribbon mike £1/17/- extra.

COMPLETE STEREO AMPLIFIER

Meets the many requests for a low priced but good quality Stereophonic Amplifier. Output power is 4 watts. Inputs for Crystal Pick-ups and Radio Tuner.

KIT OF PARTS..... **£8.10.0** or ASSEMBLED..... **£10.10.0**

STEREO DUAL CHANNEL PRE-AMPLIFIER

This model incorporates two 2-valve Pre-Amplifiers (described above) combined into a Single Unit enabling it to be used for both STEREOPHONIC and MONAURAL operation. It is designed primarily to operate with our range of MULLARD MAIN AMPLIFIERS but will also operate equally well with any make of Amplifiers requiring an input of 250 m/v.

Price: COMPLETE KIT OF PARTS **£12.10.0** Alternatively ASSEMBLED and TESTED **£15.0.0**

H.P. Terms on assembled unit: £3 Deposit and 12 months of £1/2/-.

! ! RECORD PLAYERS ! !

The LATEST MODELS are in Stock. Many at REDUCED PRICES ! ! !

Send S.A.E. for ILLUSTRATED LEAFLET



B.S.R. MONARCH UA8 4-spd. Mixer Autochanger with Crystal Pick-up **£6.19.6**

The COLLARO "CONQUEST" 4-spd. Autochanger, Studio "O" Pick up **£7.10.0**

The NEW COLLARO Model RP594, 4 speed Single Record Player, Studio Cartridge **£9.18.9**

The COLLARO 4-speed Single Record Player, incorporating the Studio "O" Pick-up **£6. 9.6**

THE NEW B.S.R. Model UA12 is in stock. A 4-"SPEED" MIXER AUTOCHANGER **£8. 7.6**

UA12 is also available incorporating the B.S.R. STEREO Pick-up, plays L.P. and 78 records. **£10.10.0**

GARRARD RC210 4-speed Autochanger fitted with latest Crystal Pick-up **£10.10.0**

The latest GARRARD TRANSCRIPTION MOTOR "301" **£22.7.3**

The new GARRARD Model 4HF High Quality Single Record Player fitted with the latest T.P.A.12 Pick-up arm and G.C.S.Crystal Cartridge **£18.7.6**

GARRARD Model TA/Mk. II Single Record Player fitted with high output Crystal Pick-up, detachable head **£8.10.0**

HIRE PURCHASE TERMS available on all units £3/19/6 and over

Carriage and insurance on each above 5/- extra.

! ! HOME CONSTRUCTORS ! !

A RANGE OF "EASY TO ASSEMBLE" PREFABRICATED CABINETS

Designed by the W.B. "STENTORIAN" COMPANY for "Hi-Fi" Loudspeaker systems or to accommodate high quality equipment. The acoustically designed Bass Reflex Cabinets containing the very successful "Stentorian" speakers give really first-class reproduction and are well recommended. Models are also available to accommodate high-quality Amplifiers, Pre-amplifier, Tuning Units, Record Players, etc. All models are very easily assembled, in fact only a screwdriver is required.

Fully illustrated leaflets are available, including complete specifications of the various STENTORIAN LOUDSPEAKERS. Please enclose S.A.E.

STERN RADIO LTD. DEPT. W. 109 FLEET ST., LONDON, E.C.4

Telephone: FLEET STREET 5812/3/4

Each Model incorporates the highly successful HF/TR3 Amplifier (described opposite), thus ensuring truly "Hi-Fi" record and playback facilities.

All prices quoted provide for the COMPLETE RECORDER including CRYSTAL MICROPHONE and 1-200ft. Spool of Tape.

There are no "better value for money" Tape Recorders on the market—if you can't call and hear them send S.A.E. for fully descriptive leaflets.

Stern's "fidelity" TAPE RECORDERS

BEFORE YOU BUY—YOU SHOULD HEAR THESE RECORDERS—THEY ARE COMPARABLE TO THE MUCH HIGHER PRICED MODELS

MODEL CR2/S. Incorporates the new Collaro "STUDIO" TWIN TRACK 2-speed Deck **£39.10.0**
H.P. Terms: Deposit £7/18/- and 12 months of £3/17/11.

MODEL CR2/T. Incorporates the very popular 2-speed COLLARO Mk. IV "TRANSCRIPTOR" Deck, which has both upper and lower tape tracks **£47.10.0**
H.P. Terms: Deposit £9/10/- and 12 months of £3/9/8.

MODEL TR2/Mk. VI. Incorporates the New TRUVOX Mk. VI TWIN TRACK 2-speed Tape Deck..... **£49.10.0**
H.P. Terms: Deposit £9/18/- and 12 months of £3/19/7.

TAPE AMPLIFIERS and PREAMPLIFIERS presented from MULLARD DESIGNS

MULLARD TYPE "C" TAPE-PREAMPLIFIER ERASE UNIT

The "Hi-Fi" link to add full tape recording facilities to High Fidelity home installations. Incorporates FERROXCUBE POT CORE PUSH-PULL OSCILLATOR and 3-speed treble equalisation by FERROXCUBE POT CORE INDUCTOR. FOR WEARITE—COLLARO—TRUVOX—BRENELL or MOTEK TAPE DECKS. Includes separate Power Supply Unit.

KIT OF PARTS..... **£14.0.0** or ASSEMBLED..... **£17.0.0**
H.P. £3/8/- Deposit and 12 months at £1/4/11.
(Excluding Power Unit £11/15/- and £14/10/- respectively.)

MODEL HF/TR3 TAPE AMPLIFIER

(Mullard Type "A" design)

A very high quality Amplifier incorporating 3-speed treble equalisation, using the latest FERROXCUBE POT CORE INDUCTOR. FOR COLLARO-TRUVOX-BRENELL WEARITE or MOTEK Tape Decks, has GILBEN Output Transformer. Includes separate Power Supply Unit.

KIT OF PARTS..... **£12.15.0** or ASSEMBLED..... **£16.10.0**
H.P. £3/6/- Deposit and 12 months at £1/4/2

FOR THE HOME CONSTRUCTOR SPECIAL "COMBINED ORDER" PRICES

(a) The COLLARO "STUDIO" TAPE DECK and our Mullard Type "C" PRE-AMPLIFIER and Power Unit assembled and tested **£29.10.0**
H.P. Terms: Deposit £5/18/- and 12 months at £2/3/3.

(b) As above but Type "C" PRE-AMPLIFIER supplied as complete Kit of Parts..... **£26.10.0**

(c) The COLLARO Mk. IV TAPE DECK and the MULLARD Type "C" PRE-AMPLIFIER and Power Unit assembled and tested..... **£35.0.0**
H.P. Deposit £7 and 12 months £2/11/4.

(d) As above but the Type "C" supplied as complete Kit of Parts **£32.0.0**

(e) The TRUVOX Mk. VI TAPE DECK and the assembled Type "C" PRE-AMPLIFIER and Power Unit..... **£40.0.0**
H.P. Deposit £8 and 12 months £2/18/8.

(f) As above but the Type "C" supplied as complete Kit of Parts **£36.10.0**

(g) The BRENELL Mk. V Deck and the assembled Type "C" PRE-AMPLIFIER and Power Unit..... **£46.0.0**
H.P. Deposit £9/4/- and 12 months at £3/7/6.

(h) As above, but the Type "C" supplied as complete Kit of Parts..... **£43.0.0**

(i) The WEARITE 4A DECK with Type "C" assembled and tested **£56.0.0**
H.P. Deposit £11/4/- and 12 monthly £4/2/1.

(Carriage and Insurance on above quotes 10/- extra.)

EACH OF ABOVE CAN BE SUPPLIED IN PORTABLE CASE FOR £5/10/- extra, THUS FORMING A COMPLETE PORTABLE PRE-AMPLIFIER SEND FOR DETAILS.

(a) COMPLETE KIT to build the HF/TR3 Amplifier, together with the COLLARO "STUDIO" DECK **£25.10.0**

(b) As above but HF/TR3 ASSEMBLED and TESTED H.P. TERMS: Deposit £5/16/-, 12 months of £2/2/6. **£29.0.0**

(c) COMPLETE KIT to build the HF/TR3 together with the Mk. IV COLLARO "TRANSCRIPTOR" DECK (£1 extra if we are required to wire up Deck switches.) **£30.15.0**

(d) As above but HF/TR3 ASSEMBLED and TESTED... H.P. Terms: Deposit £7, 12 months at £2/10/5. (£1 extra if we are to wire up Deck Switch Banks.) **£34.10.0**

(e) COMPLETE KIT to build the HF/TR3 together with the NEW TRUVOX Mk. VI TAPE DECK..... **£36.0.0**

(f) As above but HF/TR3 ASSEMBLED and TESTED... H.P. Terms: Deposit £7/18/-, 12 months of £2/17/11. **£39.10.0**

(g) COMPLETE KIT to build the HF/TR3 AMPLIFIER with the BRENELL Mk. V TAPE DECK..... **£41.10.0**

(h) As above but HF/TR3 ASSEMBLED and TESTED... H.P. Terms: Deposit £9, 12 months of £3/6/-. **£45.0.0**

(i) THE ASSEMBLED and TESTED HF/TR3 AMPLIFIER with the WEARITE MODEL 4A DECK, incorporates Wearite Head Lift Transformer, etc **£55.0.0**
H.P. TERMS: Deposit £11, 12 months of £4/0/8.

(Carriage and insurance on each above is 10/- extra.)

Attractive PORTABLE CASE is available to accommodate the TRUVOX or COLLARO TAPE DECKS and we offer it together with ROLA/CELESTION 10 x 6in. LOUDSPEAKER—ACOS CRYSTAL MICROPHONE —and 1,200ft. SPOOL E.M.I. TAPE—ALL FOR..... **£9.10.0**
(Carriage and Insurance 5/- extra.)

OUTSTANDING PRICE REDUCTIONS FOR NEW TAPE EQUIPMENT

WALTERS "Model 404" PORTABLE TAPE RECORDER

A 1960 Model designed to sell for 42 gns.

WE OFFER IT ENTIRELY COMPLETE, including Crystal-Microphone, Tape and Radio/Gram Recording Leads and Plugs. **20 GNS.**
DEPOSIT £4/5/-, 12 months **£1/10/10.** Carriage and insurance 10/-.

EACH ARE BRAND NEW AND CARRY WALTER INSTRUMENT CO'S FULL GUARANTEE.

Twin Track Two Speed Recorder operating at 3¾ and 7½ in./sec. speeds, plays up to size 7in. tape spools and INCORPORATING ... REVOLUTION COUNTER-PAUSE CONTROL —RECORD SAFETY BUTTON (prevents accidental erasure) —MAGIC EYE INDICATOR—EXT. LOUDSPEAKER OUTPUT—TONE CONTROL. Also operates as independent amplifier for direct reproduction from Gram or Radio Tuner.

TRUVOX AT REDUCED PRICES ...

WE ARE ABLE TO OFFER ...

- The highly successful TRUVOX Mk. IV Tape Deck, for..... **£16.10.0**
  H.P. Deposit £3/6/-, 12 months £1/4/3.
- And the associate TRUVOX Type "K" Tape Amplifier, for..... **£15.0.0**
  H.P. Deposit £3/2/-, 12 months £1/2/9.

Alternatively

- A COMBINE ORDER FOR BOTH TAPE DECK and AMPLIFIER for **£30.0.0**
  H.P. Deposit £6. 12 months £2/4/-.
- MATCHING ROLA/CELESTION 10 x 6in. LOUDSPEAKER..... **£1.10.0**

This represents a **TREMENDOUS BARGAIN** ... the retail price of the Mk. IV Deck is £27/6/- and the Type "K" Amplifier is £19/19/-.

EACH ARE BRAND NEW and CARRY MESSRS. TRUVOX'S FULL GUARANTEE.

STERN RADIO LTD. DEPT. W 109 FLEET ST., LONDON, E.C.4
Telephone: FLEET STREET 5812/3/4

FULLY DESCRIPTIVE LEAFLETS ON ALL OF ABOVE ARE AVAILABLE—BUT PLEASE ENCLOSE S.A.E.

HARVERSON SURPLUS CO. LTD.

83 HIGH STREET, MERTON, S.W.19. CHERRYWOOD 3985/6/7

Special Offer

Mullard OC. 76 —10/6.
Matched Pair—£1.0.0
Don't miss this —P. & P. 6d.

MINIATURE AMPLIFIER

Miniature amplifier, size 3½ x 2½ x 4¼ins. Ideal for record player, etc. Controls, volume/on-off, bass and treble. Supplied ready built, less valves (UY85, UF89, UL84), and mains transformer, at the give away price of 14/- P. & P. 2/6.

HARVERSON SUPERHET 4 KIT

A medium and long wave superhet, incorporating two I.F. stages, modern B9 valves (UCH81, UBF89, UCL83, U785), built-in ferrite rod aerial. All you need supplied from theoretical wiring diagram to last nut and bolt (main components ready mounted), including an attractive contemporary styled cream plastic cabinet with gold trimmings. Size 11½ x 4½ x 6½in.

PRICE £6.12.6 Post 3/6.

12 Wire wound Colvern Pots—all different values. 10/6. P. & P. 9d.

THE FAMOUS E.M.I. ANGEL TRANSCRIPTION P.U. (Model 17A)

A Pick-up for the connoisseur originally priced at £17.10.0. The last remaining few offered at £4.10.0 Plus P. & P. 5/-.

500-500 Twin gang condensers with geared slow motion drive. 3/6 each. 36/- per doz. P. & P. 6d.

A few only—Transistor record player cases in light grey cloth—complete with motor board. Size—12" x 8" x 6"—18/6 each. P. & P. 1/9.

EXTENSION SPEAKER

An attractive cabinet 8 x 6 x 2in. fitted with 3 ohm 5in. speaker complete with lead, a few only.

19/6 P. & P. 2/6.

This Month's Bargain

Complete and ready for your cabinet, 4 valve superhet chassis, complete with valves, ferrite aerial, dial and knobs. Valve line-up—UCH81; UBF89; UCL83; UY85. L and M wave. Price £4/19/6. P. & P. 3/6.

MIDGET GRAM AMPLIFIER READY-BUILT with Speaker

A 2½ watt gram amplifier fitted with bass, treble, and vol./on-off controls. Supplied complete with 6 x 4in. 3Ω speaker, valves (UY85, UF89, UL84), knobs, etc., all mounted on an attractive baffle board, size 10½ x 7½ins.

OUR PRICE ONLY 49/- P. & P. 3/-.

SPEAKER FRET

Super quality heavily woven fret. 54 inches wide. Usual price 50/- per yard. P. & P. 1/-.
OUR PRICE, 19/- per yard

MIDGET I.F. TRANS & COILS

A pair of midget 465 kc/s. I.F. transformers, plus LW and MW coils.
OUR PRICE 10/- per set. P. & P. 1/9.

TRANSISTOR BARGAINS

ALL MULLARD FIRST GRADE

OC71	8/-
OC72	12/-
OC72 Matched Pair	25/-
OC45 Green Spot	15/-
OC45 Blue Spot	15/-
OC44	15/6
SB305 Semi Conductor	10/6
QA41 Diode	3/6

Postage on all the above 6d.

RECORD CHANGERS

GARRARD	RC 98 Mk. 4H. 4-speed autochange		£16.10.0
	RC 120/D Mk. 2	" "	£9. 0. 0
	RC 120 Mk. 4D	" "	£9. 0. 0
	RC 120 Mk. 4H	" "	£9. 0. 0
	RC 121 Mk. 1	" "	£11.0. 6
	RC 121 Mk. 4H	" "	£11.0. 6
	RC 121/40 Mk. 2	" "	£11.0. 6
COLLARO	RC 54 4-speed autochanger	...	£6.19. 6
	RC 594 " "	...	£7.19. 6
	Conquest " "	...	£6.12. 6
	Challenger " "	...	£7.19. 6
B.S.R.	Monarch UA8 4-speed autochange		£6.19. 6
	TU4-speed single player less pick-up		£2.10. 0

Carriage and ins. on each of above 5/- extra.

NOTE: Any of the above with Stereo Cartridge and Fittings, 16/- extra.

TAPE DECKS

B.S.R. MONODECK, 3¾in. per sec. simple control, 5¾in. spools. £7.10.0

plus 5/6 carriage and Insurance (Tapes extra)

TRUVOX MK. III DECK. push button controls, 3 shaded pole A.C. motors, up to 7 inch reels..... £10.6.6
plus 6/- carriage and insurance.

MONAURAL AMPLIFIER

This amplifier made by a leading manufacturer. Mullard valves—ECC83, EL84 x EL84, EZ80. Bass, Treble and Volume on remote panel. Elegant Knobs. OUR PRICE one month only £4.16.6 plus P. & P. 3/6.

RECTIFIERS FOR BATTERY CHARGERS

12 v. 1 amp.	4/3	12 v. 4 amp.	12/6
12 v. 2 amp.	7/-	12 v. 5 amp.	14/6
12 v. 3 amp.	10/-	P. & P. 6d.	

PICK-UP CARTRIDGE BARGAINS

STUDIO P	17/6
ACOS HIGH G	17/6
E.V. POWER POINT ...	12/6
RONETTE.....	18/6
G.C.Z.....	16/6

P. & P. 1/-.

CYLDON 12 CHANNEL TURRET TUNERS

New purchase offered at still lower price. I.F. 33-38 Mc/s. Complete with PCC84 and PCF80 valves and 8 sets of Coils for 5 Band I channels and 8, 9, 10 Band III. New and unused. Value over £7
OUR PRICE, Post paid. 32/6

COSSOR C.R.T. SNIP

10BK 10-inch. New and boxed, 15/-, plus 6/- P. & P.
7SK 10-inch. New and boxed. 15/-, plus 6/- P. & P.

ION TRAP MAGNETS

To suit the above, 2/9 each. P. & P. 3d.

CONDENSER / RESISTOR PARCEL

50 mixed P.F. Condensers and 50 mixed Resistors. An assortment of useful values. All popular sizes—all new—a must for the serviceman and constructor. ONLY 10/-. P. & P. 1/-.

GUARANTEED VALVES ★ NEW and BOXED ★ PROMPT DISPATCH ★ POST 6d. per Valve extra ★

ATP4	3/3	EB34	1/9	ECL82	9/9	EY51	9/3	KTZ41	3/3	PY80	7/-	U50	7/6	UL41	9/6	1C5GT	11/9	384	7/-	6AQ5	7/-	6D6	4/6	6K7M	6/3
AZ1	9/3	EB41	8/-	EF41	9/3	EY86	9/3	N37	10/6	PY81	8/-	U76	7/6	UL44	25/-	1D5	11/9	3V4	8/-	6AT6	8/-	6CH6	9/9	6K8G	7/-
AZ31	11/3	EBC33	6/3	EF42	10/3	EZ40	7/-	N78	12/6	PY82	6/6	U801	29/-	UL46	25/-	1D6	11/9	5R4GY	9/-	6AU6	9/9	6F6G	7/-	6K8GT	6/6
B36	14/-	EBC41	8/9	EF50	3/9	EZ80	6/6	N339	29/-	PY83	8/-	UABC80	9/6	UL84	8/6	1H5GT	10/-	5U4G	6/3	6B8G	3/9	6F6M	7/-	6K7GT	5/6
CBL31	22/9	EBF80	9/-	EF80	7/-	EZ81	6/6	QZ4	5/-	PZ30	15/6	UAF42	8/9	UU6	18/6	1L4	6/-	5V4	10/9	6BA6	7/-	6F1	13/-	6K8GT	9/9
CCH35	22/9	EBF89	9/-	EF85	7/-	EZ90	7/-	P61	8/3	PEN45DD		UBC41	8/6	UU8	25/-	1L5D6	8/-	5Y3G	7/6	6BE6	7/6	6F15	13/-	6K8G	13/6
CL4	11/9	ECC81	7/6	EF86	11/6	GZ32	11/-	PCC84	8/6		25/-	UBF80	8/9	UY1N	11/9	1N5	9/9	5Y3GT	7/6	6BG6G	22/-	6F15	13/-	6L1	14/6
CL33	15/-	ECC82	7/-	EF89	8/-	KT32	9/3	PCF80	9/-	SP41	3/9	UCC84	10/-	UY21	11/9	1R5	7/-	5Z4G	8/6	6BH6	8/6	6F17	11/9	6L6G	7/6
CY31	15/9	ECC83	8/6	EF91	8/6	KT33C	8/-	PCF82	11/9	SP61	2/9	UCC85	10/6	UY41	7/-	1S4	9/9	5Z4M	9/6	6BJ6	9/6	6F33	16/6	6L6M	9/-
DAF96	8/3	ECC84	9/3	EL33	24/6	KT36	28/-	PCL82	11/6	SP42	9/9	UCF80	15/6	UY85	6/6	1S5	6/-	6A7	10/6	6BZ7	11/9	6H6	2/3	6L7G	7/-
DF96	8/6	ECC85	8/-	EL41	9/6	KT61	10/3	PCL83	13/6	SP42T	9/9	UCH42	9/9	VP41	8/-	1T4	5/6	6A8G	8/6	6BW6	9/6	6H6GT	2/3	6L18	10/3
DH63	11/6	ECF80	11/3	EL42	9/6	KT81	9/9	PL36	16/6	T41	22/-	UCH81	9/9	VP133	14/-	2X2	4/-	6AC7	6/-	6BW7	8/-	6J5GT	4/6	6L19	14/-
DK96	8/6	ECF82	12/3	EL81	15/6	KT63	7/-	PL38	14/6	U22	7/6	UCL82	15/6	X22	18/9	3A4	6/6	6AG5	5/3	6C4	3/9	6J5M	6/-	6N7GT	7/-
DL96	8/6	ECH21	22/-	EL84	8/6	KT66	16/-	PL81	11/9	U25	12/-	UCL83	11/6	1A3	3/-	3A8GT	5/6	6AK5	6/-	6C9GT	6/-	6J6	5/6	6P28	25/-
EA50	1/3	ECH42	9/-	EM84	8/9	KT81	21/-	PL82	8/-	U26	11/9	UF41	8/6	1A5GT	5/6	3D6	4/6	6AL5	6/-	6C9	4/6	6J7G	6/-	6Q7G	7/-
EABC80	8/6	ECH81	8/6	EM80	9/3	KTW61	6/-	PL83	11/-	U37	25/-	UF85	8/6	1A7GT	11/9	3Q4	7/6	6AM5	11/9	6C31	7/-	6J7M	8/6	6Q7GT	9/-
EA76	9/6	ECL80	9/3	EM81	9/6	KTW63	7/-	PX25	11/9	U45	14/-	UF89	8/6	1C2	11/-	3Q5GT	9/-	6AM6	4/6	6CD6G	22/-	6K7G	3/9	6SA7GT	7/6

YOU ARE INVITED!

Spend a day browsing around our premises at
83 HIGH ST., MERTON, S.W.19
(one minute South Wimbledon Tube)

We have a wealth of components, valves, chassis, tape decks autochangers, amplifiers, F.M. tuners, record players, tape recorders, cabinets, and a whole host of other things we just don't have the space to describe. Please come and look for yourself. We will be pleased to see you, and there's no obligation to buy.

STEREO AMPLIFIER

Complete with 2 Loudspeakers

A compact amplifier combining latest features with good reproduction, and ample volume. Complete with valves (ECL82, ECL82, EZ80), panel, knobs, etc. and 2 matched 3Ω loudspeakers, Few only—Order Now. Plus 4/6 P. & P. £5.10.0

ANNOUNCING . . .

THE OFFER OF THE YEAR!

HARVERSON'S SUPER STEREO KIT

The product of a world-renowned manufacturer, this stereo amplifier is composed of a number of compact " ready-built " units, only requiring interconnection. This system has the big advantage of being easily adaptable to fit any cabinet. Each unit is extremely well made from first-grade components, and all valves employed (ECL82, EZ80 range) are genuine Mullard. The comprehensive instructions supplied with each kit make the simple interconnection of units easy even for the novice.

THE KIT COMPRISES . . .

TWO MIDGET AMPLIFIERS each capable of 3W output. The reproduction is good, enabling you to get the best from both your stereo or monaural recordings. Both amplifiers are complete with well-designed output transformers providing perfect matching to standard 3-7Ω loudspeakers, and have remote bass, treble and volume controls. Size 5in. x 2¼in. x 3in. high (each amplifier).

CONTROL UNIT, this is a flying panel fitted with three 2-gang potentiometers, enabling the bass, treble and volume controls of each amplifier to be positioned in the most convenient place in your layout. These dual controls are equipped with attractive cream and gold knobs and an escutcheon is provided for the complete panel.

SEPARATE POWER PACK complete with valve rectifier, although of midget size (5in. x 2in. x 3¼in. high), provides power for complete amplifier equipment.

ISOLATED MAINS TRANSFORMER of robust construction is a separate unit and may be mounted independently.

VOLTAGE SELECTION PANEL. Consisting of a panel fitted with the " valve base " type of mains input selector and a channel output socket.

ONE LOUDSPEAKER, a good quality 5-inch speaker, specially selected for this equipment. (**Note:** The second speaker may be purchased from us for an additional 14/6.)

CREAM DOUBLE PUSH BUTTON SWITCH of attractive design gives positive on/off switching action.

INDICATOR LIGHT. This pilot light provides visual indication that the equipment is operating, and is complete with an attractive gold-finished escutcheon.

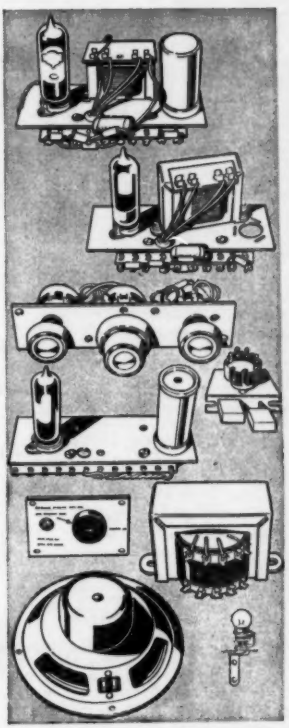

This kit, which is complete in every way, is exclusive to HARVERSON'S, who are proud to present it at the amazing price of **59/6**

PLUS 6/6 POST, PACKING & INSURANCE

FOR MORE **BARGAINS** SEE OUR OTHER ADVERTISEMENT

HARVERSON SURPLUS CO. LTD.

83 HIGH STREET, MERTON, S.W.19 CHErrywood 3985/6/7

BRAND NEW AM/FM (V.H.F.) CHASSIS AT £13.6.8. (P. & P. 10/-)

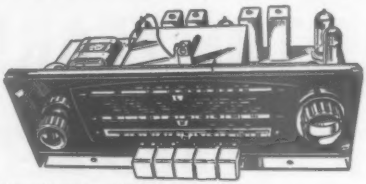

Tapped input 220-225 v. and 236-250 v. A.C. ONLY.
Chassis size 15 × 6⅞ × 5½in. high. New manufacture. Dial 14½ × 4in. in gold and black. Pick-up Extension speaker, Ac., E., and Dipole sockets. Five "piano" push buttons - OFF, L.W., M.W., F.M. and Gram. Aligned and tested.
With all valves & O.P. Transformer, Tone-control fitted.
Covers 1,000-1,900 M., 200-500 M.; 88-99 Mc/s.
Valves EZ80 rect., ECH81, EF89, EABC80, EL84, ECC85. Speaker and Cabinet to fit chassis, 47/6.
10 × 6in. ELLIPTICAL SPEAKER, 20/- to purchasers of this chassis.
TERMS:—(Chassis £5/7/6 down, inc. carr.,—and 6 Monthly Payments of 20/-, or with Cabinet and Speaker £5/10/- down and 7 monthly Payments of 20/-. Some tarnished but fully working unused chassis at £10 (10/- carr.).

3-VALVE AMPLIFIER (INCL. RECT.)
Capable of giving 4 watts. Mains and output transformer. Valves ECC83, EL84, EZ80 3 Controls, volume, bass and treble. On/Off switch. Fully guaranteed. Chassis size 6½ × 3 × 2¼in.; with 7 × 4in. elliptical speaker or 6½in. round (Goodmans); state which.
ONLY 67/-. (3/- P. & P.).

STUPENDOUS OFFER! 13-CHANNEL TUNER
I.F. 34-38 Mc/s. complete with valves PCF80 and PCC84. Removed from chassis but in working order.
15/- (3/6 P. & P.) Knobs 2/6 extra. Some tuners less valve 7/6.

50 SILVERED MICA AND CERAMIC CONDENSERS, 10/-. 50 RESISTORS 5/-. ALL NEW
NEW WAXED TUBULARS, 350 v. or above, 3 of each. .001, .002, .005, .01, .02, .03, .1mF. .25, .5mF. Total 21 for 4/6. (post 9d.) Not more than 3 of one type.

NEW ITA AND BBC TUNER
By well-known manufacturer for superhet TVs with 35-35 Mc/s. I.F. For all areas; covers all 13 channels. Switch gives BBC and two ITA selections. Suits G.E.C. sets ET46-53, 4544 5146, 5147, 5543, 5642 and 6641 without alteration. Easily adapted as aerial convertor, and instructions can be provided free. Has ITA and BBC co-axial sockets and separate gain controls.
WITH VALVES PCF80 and PCC84, 29/6 (P. & P. 3/-).
Some without valves at only 12/6 (P. & P. 3/-).

GRAMOPHONE AMPLIFIER
with 5in. SPEAKER. On Fabric-covered Baffle 12½ × 5in. Mains and Output Transformers. EZ40 and EL41 Valves. Tone and Volume Controls. On/Off switch. Plenty of Volume. Fully Guaranteed. Two Knobs supplied. Ready to play. Useful for Stereo. ONLY 57/-, post 3/-.

ALTERNATIVE SIZE 12½" x 6".

PUSH-PULL AMPLIFIER £4/15/-
3/- P. & P.
Brand new 200-240 A.C. mains. Bass, treble and vol. controls flying panel. With valves EZ80, ECC83 and 2-EL84 giving full 8 w. Chassis 13 × 3½ × 3½in. With o.p. trans. for 2-3 ohm speaker.



A Quality Tape Recorder. Valves EZ80, ECC83, ECL82, DM70 Record Level Indicator, Acos Crystal Mike. 5501t. Emitape. Extra spool. 3½in. rec. B.S.R. Monarch deck (1) Vol. (2) On/Off Tone. (3) Ext. L.S. (4) Monitor. (5) Radio Input. (6) Mike input. Fast forward and reverse controls. Cabinet size 14 × 11½ x 7in. Today's Best Value at £18 (10/- P. & P.). Low Interest Terms: £4 down and 5 monthly payments of £3. Write for descriptive leaflet. Terms include carr.



LISTEN WITHOUT INTERFERENCE
Fully built V.H.F./F.M. Set. Mullard permeability tuner. 88-95 Mc/s. Metal (Blue and grey) cabinet 12 x 7½ x 6in. ONLY £3/8/- (4/- carr.). Cheap room dipole 10/-, 300 ohm twin feeder, 6d. yd. With 12 months' guarantee.
Valves ECC85, 2-EF91, ECL82 & 2 diodes.

Delivery by return. C.O.D. 2/- extra. Terms: Cash with order or one-third down and balance plus 7/6 (up to 47/10/-) in equal four monthly payments. Balance over 47/10/- add 1/- in £1 and pay in not more than 6 monthly payments. See special terms for A.M.-F.M. chassis. All new goods unless stated. Send 6d. for 20-page catalogue. SATISFACTION GUARANTEED, Posted orders to Camberley.

GLADSTONE RADIO 58A HIGH ST., CAMBERLEY, SURREY. Tel. 22791
56 Stokes Croft, Bristol. (Camberley closed Sat.)
247, New Road, Copnor, Portsmouth, Hants.
(Portsmouth and Bristol closed Wednesday)

BENSON'S BETTER BARGAINS

POWER PACK. Input 110/240 v. Outputs: 330 v., 120 mA. D.C. and 6.3 v. x 2 A.C. Potted trans. and choke, **30/-** (post 3/6). **MORSE KEY** with buzzer, on board, wired for 4½ v. battery, **2/6** (p.p. 1/6). Keys, morse, covered, with plug, **4/6**; large **7/6**. **TELE "P"** intercom. sets, good condition, pair **65/-**, post free Gt. B. **METERS** (10Q/4) with two centre-zero movements, 600 and 400 μA, **9/6**. **TRANSFORMERS.** Open, upright, input 200/250 v. Outputs: 250-0-250 v., 150 mA., 5 v. 3 A. and 6.3 v. 5 A., **25/-**. Input 110/230 v. Outputs: 6 v., 2 A. twice, shrouded, **10/6**. 1,860 v. 4 mA., **12/6**. Potted, "C" core; Input 230 v. Outputs: 6.3 v., 0.3 A. (1A. actual), twice, **8/6**; Outputs: 510-0-510 v. 275 mA., 375-0-375 v. 83 mA., 5 v. 3 A., 6.3 v. 7 times (17 A.), **45/-**. **CONDENSERS**, block, paper, 8 mfd. 250 Vw, **4/-**; 600 Vw. **6/-**; 4 mfd. 2 kWV. **7/6**; 600 Vw. **5/6**. **SWITCH** fuse splitter, DP 15 A., **15/-**. **MONITOR 56**, triggered oscilloscope, comprising **Indicator 546** and **Power Unit 675**, 230 v. A.C. input, with cables and circuit. Cathode probe unit extra, **17/6**. **£8/10/-** (Rail 15/-). **HEADPHONES**, CLR, **7/6**. **GR100** Noise Limiter assembles with valve, **3/6**. **NEW M.C. METERS**, 3½in. round flush, 50μA, **70/-**; 200 μA centre zero, **50/-**; 1 mA., centre zero, **45/-**; 1 mA., **55/-**; 2½in. 1 mA., **22/6**; 100 mA., **8/6**; 2in. 300 mA., each **8/6**; 2½in. M.I. 20 v. A.C., **8/6**; 300 v. A.C. 2½in., **15/-**; 100 v. A.C., 3½in., **45/-**; 140 v. A.C., M.I., 6in., in case, **45/-**. **VIBRATORS**, Mallory G634C 12 v. 4-pin, **7/6**; 6 v. 5-pin reversible, **7/6**. **R1155B**, good condition, tested, with handbook, **£8** (Rail 10/-). **DRIVES:** slow-motion Admiralty 200:1 ratio, scaled 0-100, **5/6**. **R1155 S.M.** "N" type, new, **10/6**. **VIBRAPAK**, 6 v. D.C. to 250 v. 60 mA., smoothed, case, **22/6** (p.p 3/6). 12 v. input, **25/-**. **DYNAMOTORS** (post 3/6). 12 v. to 230 v. 60 mA., **11/6**; 6 v. to 250 v. 60 mA , **11/6**. **CHOKES.** LF 10 H, 200 mA., **9/6**; 100H, 60 mA. **8/6**; 9H, 100 mA., **5/6**; Potted 10H, 100 mA., **7/6**; "C" 10 H., 250 mA., **12/6**; 5H, 400 mA., **10/6**. **R.F.27**, good cond., **18/-** (p.p 3/6). **RELAYS**, co-axial, small, 12/24 v., **7/6**. **SWITCHES:** Wafer: 2 pole, 4 way, 4 bank, 1P6W6B, 4P2W2B, 1P7W3B, 1P11W2B, 4P2W5B, **3/6** each. Ceramic 2P4W1B 1P5W3B, 1P11W, 3P3W2B, **3/6**. STUD, 1P24W2B, 1P8W2B, **3/6**; 1P10W2B, **5/6**; 1P40W3B in brass case, **12/6**. **VALVES:** QQ406/40(5894), **40/-**; QQV04/20(815), **30/-**; 6BM6 **60/-**; VLS389 **20/-**; VLS631 **10/-**. **BENDIX MN26C** M/L bands, **70/-** (carr. 10/-). **Rx78** 2.4-13 mcs. with 100 kcs. Xtal, **35/-** (p.p. 3/6). Box with 6 GPO keyswitches and 12 lampholders, **15/-** (p.p. 3/6).

LIST AND ENQUIRIES S.A.E. please. Terms, C.W.O. **Postage extra.** Immediate despatch.

Callers and post: **W. A. BENSON (W.W.), 138 Rathbone Road, Liverpool, 13.** *SEF* 6858.

Callers: **SUPERADIO (Whitechapel), Ltd., 116 Whitechapel, Liverpool, 1.** *ROY* 1130.

STABILIZE YOUR AC MAINS with the finest equipment, *at a fraction of the normal cost:—*

FERRANTI 7½-KVA MOVING COIL AUTOMATIC VOLTAGE REGULATORS

Any stabilized output voltage in the range 200-250 v. can be selected by plug-board tappings. The selected output voltage is automatically maintained constant within ±½%, at all loads 0 to 30/37½ amps., when the supply voltage is varying over the range +8% to −12%.

- Frequency compensated 45-55 and 54-66 c/s.
- Excellent output wave-form.
- Can also be used as a variable transformer.
- **Unused.** Complete with spares and instruction book.

P. B. CRAWSHAY
94 Pixmore Way, Letchworth, Herts. 'Phone 1851

TRANSISTORISED POWER AMPLIFIERS

PORTABLE, MOBILE, MAINS

FOR ALL RADIO, AMPLIFIER & SOUND INSTALLATIONS

ENQUIRIES:—

Audix
STANSTED, ESSEX. *STANSTED 3132*

PRECISION WIDE RANGE SIGNAL GENERATOR

MODEL SWO-300 150 Kc/s-300 Mc/s



The Model SWO-300 is an outstanding instrument specially designed to cover the wide frequency range from 150 kc/s-300 Mc/s, which covers all the requirements of equipment in general use.

SPECIFICATION :—

- FREQUENCY RANGE: 150 kc/s-150 Mc/s on fundamentals (6 bands). 150 Mc/s-300 Mc/s on harmonics.
- CALIBRATION ACCURACY: within ±1 per cent.
- MODULATION: Internal and external.
- ATTENUATION: To —40 db.
- OUTPUT: Facilities for high and low.
- POWER SUPPLY: Internal 230 v. A.C.
- ACCESSORIES: Test leads and instruction manual.

ONLY
£14.19.6
P. & P. 5/6
FULLY GUARANTEED

Size: 7" x 10" x 5"



V.H.F. COMMUNICATION RECEIVER 1392

15 VALVE SUPERHET

Frequency Range 95-150 mc/s. (2 to 3 meters)

Gives reception of Police, Aircraft and Amateur transmissions.
Valve line up: 1st and 2nd R.F. Amp. VR.136 (EF.54), 1st Local Oscillator; VR.65 (SP.61), 2 Oscillator Multipliers; VR.136 (EF.54); 3 I.F. Amp.; VR.53 (EF.39); A.G.C. 6Q7; Output 6J5; Muting VR.92 (EA.50); Noise Limiter VR.92 (EA.50); B.F.O. 6J7; Mixer VR.136 (EF.54); Det Mod. 6Q7. Slow motion tuning, normally crystal controlled, or tunable over 95–150 Mc/s. Power supply required: 240–250 volts at 80 mA., 6.3 volts at 4 amps. Size 19in. x 10in. x 10in. Standard Rack Mounting.

ONLY
£6.5.0
CARRIAGE 15/-

COMMAND TRANSMITTERS

3-4 Mc/s. 45/-
4-5.3 Mc/s. 45/-
5.3-7 Mc/s. 45/-

COMMAND RECEIVERS

6-9.1 Mc/s. 60/-
Post & Packing 3/6 each

AMERICAN LIGHTWEIGHT HEAD SET

They're High and Low Impedance!

These H.S.30 phones are the smallest used by U.S. Air Force. 250Ω imp. using soft rubber miniature ear moulds for maximum music and voice reproduction of the finest quality. Supplied free is a small transformer unit with cord and plug which steps impedance up to 4,000Ω.

ONLY 15/-
P. & P. 2/6



R.F. UNITS

Undoubtedly the most useful Govt. surplus units ever released. The R.F. units will extend the frequency range of your receiver to enable you to receive, amateur, TV and VHF stations.

R.F.24. 20-30 Mc/s. Switched tuning..... 22/6
R.F.25. 40-50 Mc/s. Switched tuning 8/6
R.F.27. 65-85 Mc/s. Variable tuning 29/6
Circuits supplied. P. & P. 3/6 on each.

PERSONAL EARPHONE

A really sensitive dynamic earphone of exceptionally fine quality. Provides clear reproduction of music as well as speech. Fully Guaranteed and complete with ear insert, 3 feet cord, sub-miniature plug and socket.
Model CR.5 Crystal Earpiece, high imp., 12/6. Post 1/-.
Model MR-4 Magnetic Earpiece, low imp. 10/6. Post 1/-.

R.C.A. COMMUNICATION RECEIVER AR-88D

Undoubtedly the finest communication receiver ever produced for service and laboratory use. Now Relda's exclusive purchase enables you to obtain this Rolls-Royce of communication receivers at the lowest price ever offered.

SPECIFICATION:
Range: 540 kc/s to 32 Mc/s in 6 bands.
Power Supply: 110/260 v. A.C.
Power Output: 2.5 W into 2.5 or 600 ohm line or H.I. Headphones.
Sensitivity: From 15 to 2.5 μv per 500 mW.
Image Ratio: From 1,000,000 at 60 kc/s to 200 at 28 Mc/s.
Circuit: Two R.F. stages (6SG7); Oscillator (6J5); Frequency Changer (6SA7); Three I.F. stages (6SJ7); A.V.C./Detector (6H6); Noise Limiter (6H6); Audio Amplifier (6SJ7); Power Output (6K6); B.F.O. (6J5); Voltage Regulator (VR-150); Rectifier (5Y3); I.F. —455 kc/s.
Size: 19½ x 11 x 19½in.

PRICE FULLY GUARANTEED ONLY
£39.10.0
Carriage 50/-.

Model AR-88 L.F. 73–550 kc/s and 1.48–30.5 Mc/s. **ONLY £37/10/-.** Carriage 50/-.

OSCILLOSCOPE

MODEL 74

This basic scope represents one of the finest buys we have ever made. Contains Brilliance, Focus, Gain and 2-speed time base controls. Separate X plate terminals. Signal generator modulated at 2 freqs. over 150–255 Mc/s. Complete with 12 valves, VCR 139A tube, internal A.C. power pack and complete circuit and technical details.

ONLY 97'6 Carr. 12/6

VARIABLE TRANSFORMERS



● Input Voltage 230 v. continuously variable output from 0–260 v. ● GOOD REGULATION. Output voltage is substantially independent of load. ● SMOOTH CONTROL. Can be set closely to any output voltage within its range. ● HIGH EFFICIENCY. Very low losses under all load conditions. ● LONG LIFE. The same as that of any standard fixed-ratio power transformer when operated at rated loads. ● SMALL SIZE. Smaller than any other type of control of equal power rating. ● LINEAR OUTPUT VOLTAGE. Continuously adjustable from zero to 30% above line voltage by a 320-degree rotation of the knob. The dial is calibrated to read directly in output voltage at rated line voltage. ● DIRECT-READING DIALS. All models are supplied with reversible direct-reading dials. Large white figures, easy to read at a distance. ● MODERATE TEMPERATURE RISE. Less than 50 degrees C. for continuous use. ● ADVANCED MECHANICAL DESIGN. Rugged construction—no delicate parts—protected with a strong, iron cover.
ALL FULLY GUARANTEED. DELIVERY EX-STOCK.

MODEL B.10
Current rating 10 amps.
£18.5.0

MODEL B.20
Current rating 20 amps.
£32.10.0

Relda Radio Ltd.

Callers: **87 TOTTENHAM COURT ROAD, LONDON, W.1**
Mail Orders: **(DEPT. W.) 32a COPTIC ST., LONDON, W.C.1. MUS. 9606**

Shop at RELDA for EVERYTHING IN ELECTRONICS

FOR BARGAINS

M.S. RADIOPOST CO.

MAIL ORDER SPECIALISTS

Please quote Dept. M.O.W.W.

36 WINCANTON RD., HAROLD HILL, ROMFORD

AMERICAN SEALED RELAYS. Brand new and in maker's original packings. Type A. SIGMA Type SRJ-761 SPTD. 5,000 ohms. Solder lug connections. Size: 2¼ x 1½ x 1¼in. 22/6 each. Type B. HUGHES Pt. No. ME-5002. DPDT. 10,000 ohms. Solder lug connections. Size: 2 x 1½ x 1¼in. 21/-. Type C. R.C.A. MHX-110, 250 ohms. 4 pole DT. 1½ x 1in. dia. 26.5 v. D.C. 10/6. R.C.A. MHX-84. 300 ohms. 4 pole D.T. 1½ x 1in. dia. 26.5 v. D.C. 10/6 each. COMAR C-519. 400 ohms. 26.5 v. D.C. SPDT. 3 amps. Size: 2 x 1½ x 1¼in. Solder lug connections. 15/- each.

SENSITIVE RELAY: Miniature type. 250 ohms. D.P.D.T. 12 v. D.C. 2 oz. Overall size 1 x 1½ x 1in. Has adjustable armature tension spring. Will operate on less than 1 m/a. Suitable for all model radio control. **Brand New. 15/6 each.**

MINIATURE ROTARY TRANSFORMER: H.T. 11 watts. 11 volts input, 310 volts 30 m.a. Output: will give approx. 120 volts at 30 m.a. from a 6v. input. 4in. long x 2in. dia. Weight 1¼lb. Current consumption under load approx. 2 amps. 17/6 each.

ROTARY TRANSFORMERS TYPE HT.31.



Input: 11.5 volt. Output: 250 volt at 120 mA. Type HT.32 Input : 11.5 volt. Output: 490 volt at 65 mA. HT.31. Ex-Units but tested, 35/- ea. HT.32. New, in cartons, 20/- ea.

HYSTERESIS MOTORS. By Smith's Aircraft Instruments. Type: HM2/1/D. Drag Cup. 2 volt 400 cycles. 40/- each. New. Type HM/14/1. 115 volt 400 cycles. 50/- each. New. Type: HM/12/10. 115 volt 400 cycles. 50/- each. New.

8 FOOT WHIP AERIALS. Supplied in 2 sections. No. 1 and 2. ZA/26800 and 26286. Each section collapsible down to 1ft., with retaining wire through each section. Ideal also for Radio Control, fishing rod or pennant mast. 7/6 complete. New.

MINIATURE DYNAMIC SPEAKERS

A must for all build-it-yourself hams. As supplied with all current transistor kits. Can also be adapted for home phones or inter. com. 2in. diameter, resistance 70 ohms. **ONLY 5/- each.** New and unused.

CAMERA MOTORS :

Fractional horse power. 24 volts. Beautifully constructed throughout and fully governed. Ratio 2½ to 1. Size 3 x 1½ x 1¼in. Brand new and in new original sealed cartons. ONLY 12/6 each.

PLESSEY E.H.T. CONCENTRIC CONNECTORS



Types available. Plugs: CZ 64662/64658/64646. Sockets: CZ 64647/64659/64661. New and unused. For Radar Stations, TV Link-ups and Atomic research applications. 8/6 pair or 5/- each

OPERATORS or INSPECTION LAMPS

Type No. 6A. ZA 12645. Takes M.E.S. bulb. Ideal for Aircraft, Car dash, Map or T/X inspection. 3/9 each. **New and unused.**

HEADPHONES, LOW RESISTANCE Sound power type DLR5, complete with low level dynamic throat microphone. Suitable for crystal sets etc. **Brand new** and cartoned. 8/6 pair.

DRAYTON COMPACT CAPACITOR START AND RUN MOTOR. Type RQG. Beautifully constructed to stringent Ministry spec. Fully reversible, and made to operate on 200/250 v. A.C. 50 cycles. 1.75in. oz. torque at 2,250 r.p.m. Condenser req. : ·5 mfd. 350 v. D.C. Size: 2¾in. dia., 2¼ in. wth., ¼in. x ¼in. spindle. **Only 35/-.**



TERMS: C.W.O. or 7 days approved accounts. **All our goods are guaranteed new or in working order. Money refunded in full if not absolutely satisfied. Orders despatched same day. No postal or packing charges.**
(C.O.D 1/9 extra. Carriage extra Ireland and countries outside U.K.)

AUTOMATIC CONTINUITY & INSULATOR TESTER (A.C.I.T.)

for the FASTEST -EVER TESTING OF MULTI-CORE CABLES

Example of testing speed 25 pt cable tested:—
625 insulation tests, 25 leakage to screen, 25 continuity tests—all in 25 seconds.
Insulation faults are shown and faulty circuits indicated by lamps. Cross connected circuit leakage to screen are discovered also involved circuits indicated.
Continuity tests are carried out with low voltage, insulation tests 500 v. A.C.I.T. stops automatically after discovering any fault or when the test is finished.
Brass type Plessey Mk. IV sockets and plugs are used, also an aluminium version Mk. IV is available if required.
A.C.I.T. is built for 25, 50 or to order for more circuits.
Fully descriptive leaflet on request.

P.G.A. RADIO, BEAVOR LANE, HAMMERSMITH, LONDON, W.6.
Riverside 8006

KNOBS

BETTER STYLES **BETTER RANGE**

SUPPLIERS OF MOULDED CONTROL KNOBS, TERMINALS, ETC. OVER SIXTY STOCK PATTERNS. ENGRAVING TO INDIVIDUAL REQUIREMENTS

UNCLES BLISS & CO., LTD.
CHERRY ORCHARD RD, EAST CROYDON, SURREY
TELEPHONE: CROYDON 3379/6390

PARKERS SHEET METAL FOLDING MACHINE HEAVY VICE MODELS



Carr. free

With Bevelled Former Bars

No. 1. Capacity 18 gauge mild steel x 36in. wide	**£7**	**10** **0**
No. 2. Capacity 18 gauge mild steel x 24in. wide	**£5**	**5** **0**
No. 3. Capacity 16 gauge mild steel x 18in. wide	**£5**	**5** **0**

End folding attachments for Radio Chassis, Tray and Box Making...for 36in. model, 3/6 per ft. Other models 2/-. The two smaller models will form flanges. As supplied to Government Departments, Universities, Hospitals. One year's guarantee. Money refunded if not satisfied. Send for details.
A. B. PARKER, Wheatcroft Works, Wellington Street, Batley, Yorks. Tel. 426.

Wilkinsons EST. 1921

RELAYS P.O. TYPE 3000

Built to your own specification
Keen Prices
Quick Delivery
Contacts up to 8-Changeover

MINIATURE RELAYS:

Siemens High Speed Sealed			S.T.C. and G.E.C. Sealed.			
2.2Ω+2.2Ω	H96A	18/6	2Ω	2 C.O.	4184GA	18/6
145Ω+145Ω	H96C	19/6	700Ω	2 C.O.	4184GD	19/6
500Ω+500Ω	H96D	22/6	2500Ω	1 make HD	4186EE	22/6
1700Ω+1700Ω	H96E	25/-	2700Ω	2 C.O.	4184GE	21/6
Siemens High Speed Open			180Ω	2 m 2 b	M1087	19/6
100Ω+100Ω	H85N	15/-	670Ω	4 C.O.	M1092	21/6
850Ω+850Ω	H85W	15/-	2500Ω	1 C.O.	M1022	22/6
1000Ω+1000Ω	H95A	17/6	5000Ω	2 C.O.	M1052	25/-

ERICSSON SEALED. Highly sensitive. 7000Ω 1 C.O. 24 v. 25/-.
Comprehensive range available from stock.

MAGNETIC COUNTERS

Counting to 9999.
2-6 v. D.C., **15/-** each, post 1/6, 75-230 v. D.C., **15/-** each, post 1/6.
HIGH SPEED TYPE No. 100c., **35/-**, post 1/6.

VEEDER-ROOT MAGNETIC COUNTER. General purpose type with zero reset. 800 counts per minute up to 999,999. 48 volt D.C., **55/-**, post 2/6.
SATCHWELL THERMOSTATS adjustable between 70°-100° fahrenheit. Operates 0-440 v. A.C., 20 amps., 11in. stem. Fitted cover. **25/-**, post 2/6.
ROOM THERMOSTAT. Adjustable between 45 and 75 deg. Fahr., 250v. 10 amp. A.C. Ideal for greenhouses, etc., **35/-**, post 2/-.
SOLENOIDS suitable for remote control, mechanical indicators, etc. 12 v. D.C., 400 mA., 30Ω, 3½in. arm, ½in. movement, **5/-** each, post 1/6.
TERMINAL BLOCKS. 2-way **4/-** doz., or box of 50 for **15/-**, 3-way **6/-** doz., 50 for **22/6**, post 1/6.

METERS GUARANTEED

F.S.D.	Size	Type	Price
100 Microamp	3½in.	MC/FR	80/-
50 Microamp	2½in.	MC/FR	70/-
250 Microamp	2½in.	MC/PR	40/-
500 Microamp	2½in.	MC/FR	37/6
1 Milliamp	2½in.	MC/FR	35/-
2 Milliamp	2½in.	MC/FR	25/-
30 Milliamp	2½in.	MC/FR	15/-
100 Milliamp	2½in.	MC/FR	15/-
200 Milliamp	2½in.	MC/FR	15/-
1 Ampere	2½in.	MC/FR	35/-
3 Ampere	2½in.	MC/FR	35/-
5 Ampere	2½in.	MC/FR	35/-
10 Ampere	2½in.	MC/FR	35/-
20 Volts	2½in.	MC/FR	35/-
30 Volts	2½in.	MC/FR	35/-
40 Volts	2½in.	MC/FR	35/-
500 Microamp	2in.	MC/FR	25/-
1 Milliamp	2in.	MC/FR	27/6
5 Milliamp	2in.	MC/FR	27/6
10 Milliamp	2in.	MC/FR	27/6
20 Volts	2in.	MC/FR	27/6
30 Volts	2in.	MC/FR	27/6
40 Volts	2in.	MC/FR	27/6
15 Amps	2in.	MC/FR	12/6
3 Amps	2in.	MC/FS	27/6
5 Amps	2in.	MC/FS	27/6
30-0-30 Amps	2in.	MC/FR	15/6
50-0-50 Amps	2in.	MC/FS	12/6
500 Milliamps A.C.	3½in.	MI/FR	30/-
25 Amps D.C.	2½in.	MI/FR	7/6
50 Amps A.C.	4in.	MI/F or PR	65/-
300 Volts A.C.	2½in.	MI/FR	25/-

Postage on meters 1/6

Complete list of meters available including the new Taylor pocket-size Multimeter Model 127A. 20,000 ohms per volt. 20 megohms, 20 ranges, A.C. and D.C. **£10**, post 2/6.

FREQUENCY METERS. 45-55 cycles per second 230 volts, 6in. dia., Flush Round. Brand new in maker's box, **£10/10/-**, post 3/6.
METER RECTIFIERS 250μA 1 M.A., 5 M.A., F.W. bridge, **8/6**, post 6d.
CROSS POINTER METERS. 2 separate 100 microamp movements, **22/6.**
MICROAMMETER. 250 F.S.D. 3½in. F.R. Sangamo Mod. S37. Scaled for valve voltmeter. Circuit available free, **55/-**, post 1/6.
UNI-PIVOT GALVANOMETER, by Cambridge Instruments, 50-0-50 microamps, dia. 4in. Knife pointer, mirror scale. Complete with leather carrying case. Ideal for laboratory use, **£10**, carriage 3/-.
PORTABLE VOLTMETER. 0-160 volts A.C./D.C. accuracy within 2%, 8in. mirror scale, knife pointer, in polished case. A precision moving iron instrument at a very low price, **84/19/6**, post 3/6.
WHEATSTONE BRIDGE 1 to 10,000 ohms, plug type, **£5**, carriage 7/6.
AVO TEST BRIDGES. 220/240 volt A.C. Measure capacities from 5 pf. to 50 mfd. and resistances from 5 ohms to 50 megohms. Valve voltmeter range 0.1 to 15 volts and condenser leakage test, **£9/19/6**, post 3/-.
RACKS—POST OFFICE STANDARD. 6ft. high with U-channel sides drilled for 19in. panels, heavy angle base, 4ft. 10in. in stock.

Your Own Telephone 75/-

TELEPHONE SET TYPE "A." Ringing and Speaking both ways on a four-core cable. Carries the voice loudly and clearly over any distance. Two handsets are supplied as illustrated and the set is complete with Pushes, Buzzers, Battery, Plugs and Sockets. We can supply 4-core PVC cable at **10d.** per yard or 2-core at **3d.** per yard extra. Price **75/-** set, post 3/6.
TELEPHONE SET "TELE-F." This is the best known portable telephone ever made, it has a built-in generator for ringing the other instrument and requires only twin wire between the sets. The set of two instruments and batteries in carrying case, **£7/10/-**, post 7/6. Twin flat P.V.C. wire **3d.** yard.
TELEPHONE SET TYPE "K." The most compact telephone set available as the 4½in. flat battery and buzzer is built-in to the hand instrument. Ringing and speaking both ways on twin wire, instrument is complete with 5ft. flex. Easily hangs on the wall. Set of two instruments, **£5/10/-**, post 3/6.
JACK PLUGS. Cylindrical bakelite screw-on cover, 2 contact, **2/6**, post 6d.
SOCKETS. One hole fixing for above, **3/6**, post 6d.



RESISTORS EX STOCK, IN QUANTITY WIRE WOUND, HIGH STABILITY CARBON ETC., BEST MAKES AT LOWEST PRICES.

MINIATURE PRECISION MOTOR, 12 v. D.C. Size 1⅞ × 1½in. diam. Latest development. Extremely powerful with low consumption. Weighs as little as two ounces and totally enclosed in polythene protective case. Three position switch; forward, reverse and stop. 7,000 r.p.m., self lubricating and long life sintered bronze bearing; **15/6**, post 9d. Ask for free length of polythene flexible drive.
ROTARY CONVERTERS. Input 12 D.C. Output 230 A.C. 50 cy. 135 watts. In fitted case with variable resistance, 0/300 voltmeter. The ideal job for T.V. and tape recorders where A.C. mains at not available. **£10**, carr. 15/-. Special connectors, one fitted with 6ft. heavy duty flex and clips for D.C. side, **10/-** set, post 1/-. **ROTARY CONVERTER,** input 12 v. or 24 v. D.C., output 230 v. A.C., 135 watts, **£3/10/-**, carriage 7/6.
ROTARY CONVERTER. Input 24 v. D.C. Output 220 v. A.C. 250 watts. Pedestal type with D.P. Ironclad switch. **BRAND NEW, £17/10/-.** Cge. 15/-.
BATTERIES. Portable Lead Acid type, 6 volts 125 ampere hours. In metal case 16in. × 8in. × 11in. (Two will make an ideal power supply for our 12 volt Rotary Converters.) Uncharged **£5/10/-** each, carriage 15/-. 24 volts 85 amperes, **£14** each, carriage 15/-.
16 AMP. BATTERY CHARGER (Westinghouse Type B.C.3) will charge three lead acid cells at 15 amps. Input 200/250 volts, 50 cycles A.C. Charging current is regulated by four-position switch and variable resistance for fine control. Fitted with 0/20 ammeter, rotary on/off switch and rewirable fuses. This first-class instrument at the bargain price of **£15,** carriage 15/-.
GEARED CAPACITOR MOTORS. 220-240 v. 50 cy., 30 watts, 300 r.p.m. also spindle for 1425 r.p.m. A powerful and useful motor, **75/-**, post 3/6.

¼ H.P. CAPACITOR MOTORS

230/240 volts, 50 cycles, 1420 r.p.m. ½in. shaft, resilient mounting. Or with ¼in. shaft on Standard foot mounting. Either type, **£5/10/-**, carriage 10/-.

SWITCHES ONE-HOLE FIXING

Single pole changeover, 3 amp. 250 volts, **1/6** each, **12/-** doz., **£37/10/-** per 1,000. Double pole on/off, 3 amps. 250 volts, with indicator plate, **3/-** each. Double pole on/off, 10 amps. 250 volts, Painton with chrome pear dolly, **5/-** each. Single pole on/off, rotary-type by Lucas, suitable for car dashboard, with chrome front, **5/6** each. Postage on all switches 9d.
SLYDLOK FUSES. 15 amp. with rewireable cartridge fuse. Latest type G15 M.M. Complete with studs, nuts and washers, **3/6** each, post 6d.
AUTO CABLE waterproof. Single. 14/36. **20/-** per 100 yds., post 1/6.

ELAC LOUDSPEAKERS P.M.

5in. Round, 3 ohms, 12/6, post 1/6.

NIFE BATTERIES, Nickel Cadmium, alkaline filled. 2.4 volt 10 ampere hours, **20/-** each, post 3/6.
PUMP Electrically Driven by a 24 v. D.C. motor. Works efficiently on 12 v. Totally enclosed, self lubricating driven through 4 to 1 reduction gearbox delivering 60 g.p.h./30lb./sq. in. Inlet and outlet unions ¼ BSP **37/6,** post 2/6.
OSCILLOSCOPE No. 1! with high-class amplifier, 230 v., **£12/10/-**, cge. 15/-

L. WILKINSON (CROYDON) LTD.
19 LANSDOWNE RD. CROYDON SURREY
Phone: CRO 0839 Grams: WILCO CROYDON

DEPENDABLE RADIO SUPPLIES LTD.

12a TOTTENHAM STREET, LONDON, W.1.
(2 minutes Goodge Street Street. Opp. Heals in Tottenham Court Road.)
Phone LANgham 7391/2 Hours of Business 9-6 (Mon. to Fri.)
Callers welcome. Terms: Cash with order or C.O.D.



POST OFFICE RELAYS TYPE 3,000

BUILT UP TO YOUR REQUIREMENTS

SAMPLES OR PROTOTYPES 24-hour service

Large Blocks always available

COMPONENT PARTS ALL PLATED

Yokes, 4/- each. Armatures, 1/3 each. Adjustable, 1/9 each. Spindles, 1/9 each.
Top plates, 3d. each. Bottom Plates, 3d. each. Armature Screws, adjustable, 4d. each.
Fixing Screws (with insulators), 2d. each. Buffer Blocks, 6d. each.

BUILD UPS CONTACTS

	Silver	Platinum		
1. C/O.....	1/3	4/-	Up to	100 Ohms
2. C/O.....	2/6	9/-	" "	500 "
3. C/O.....	3/6	12/-	" "	1,000 "
4. C/O.....	4/6	16/-	" "	5,000 "
6. C/O.....	6/6	24/-	" "	10,000 "
8. C/O.....	8/6	32/-	" "	20,000 "
Other build ups to order; all types of relays built to your specification.			" "	40,000 "
			" "	80,000 "

COIL VALUES

Single	Twin
3/-	5/-
4/-	6/-
5/-	7/-
6/6	8/6
9/-	—
14/-	—
16/-	—
to order	

*Slugged coils extra.

SIEMENS HIGH SPEED C/O RELAYS

250+250 ohms Twin Coils 7/6 1,000+1,000 ohms Twin Coils 10/6
1,700+1,700 ohms Twin Coils 17/6
1/6 Post and Packing on all relays.

G.E.C. MINIATURE SEALED RELAYS

No.	Ohms	Build Ups	Voltage	Price
Z530005	2	2 C/O	1.3 v.	12 6
Z530008	670	2 C/O	24 v.	19 6
Z530010	40	2 C/O 2K	7 v.	17 6
Z530014	2	1 C/O	1.3 v.	10 6
Z530015	40	1 C/O	6 v.	12 6
Z530016	180	1 C/O	12 v.	19 6
Z530018	2,500	1 C/O	48 v.	£1 2 6
Z530019	2	2 C/O 2K	1.3 v.	14 6
Z530020	2	4 C/O	1.3 v.	16 6
Z530021	2	2M	1.3 v.	10 6
Z530022	2	1M 1B	1.3 v.	12 6
Z530023	2	2B 2M	1.3 v.	12 6
Z530024	40	2M	6 v.	12 6
Z530025	40	1M 1B	6 v.	12 6
Z530026	40	2B 2M	6 v.	15 0
Z530027	180	2M	12 v.	17 6
Z530028	180	1M 1B	12 v.	17 6
Z530030	670	2M	24 v.	17 6
Z530031	670	1M 1B	24 v.	17 6
Z530034	2,500	1M 1B	48 v.	£1 2 6
Z530480	670	2B 2M	24 v.	19 6
Z530430	5,000	2 C/O	48 v.	£1 9 6
Z530429	2,500	2 C/O	48 v.	£1 2 6

S.T.C. MINIATURE SEALED RELAY

4184GD	700	2C	24	19 6
4190HC	170	2C	12	17 6

1/6 Post & Packing on all relays. SEND FOR LISTS

ROTARY TRANSFORMERS

Delivery ex stock. Quotations on application.

H.T. 31 Input 11.5 v. Output 250 v. at 120 mA.

H.T. 32 Input 11.5 v. Output 490 v. at 65 mA.

AS SUPPLIED TO GOVERNMENT DEPARTMENTS AND LEADING MANUFACTURERS. NEW AND BOXED.

ROTARY TRANSFORMERS Made by DELCO

TYPE 1, 27/6. P. & P. 3/6.
TYPE 2, 37/6. P. & P. 3/6.
Type 1. Dual voltage 12 or 24 v., input 265 v., 120 mA. output; 500 v., 26 mA. output.
Type 2. 12 v., input 275 v. 110 mA. output; 500 v., 50 mA. output.
Both types dual output. Made in U.S.A.

OTHER BARGAINS IN ELECTRONIC EQUIPMENT AVAILABLE
Send for list

EXPORT ONLY

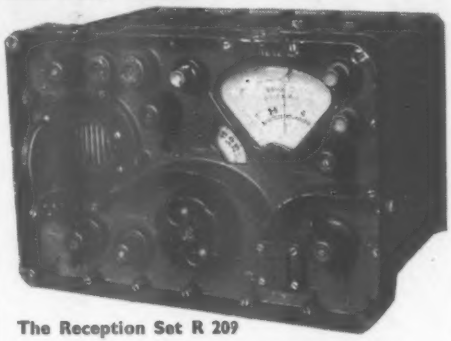

The Reception Set R 209

A 10 valve High-Grade Super Heterodyne Receiver with facilities for Receiving R/T (A.M. or F.M.) and C.W.

Hermetically sealed. Built on miniature valves and incorporating its own vibrator power supply unit driven by a 6 v. battery (2 point connector included).

The set provides for Reception from rod, open-wire or dipole aerial, with loudspeaker or phone output.

Overall measurements:—Length 12in., width 8in., depth 9in. Weight 23 lbs.

FULLY GUARANTEED AND TESTED

All enquiries:

P. C. RADIO LTD.

170, GOLDHAWK ROAD, W.12
Telephone: SHEpherds Bush 4946

TRANSFORMERS
COILS
CHOKES

LARGE OR SMALL QUANTITIES
TRADE ENQUIRIES WELCOMED

SPECIALISTS IN

FINE WIRE WINDINGS

MINIATURE TRANSFORMERS, PICK-UP, CLOCK AND INSTRUMENT COILS, ETC.
VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., M.O.S., I. E.B., ETC.
123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY
LIVINGSTONE 2261 EST. 1933

AUDIO OSCILLATORS
VALVE MILLI-VOLTMETERS
R.C. BRIDGES

We manufacture these, and other instruments, at extremely competitive prices and suggest it will be worth your while to write us for details

GRAYSHAW INSTRUMENTS

126 Sandgate High Street, Folkestone
Tel.: FOLKESTONE 78618 Kent

S.T.C. SELENIUM METAL RECTIFIERS. F/B, FOR BATTERY CHARGERS, ETC.

6 or 12 v. 1 amp.	5/-;	24 v. 1 amp.	10/-;
12 v. 2 amp.	7/6;	24 v. 2 amp.	15/-;
12 v. 2½ amp.	12/6;	24 v. 3 amp.	25/-;
12 v. 4 amp.	15/-;	24 v. 4 amp.	30/-;
12 v. 6 amp.	20/-;	24 v. 6 amp.	32/6;
12 v. 10 amp.	35/-;	24 v. 10 amp.	70/-;

NEW AND UNUSED ACCUMULATORS

12 v. 25 A.H. (as illus.) **45/-.** Carr. 7/6. (Ideal for use with our Amplifier in centre column).

2 v. 100 A.H. 75 actual (ex-Govt.) with carrying handle. Size 6½ x 6½ x 3¾in., 15/- each. Carr. 3/6.

2 v. 16 A.H., as above. 7½ x 4 x 2in., 5/- each. P. & P. 2/-.

6 for 24/-. P. & P. 10/-.

2 v. 14 A.H., as above (less handle). 7 x 2½ x 2½in., 5/- each. P. & P. 2/-.

TRANSFORMERS

POTTED C CORE

Pri.: 230 v. 50 c/s. **Sec.:** 450-0-450 v. 220 mA. 5 v. 3 amps., 6.3 v. 5 amps., 6.3 v. 3 amps. **£2/10/-.**

Pri.: 230 v. 50 c/s. E.S. **Sec.:** 500-0-500 v. 500 mA. 6.3 v., 500 mA. 6.3 v. 5 amps., 5 v. 6 amps. **£3/10/-.**

Pri.: 230 v. 50 c/s. **Sec.:** 6.8 v. 5 amps., 6.3 v. 1 amp., 6.3 v. 3 amps., 6.3 v. 1.5 amps., 6.3. v. 2 amps., 6.3 v. 3 amps., 6.3 v. 4 amps. **£1/12/6.** Carr. 5/- each item.

MAINS ISOLATING TRANSFORMER (Gresham). Pri. 230/250 v. Secs. 240-0-240 v. 1.5 amps., 5 v. 12.5 amps. Potted. Size 7in. x 7¼in. x 10¼in. Weight 50 lb. Ideal for obtaining TWO ISOLATED 240 v. lines at 360 watts each. Perfect condition. **80/-.** Carr. 10/-.

L.T. TRANSFORMERS for Battery Chargers etc. All Pri.: 200/250 v. Tapped 50 cycles. Type 048B. Sec. 24, 30, 36 v. 6 amps. 4 x 4 x 4in. **£2/9/6.** Type 066A. Sec. 18, 24, 30, 36 v. 8 amps. 4 x 4 x 5in. **£3/19/6.** Type 053A. Sec. 12, 24, 30 v. 10 amps. 4 x 5 x 5in. **£4/4/-.** Carr. 3/6 each item.

AUTO TRANSFORMERS. 0-110, 205, 225, 245 v. Fully shrouded Terminal block connectors.
Type 063A. 500 w., 4 x 5 x 5in. **£3/7/6.** Carr. 3/6.
Type 064A 750 w. 4 x 6 x 5in. **£3/17/6.** Carr. 3/6.
Type 065A. 1000 w. 4 x 7 x 5in. **£4/17/6.** Carr. 5/-.

3 kV/A. AUTO TRANSFORMER. 250/110 v. 50 cycles (fully tapped primary and secondary). Capable of 25% over actual rating. Brand new and unused, **£12/10/-.** Carr. 20/-. Also **6 kV/A.** as above. **£18.** Carr. 20/-.

20 kV/A. AUTO-TRANSFORMER. 230/115 v. 50-60 cycles. by Jefferies Transformer Co., U.S.A. Perfect condition, **£20.** Carr. 20/-

CONSTANT VOLTAGE TRANSFORMER 190-260 v. primary, sec. 115 v. at 1¼ kV/A. (listed at 2 kV/A). Brand new and unused. **£25** or **£45** per pair. Carr 10/- each.

E.H.T. TRANSFORMER. 8,000-0-8,000 at 400 mA. Primary 230 v. 50 cycles. Oil filled. New and in original crates. **£25.** Carr 10/-.

E.H.T. TRANSFORMER. 1,800-0-1,800 at 1 kV/A. 230 v 50 cycles primary. Fully tropicalised. New and boxed. **£6/10/-.** Carr 10/-.

E.H.T. TRANSFORMER. 1,100-0-1,100 at 250 mA. plus 4 v. L.T. Pri. 200/250 v. at 50 cycles. **£5.** Carr. 10/-.

HEAVY DUTY REGULATING RESISTOR. 0.25 ohm. 200 amps. Wheel control. **£4/15/-.** Carr. 10/-.

CONDENSER, oil filled. 240 mfd. 230 v. A.C. or 600 v. D.C. Made in U.S.A. Size 2lin. x 5¾in. x 9in. Brand new in original cases. **£7/10/-.** Carr. 5/-.

ROTARY CONVERTER. 24 v. D.C. input. 230 v. A.C. output at 250 watts. Complete with starting switch. New and unused. **£15.** Carr. 7/6.

ROTARY CONVERTER. 24 v. D.C. to 230 v. A.C. 50 cycles, 150 watts. Brand new and unused. **£8/10/-.** Carr. 7/6. Ditto, 100 watts **£6/9/6.** Carr. 7/6.

ROTARY CONVERTER. Ex-Govt. 12 v. D.C. input, 230 v. A.C. output 50 cycles at 135 watts. Complete in carrying case with lid. Voltage control, sliding resistance, mains switch and 0-300 v. A.C. flush meter. In good condition. **£10.** Carr. 10/-.

Motor only, without case, etc. Brand new and unused. **£8/10/-.** Carr. 5/-.

GEE BROS. (RADIO) LTD.

15 LITTLE NEWPORT STREET, LONDON, W.C.2. *GER. 6794/1453*

ADJOINING LEICESTER SQ. TUBE STATION—Open 9-6 Weekdays. 9-1 Sat.

BAKERS 'SELHURST' SPEAKERS

ALL BRAND NEW



SPECIAL NEW ARRIVAL!
" 15in. VISCOUNT AUDITORIUM "
15 ohms at 400 c.p.s., 35 watts. Flux density 18,000.
OUR PRICE £15.

"12in. P.M.," 15 ohms, 15 watts, 30-14,000 c.p.s. Our price **£4/10/-.**

" AUDITORIUM " 12in., 15 ohms, 12 watts. 35-16,000 c.p.s. Flux density 14,500. OUR PRICE **£7/10/-.**

" SUPER Hi-Fi 25 " 12in., 15 ohms, 25 watts 25-20,000 c.p.s. Flux density 17,600. OUR PRICE **£9/9/-.**

Full descriptive specification is available

12 VOLT D.C. AMPLIFIER (Parmeko, Ardente). As new, 15 watt output with 2-EL35's in push-pull. Mike and gram. inputs, tapped output transformer, **£9/19/6.** Carr. 10/6.
(Suitable microphone for above 30/- extra.)

EXPONENTIAL HORNS by famous manufacturer of P.A. systems. **15 watt,** 25 in. long, 20in. square flare 15 ohms speech coil. (Tannoy) Good condition, **£7/10/-.** Carr. 10/-.

NEW P.M. HEAVY DUTY SPEAKERS
Complete with O.P. trans., in all steel blue-grey double grilled cabinet. 6in. 30/-. 8in. 32/6. Carr. 3/6 each.

10in. SPEAKER in wooden cabinet, size approx 14 x 16 x 8in. with padded interior and volume control, **50/-.** Carr. 3/6.

RE-ENTRANT LOUD HAILERS (Ex-Govt.) Heavy duty 20 watts all-metal 15 ohms. Diameter 15in., length 15in. (approx.) good cond. **£6/10/-** Carr. 10/-. Ditto. Brand new, **£8.** Carr. 10/-.

HEAVY DUTY ALL STEEL TRIPOD STANDS (as illus. Sept. issue) Adjustable every 6in. to approx. 9ft. 6in. when fully extended. (Folds up to only 4ft. 6in. for storage.) Suitable for outdoor speakers, public address systems, flood-lighting, etc. OUR PRICE **£3/10/-.** Carr. 5/-. (Ideal stand for the above loud hailer.)

TRUVOX/TANNOY LOUD-HAILERS
With 180 ohm line transformer and condenser. Impedance 7½ ohms, handling capacity 8 watts. Complete in slope-front wooden case. Brand new **25/-.** Carr. 4/6.

G.P.O. RACKS
19in. Heavy duty all steel Standard drilling.
5ft. 6in. angle uprights. £3/10/-. Carr. 15/-.
6ft. channel uprights. £5. Carr. 15/-.
7ft. channel uprights. £6. Carr. 15/-.

QUALITY TEST EQUIPMENT

WAVEMETER CLASS D. Freq. band 1,900 Kc/s to 8,000 Kc/s. (158-37.5 metres) in two ranges, 1,900 Kc/s-4,000 Kc/s also 4,000 Kc/s-8,000 Kc/s. Supply 6 v. D.C. input. Complete with twin crystal, spare vibrator, headphones, original instruction manual and transit case. Condition as new. **£5/5/-.**

EVERSHED AND VIGNOLES MEGGER CIRCUIT TESTER (low reading ohm meter). 2 ranges 0-3, 0-30 ohms. The perfect meter for continuity and polarity testing, complete with test leads and ready to use. Brand new. Only **£4/17/6.** P. & P. 3/-.

BRIDGE MEGGERS. Evershed and Vignoles. Series 2 in perfect condition. 250 v. **£22.** Carr. paid. Leather case available at **20/-** extra.

MARCONI SIGNAL GENERATOR. TYPE TF517-F/1. Covering 10-18 Mc/s. 33-58 Mc/s. 150-300 Mc/s. In very good condition. Complete with full technical data and instructions. Unrepeatable at only **£12/10/-.** Carr. 20/-.

BRAND NEW CRYSTAL CALIBRATOR No. 10. (Battery powered 1.4 v. valves.) Complete with full working instructions, circuit diagram, carrying haversack connecting lead and spare valves. Frequency range: 1.5 to 10 Mc/s. (nominal) but can actually be used up to 30 Mc/s. Weight 5lb. Size 7 x 7½ x 4in. As fully described in "Practical Wireless," Dec. issue, pages 691-693. ONLY **£4/19/6.** P. & P. 2/6.

MULLARD BRIDGE. Type GM. 4140/1. Mains operated from 100-250 v. A.C. Will test resistances from 0.1 ohm to 10 megohms and condensers from 10pf. to 10mfd. Good condition and complete with instruction booklet. **£6/19/6.** P. & P. 2/6.

TAYLOR VALVE TESTER Model 47A. Input 200-250 v. A.C. Will test all types of English and American valves with filaments from 1.1 v. to 117 v. Perfect condition. Complete with full instruction manual. **£12/10/-.** Carr. paid. Also MODEL 45A available at **£10/10/-.**

18-LINE TELEPHONE SWITCH-BOARDS. For the complete control of 10 extensions (Tele. " F " etc.). Complete with racks, leads and operator's hand set. Good condition. **£9/19/6.** Carr 10/6.

TELEPHONE SETS (TELE " F ")
Housed in Bakelite cases, complete with built-in ringing generators and batteries. Ideal between two or more positions up to practically any distance. Tested before despatched. ONLY **70/-.** P. & P. 3/6. 2 sent for **£6/10/-.** Carr paid.

R.C.A. AR88-D RECEIVER
Mint condition. Freq. coverage 540 Kc/s.-32 Mc/s. £50. Carr. 20/-. Also L.F's available. Freq. coverage 75-550 Kc/s., 1.5-30 Mc/s. £45. Carr. 20/-.

A.C.-D.C. RECTIFIER POWER SUPPLY UNITS
110/230 v. A.C. 50 cycles input, 100/110 v. D.C. output max. 2½ amp. Brand new and unused. **£4/10/-.** Carr. 7/6.
230 v. A.C. 50 cycles input, 200/220 v. D.C. output at 3/4 amps. approx. Good condition. **£10.** Carr. 10/-.
200/250 v. pri., 110 v. sec. at 4 amps. max. Brand new and unused. **£8/10/-.** Carr. 10/-.
Type 67. 200/230 v. A.C. 50 cycles input, 240-0-240 v. D.C output at 1½ amps. (Valve rectification.) With overload controls. Brand new in maker's original crates. **£18.** Carr. 10/-.

AIRBORNE TRANSMITTER RECEIVER TYPE 1986. A mobile 10-channel crystal controlled V.H.F. Tx/Rx. covering 124.5/156 Mc/s. I.F. band width 23 kc/s. Complete (less external attachments) in metal case, with all valves and 24 v. rotary power unit. Used but in first-class condition. ONLY **£8/10/-.** Carr. paid. Also, complete with control box and all necessary connecting leads. **£12,** carr. paid.

COLLARO "STUDIO" TAPE TRANSCRIPTORS. Brand new in original cartons 3 speeds. 1⅞, 3¾, 7½ i.p.s. 3 motors, digital counter, etc. Complete with 7in. spool instructions and fixings. A.C. 200/250 v. operation. **SPECIAL PRICE £12/10/- only.**
RECORDING TAPES. Super quality P.V.C. 1,800ft. L.P. 7in. spools, **30/-;** 1,200ft. Std. 7in. **19/-;** Empty 7in. spools **3/9** each.
Send S.A.E. for current Tape Bargain List.

Tubes

HIGHEST QUALITY—NEW LOW PRICES
Carr. & Ins. 12/6 GUARANTEED

MOST MULLARD, MAZDA, COSSOR, AMETRON, EMI, SCOPES, BRIMAR, FERRANTI TYPES PROCESSED IN OUR OWN FACTORY. New Mullard, Mazda & U.S.A. guns used. NEW 108K (Equiv. 3/16) 39/-	6 Months REVACUUMED	12 Months RESOUNDED	12 Months NEW TYPES
9/10in.	£2- 0-0	£3-10-0	Mw 31/74 £5-0-0
12in.	£2-10-0	£4-10-0	Mw 36/24 £6-15-0
14in.	£3- 0-0	£5- 0-0	Mw 43/64 £7-15-0
15/17in.	£3-10-0	£5-15-0	
21in.	£4-10-0	£6-15-0	

4-SPEED RECORD PLAYERS

Latest Turntable, together with lightweight Stear Galaxy dual sapphire crystal turnover pick-up head. Amazing value (Pick-up only 19/-). £3/10/-. Carr. 3/-.

S.S.R. Monarch (WA3)	£6 15 0
COLLARO CONQUEST	£6 19 0
S.S.R. Latest UA14	£7 19 0

STEREO OUTFITS
Consisting of two 3 valve (10F3, 10P14, UU9) 3-watt mains amplifiers each complete with 4in. loudspeaker in neat bakelite cases with independent controls, together with UA8 Stereo changer and screened leads. Unrepeatable £11/10/-!

AMPLIFIERS ONLY 49/- EACH.

UA8 STEREO CHANGERS
S.S.R. Monarch Autochangers fitted with quality Stereo Cartridge. Truly amazing value at £6/19/-

13 CHANNEL TV's

TABLE MODELS, FAMOUS MAKES. Absolutely complete
These sets are unequalled in value due to huge purchase direct from source. They are untested and are not guaranteed to be in working order. CASES, ETC. 15/-.

12" — £3.19
14" — £6.19
ALSO 12" 5 CH. TV's 55/-

TRANSISTORS:

RED SPOT 3/9 each 42/- doz.
WHITE SPOT 5/6, each. 63/- doz.

PM SPEAKERS

Top Makes Guaranteed
6in. 8/- 5in. 7×4 11/- 10in. 10×6 13/-
8in.

I.T.V. CONVERTERS

with power pack. Very compact External /Internal fitting. Band change switch. Manuf. cartons. Listed £7 39/-

VALVES

BY RETURN OF POST
GUARANTEED 3 MONTHS
NEW LOW PRICES

10% DISCOUNT of any SIX VALVES marked in black type (15% in dozens). Post: 1 valve 6d.; 2-11, 1/-.
SPECIAL OFFER TO PURCHASERS
FREE TRANSIT INSURANCE. All valves are new or of fully guaranteed ex-Government or ex-equipment origin. Satisfaction or Money Back Guarantee on goods if returned unused within 14 days.

OZ4	5/-	6K8G	5/9	20P1	11/6	EB34	1/6	EN31	16/-	T41	7/6
1A7GT	11/9	6K8GT	11/-	20P3	19/6	EB41	7/-	EY51	9/-	U14	9/-
1C5GT	10/6	6K25	7/6	20P4	17/-	EB91	2/9	SMALL	9/-	U18	9/6
1L5GT	9/9	6L1	19/6	20P5	18/6	EBC33	5/-	EY86	8/6	U25	9/9
1L4	3/9	6L6	9/6	25A6G	8/-	EBC41	8/6	EZ40	6/9	U26	7/6
1N5GT	9/9	6L6G	6/9	25L6G	6/9	EBC81	7/9	EZ41	7/6	U35	13/6
1R5	6/6	6L7	9/-	25L6GT	9/-	EBF80	2/6	EZ80	6/9	U36	10/-
1S4	3/9	6L18	9/6	25Z6G	8/-	EBF83	2/6	EZ81	7/3	U37	6/8
1S5	3/9	6L19	11/6	27SG	16/-	EBL21	14/-	GT1C	7/-	U38	11/-
1T4	4/9	6LD20	2/6	30F3	7/-	EBL31	16/-	GZ32	8/3	U85	8/9
2D21	4/6	6P25	9/-	30FL1	9/6	EC52	2/9	GZ34	12/6	U37	26/6
3A4	5/6	6P28	9/-	30P4	12/6	EC81	2/6	HABC80	9/6	U50	6/-
3Q4	7/3	6Q7G	6/9	31P12	8/-	EC83	4/-	HL41DD	2/6	U52	5/6
3S4	6/6	6Q7GT	9/3	30FL1	10/6	EC86	6/6	HVR2	7/6	U191	10/6
3V4	6/6	6SA7	5/9	35L6GT	8/-	EC88	6/9	KT33C	6/6	U281	2/6
5Z4G	11/-	6S67	4/9	35W4	6/6	EC91	4/6	KT66	9/-	U282	15/-
5U4G	5/6	6SH7	4/6	35Z4GT	6/-	EC92	6/6	KT44	6/6	U301	14/-
5Y4G	6/9	6SJ7	6/-	50CD6G	15/-	EC93	7/6	KT45	6/6	U309	12/6
5Y3G	6/-	6SK7	5/3	50L6GT	9/3	EC94	2/9	KT61	9/-	U329	12/6
5Y3GT	6/6	6SL7GT	4/6	61SFT	11/-	EC95	2/3	KT66	12/6	U339	11/-
5Z4G	5/6	6SN7GT	4/9	80	6/6	EF50	10/3	KT81	14/-	U403	9/6
5Z4GT	11/-	6SQ7	6/6	90AV	4/6	EF37A	5/9	KTW61	8/6	U801	20/-
6A8G	9/6	6U7G	4/6	155BT	16/-	EF39	2/6	KTW62	4/9	UABC80	8/9
6AC7	4/3	6U4GT	10/6	807A	6/-	EF80	2/6	KTZ63	5/3	UAF42	9/-
6AG5	4/3	6V6G	5/6	807B	3/9	EF85	2/9	MU14	5/-	UB41	9/-
6AG7	5/6	6V6GT	6/6	935	3/9	EF86	5/3	N37	11/-	UBC41	9/3
6AK5	3/9	6X4	3/6	954	2/9	EF91	2/3	N78	12/-	UBC81	10/-
6AL5	2/9	6X5G	5/6	2050	2/6	ECL82	10/-	P41	4/6	UBF80	3/9
6AM5	2/9	6X5GT	6/6	9001	4/-	ECL83	14/6	P61	9/3	UBF89	3/6
6AQ5	6/-	7B6	9/6	9003	4/-	EF92	12/-	PABC8011		UBL31	14/6
6AT6	7/-	7B7	7/3	ATP4	2/9	EF93	3/3	PCC84	7/9	UCH21	14/6
6AU6	3/6	7C6	7/3	AZ31	6/-	EF95	4/3	PCC85	9/3	UCH42	9/6
6B8G	3/6	7C6	7/3	E36	4/6	EF40	13/6	PCC89	12/9	UCH81	9/-
6BA6	6/-	7H7	7/6	E55	4/9	EF41	2/9	PCF80	7/6	UCL82	11/3
6BE6	9/-	7S7	9/6	CBL31	23/3	EF42	7/6	PCF82	9/-	UCL83	13/6
6GB6G	12/6	7Y4	7/6	CY31	9/9	EF50-BR2	/-	PCL82	9/3	UF41	6/6
6BW6	8/-	10C1	11/-	D63	1/6	EF50-ARM2	6	PCL83	11/6	UF42	7/9
6BW7	6/9	10C2	12/6	DA90	2/6	EF54	3/3	PCL84	9/9	UF80	9/-
6C4	3/6	10F1	6/9	DAC32	9/9	EF80	5/9	PEH25	4/6	UF85	9/-
6C8	4/3	10F9	10/3	DAF91	6/-	EF85	7/-	PEH45	7/3	UF86	14/6
6CD	11/6	10F18	9/6	DAF96	8/3	EF86	11/-	PEH46	6/3	UF89	7/3
6CD6G	18/6	10P13	9/6	DF33	9/9	EF89	5/-	PL36	8/-	UL41	7/6
6CH6	8/3	12AH8	9/9	DF91	5/-	EF91	2/9	PL36	11/-	UL44	13/6
6D6	4/9	12AT6	7/9	DF96	8/3	EF92	4/9	PL38	14/6	UL48	9/9
6F1	6/9	12AT7	5/6	DH77	7/-	EL32	4/6	PL81	9/9	UL84	8/-
6F6G	9/3	12AU7	11/9	DK32	12/6	EL33	7/9	PL83	7/9	UM80	9/6
6F13	6/9	12AX7	7/6	DK91	6/9	EL35	8/6	PL83	9/-	UU5	12/6
6F14	11/6	12J5GT	3/6	DK92	8/6	EL37	11/6	PL84	11/-	UU7	9/6
6F15	11/6	12K7GT	6/-	DK96	9/3	EL38	12/6	PY81	9/3	UY1N	11/-
6H6	2/-	12K8GT	12/-	DL33	8/6	EL41	8/6	PY32	11/-	UY41	9/6
6J6G	2/9	12Q7GT	6/-	DL35	10/6	EL42	8/6	PY80	7/-	UY85	7/-
6J5GT	3/6	12SK7	5/6	DL91	9/9	EL84	7/9	PY81	7/-	VR150/30	5/6
6J6	4/-	12SN7GT	5/6	DL92	6/6	EL91	4/9	PY82	7/-	X65	11/-
6J7G	5/-	1457	14/9	DL94	7/6	EM34	8/6	PY83	8/-	X66	11/-
6J7GT	7/9	19BG6G	15/-	DL96	8/3	EM80	8/9	PZ30	11/-	X78	14/6
6K6GT	6/6	20D1	9/6	EA50	9d.	EM81	9/3	R19	12/6	X79	16/6
6K7G	2/3	20F2	9/6	EABC80	7/6	EM84	9/9	SP41	2/6	Y63	6/3
6K7GT	4/9	20L1	9/6	EAF42	8/3	EM85	10/6	SP61	2/6	Z66	7/6

List of 1000 Special Offers 6d. Callers always welcome.

TECHNICAL TRADING CO.

350-352 FRATTON ROAD, PORTSMOUTH
POST: 2 lbs. 1/6, 4 lbs. 2/-, 7 lbs. 2/9, 15 lbs. 3/6. No C.O.D.

T.C.C. "CATHODRAY" VISCONAL TYPES. 1 mfd., 2 kV. wkg., 7/6 each. 0.25μF., 4 kV. wkg. 6/- each. 0.05μF., 5 kV. wkg., 7/6 each. 0.1μF., 5 kV. wkg., 6/6 each. 0.05μF., 5 kV. wkg., 6/6 each. 0.1μF., 6 kV. wkg., 7/6 each. 0.5μF., 2.5 kV. wkg., 6/6 each. 0.25μF., 2.5 kV. wkg., 6/- each. 0.0025μF., 6 kV. wkg., 5/- each. 0.0025μF., 8kV. wkg. 4/6 each. 0.005μF., 5kV. wkg., 5/- each. 0.0025μF., 3 kV. wkg. 4/- each. 0.025μF., 2.5 kV. wkg. 4/6 each. 0.0025μF., 2.5 kV. wkg. 4/- each. 0.005μF., 2.5 kV. wkg. 4/- each. 0.05μF., 3 kV. wkg. 4/6 each. All the above are tubular and mounting.

BLOCK PAPER TYPES. 10 mfd., 1,500 v. wkg. 15/- each, post 3/6. 8 mfd. 1,200 v. wkg. 11/6 each. 8 mfd. 500 v. wkg. 5/- each. 6 mfd. 500 v. wkg. 5/6 each. 4 mfd. 500 and 750 v. wkg. 4/6 each. 4 mfd. 1 kV. 5/6 each. 4 mfd. 2 kV. wkg. 6/6 each.



POWER UNITS

100-250 v. A.C. input. 24 v. D.C. at 3 amps. or 12 v. twice at 3 amps. each winding. Continuous tropical rating switched and fused, etc. In metal case that fits 19in. rack, size 19 × 7 × 7in. Brand new £3/15/-. Carr. 7/6 (with circuit).

SMOOTHING UNIT

for the above power supply. 2 choices and 0-1 mA meter (grade 1), metal case, same as the p.u. £2. Carr. 7/6.

RANGE CONVERTOR

(part of R20 6 Rec.), 115-600 kc/s, on three bands, large dial with a Muirhead slow motion drive. Valves EF39, ARTH2, the set can be used with R107, R208 and many other types of receivers. 32/6 each. Carr. 7/6.

GRAHAM GEARED MOTORS

115 v. A.C., 1/6th H.P., variable speed box 0-166. Size of unit 14½ × 9½ × 8in. £3/10/-. Carr. 10/-.

INDICATOR UNIT Type I-182-c (U.S.A.) 3in. tube 3DP1, 1 rectifier 2 × 2 and 3 × 6AG5, with controls, etc. In a neat metal box 11 × 6 × 6½in., 50/- each. Post 2/6.

ROTAX CONVERTORS Type 8A, 24 v. D.C. input, 115 v. A.C. at 1.3 amps. 400 c.p.s. 3-phase. Just the job for the laboratory or experimenting. £8/10/- each. Carr. 7/6 ea.

U.S.A. R-8/APH-4 RECEIVERS, designed for RDF. Valves 1-6SN7, 4-6SK7. 1-VR105, 1-5U4G, 1-6SL7, 2-6B4G, 2-879/2, 1-6SJ7, all GT type. Complete unit with transformers, condensers, etc. As new, first-class condition. Price £5/- each. Packing and carriage 7/6.

MODULATOR UNITS. MD 7/ARC5. 2 × 1625, 12J5, VR150, Modulation transformer. 5 Relays, etc. 32/6 each. Post 2/6.

MOVING IRON METERS. 0-100 amps. 6in. scale, at 22/-; 90-120 v., 4in. scale at 35/-. Post 2/-.

AMERICAN L.T. TRANSFORMERS. Potted type, finished in black crackle and very conservatively rated. (1) 230 v., input, 2 × 6.3 volts CT, at 2 amps. and 6.3 volts at 3 amps. output, 18/3 each. (2) 230 volt input, 2 × 6.3 volts at 3 amps. and 6.3 volts CT, at 3 amps. output, 17/6 each. (3) 230 volts input, 28 volts at 2 amps. and 2 volts at 1 amp., 12/6 each. (4) 230 volts input, 3 × 6.3 volts at 3 amps. CT. 1, 6.3 volts 3 amp., 23/6 each. (All these transformers are new and boxed, please include postage 3/6 each.)

CATHODRAY TUBES. CV 1526 (2EG1) 3 inch fl. 4 volts. Anode 1,300 volts. Base same as 139A, U12. 35/- each. Carriage 2/6. CV 1525 (139a). Ideal tube for the small scope, 35/- each. Packing and carriage 2/6. Brand new.

AMERICAN COMPUTERS AN-II-70A. Single parallax. Contains 8 relays 10 k., 2 change-over plat. contacts, 8 relays 200 ohms, 2 change-over silver contacts (all relays are small type), 9 × 6V6 small GT., 3 × 6X5 GT., and 2 6SN7. Seven small D.C. motors 27 v. 6 selsyn motors, 10 small micro switches. Plus gears, condensers, ball bearings and pots, etc. This unrepeatable bargain. £10 each.

DOUBLE PARALLAX AN-II-70-B. Similar to the above but larger, etc., weight 140lb. Brand new £12/10/- each. Carr. £1.

DEEK TELEPHONES (standard type No. 1) complete with the handset and cord ready to connect to line, 29/15/- each. Post 3/6, or £5 a pair.

DORMITZER GEARED MOTORS. 115 volts A.C. Output 95.3 R.P.M. As new. Price 45/- each. Transformer to operate this motor 12/6 each. Post 3/6.

MOTOR ASSEMBLY. Servo unit, C-1 11 A G1020. 26 volts D.C. Auto pilot. New in cartons. Price £3/10/- each. Carriage 7/6. C-1 Auto pilot flight gyro unit. Price £3/10/-. each Carriage 5/-.

VARIABLE RESISTORS, 3 ohms 10 amps., 18/6 each. Post 3/-.

35FT. AERIAL MASTS. Heavy galvanised steel tubes, four sections, tapered 2½ to 1 inch. No guy ropes needed. £12/10/- each. Weight 2 cwt.

TRANSFORMERS (drop thro' type). 110 and 230 volts pri., 275-0-275 at 125 mis., 6.3 v., at 0.9 amps., 6.4 v. at 4 amps. Size 4 × 4 × 4½in., 22/6 each. Post 3/-.

ROTARY CONVERTORS. 24 volts D.C., input 11 amps. 230 volts A.C., output at 50/100 watts D.C., regulated, voltmeter 0-300, starter and controls, also fuses on the front of the panel. Finished in grey, size 24 × 15 × 10in. £17/10/- each.

TRANSMITTERS. Type CWS 52244. Model YG.1. 115 v. A.C., 25 watts. Carrier 246 Mc/s. Beacon transmitter. £18/10/- each. (For export only.)

CANADIAN MIKES CB, with lead and plug. 7/6. Post 1/6.

INDICATOR UNIT, with two 5FP7 tubes etc. 42. Post 3/6.

LIST AVAILABLE SEND 6d. IN STAMPS

PLEASE INCLUDE POSTAGE ON GOODS
TERMS C.W.O. All goods offered are ex-W.D. S.A.E. for enquiries.

W. MILLS

3-B TRULOCK ROAD, TOTTENHAM, N.17
Phone: Tottenham 9213 & 9330

DOUBLE BEAM 'SCOPE'

For D.C. & A.C. APPLICATIONS

Engineered to precision standards, this high-grade instrument is made available at the lowest possible price, incorporating the essential features usually associated with luxury instruments. This "SCOPE" will appeal particularly to Service Engineers and Amateurs. A high gain, extremely stable differential Y-Amplifier (30 mV/C.M.). Provides ample sensitivity with A.C. or D.C. inputs. Especially suitable for measurement of transistor operating conditions where maintenance of D.C. levels is of paramount importance. Push-Pull X amplifier; Flyback suppression; Internal Time base Scan Waveform available for external use; pulse/output available for checking T.V. Line O/P Transformers, etc.; Provision for external X I/P and CRT. Brightness Modulation. A.C. mains 200/250 v. £19/19/- plus P. & P. 7/6 or 50/- deposit, plus P. & P. 7/6 and 12 monthly payments of 33/4.

FULL 12 MONTHS' GUARANTEE INCLUDING VALVES AND TUBE

ALIGNMENT ANALYSER TYPE MC12

A.C. MAINS, 200/250 volts. Provides:—"WOBBULATOR" (SWEPT FREQUENCY) OPERATION, for FM/TV alignment linear frequency sweep up to 12 Mc/s. From 400 Kc/s—30 Mc/s. CAPACITANCE MEASUREMENT. Two ranges provided 0-40 pf. and 0-120 pf. SPECIAL FACILITY enables true resonant frequency of any tuned circuit I.F. transformer, etc., to be rapidly determined. Cash price £6/19/6 and 5/- P. & P. H.P. terms 25/- deposit and 5/- P. & P. and 6 monthly payments of 21/6.

CHANNEL TUNER



Will tune to all Band I and Band III stations. BRAND NEW by famous manufacturer. Complete with P.C.C. 84 and P.C.F. 80 valves (in series) I.F. 16-19 or 32-38. Also can be modified as an aerial converter (instructions supplied).
Complete with knobs.

32/6 Plus 3/6 P. & P.

HEATER TRANSFORMER

To suit the above, 200-250 v. 6/- Plus 1/6 P. & P.

B.S.R. MONARCH UA8 with FUL-FI HEAD

4-speed plays 10 records 12in. 10in., or 7in. at 16, 33, 45 or 78 r.p.m. Intermixes 7in., 10in and 12in. records of the same speed. Has manual play position; colour brown. Dimensions: 12½in. × 10½in. Space required above baseboard 4½in., below baseboard 2½in. Fitted with Ful-Fiturnover crystal head. £8/19/6. Plus 5/- P. & P.

STEREO HEAD £7/19/6 Plus 5/- P. & P.

LINE E.H.T. TRANSFORMER

With built-in line and width control. 14 KV. Scan coil, 90° deflection, on ferrite yokes. Frame O.P. transformer 500 pf. 18 KV. smoothing condenser Can be used for 14in., 17in. or 21in. tubes.
Complete with circuit diagram. **29/6** Plus 4/- P. & P.

As above, but for 625 lines **£2.10** Plus 4/- P. & P.

FOCUS MAGNET suitable for the above (state tube), 10/-. 2/6 P. & P.

MAINS TRANSFORMERS

All with tapped primaries 200-250 volts.

0-160, 180, 200 v., 60 ma., 6.3 v. 2 amps., 10/6. 250-0-250, 80 ma., 6.3 v., 2 amp., 6.3 v., 1 amp., 10/6. 350-0-350, 70 ma., 6.3 v. 1 amp., 6.3 v. 2 amp., 10/6. 250-0-250, 70 ma., 6.3 v., 2 amp. 10/6. Postage and packing on the above 3/-.

SURFACE BARRIER TRANSISTORS

type SB 305, 15 Mc/s. **7/6** each.

100% AUDIO TRANSISTORS

5/- each.

BATTERY RECORD PLAYER AND AMPLIFIER

Incorporating 45 r.p.m. "Starr" motor, "Acos" crystal pick-up, 3 transistor push-pull amplifier complete with transistors. Output 500 milliwatts, 49/6 plus 3/6 P. & P.

SIGNAL GENERATOR



Covering 100 Kc/s.-100 Mc/s. on fundamentals and 100 Mc/s. to 200 Mc/s. on harmonics. Metal case 10in. × 6½in. × 5½in. grey hammer finish. Incorporating three miniature valves and Metal Rectifier. A.C. Mains 200/250 v. Internal Modulation of 400 c.p.s. to a depth of 30%. Modulated or unmodulated R.F. output continuously variable 100 millivolts C.W. and mod. switch. variable A.F. output. Incorporating magic-eye as output indicator Accuracy plus or minus 2%.

£6/19/6

Or 25/- deposit and 6 monthly payments of 21/6. Post & Packing 5/- extra.

SIGNAL GENERATOR



Coverage 120 Kc/s.—230 Kc/s., 300 Kc/s.—900 Kc/s. 900 Kc/s.—2.75 Mc/s., 2.75 Mc/s.—8.5 Mc/s., 8 Mc/s.—26 Mc/s., 16 Mc/s.—56 Mc/s., 24 Mc/s., 84 Mc/s. Metal case 10in. × 6½in. × 4½in. Size of scale 6½in. × 3½in. 2 valves and rectifier A.C. mains 220-250 v. Internal modulation of 400 c.p.s. to a depth of 30 per cent. modulated or unmodulated R.F. Output continuously variable, 100 millivolts C.W. and mod. switch variable A.F. output and moving coil output meter. Grey hammer finish case and white panel. Accuracy plus or minus 2%.

£4/19/6

Or 25/- deposit and 4 monthly payments 21/6. P. & P. 5/- extra.

SIGNAL & PATTERN GENERATOR



£6/19/6 P. & P. 5/-.

Or 25/- deposit. P. & P. 3/- and 6 monthly payments of 21/6.
Coverage 7/6 Mc/s.-210 Mc/s. in five bands, all on fundamentals slow motion tuning audio output. 8 vertical and horizontal bars, log-ging scale. In grey hammer finished case with carrying handle. Accuracy ±1% A.C. mains 200-250 v.

CYLDON TURRET TELETUNER

I F 34/38 Mcs. Brand new complete with biscuit for channels 2, 4, 8 & 9.

less valves **10/-** plus 2/6 P. & P.
(Valves required P.C.C., 84 & P.C.F. 80.)
Pair of knobs to suit above, 3/6.

3-TRANSISTOR POCKET RADIO

INCORPORATING MINIATURE SPEAKER
Plus GERMANIUM DIODE and PRINTED CIRCUIT
Size 3½ x 4 x ⅞in.

Incorporating Ferrite Rod Aerial. Two Surface Barrier Transistors and one Audio. Tunable over medium and long waves.

To build yourself **39/6** Plus 1/6 P. & P.

ALL PARTS SOLD SEPARATELY.

Circuit diagram 1/6, free with kit.

All transistors guaranteed 100%

8 WATT PUSH-PULL AMPLIFIER

COMPLETE WITH CRYSTAL MIKE AND 8in. LOUDSPEAKER



A.C. mains 200/250 v. Size 10½in. × 6½in. × 2½in. Incorporating 4 valves. H.F. pen, 2 triodes, 2 output pens., and rectifier. For use with all makes and types of pick-up and mike. Negative feed-back. Two inputs, mike and gram., and controls for same. Separate controls for Bass and Treble lift. Response flat from 40 cycles to 15 Kc/s. ±1 db.; 4 db. down to 20 Kc/s. Output 8 watts at 5% total distortion. Noise level 40 db down, all hum. Output transformer tapped for 3 and 15 ohm speech coils. For use with 33rd, or L.P. records, musical instruments such as Guitars, etc.

£4.19.6 Plus P. & P 7/6.

Or £1 deposit, plus P. & P. 7/6 and 4 monthly payments of 23/-.

PORTABLE AMPLIFIER

On printed circuit for A.C. Mains 200/250 v Size 4in × 3in. with tone and volume control Valves: ECL82 and EZ80, 39/6. P & P. 2/6

RADIO AND T.V. COMPONENTS (ACTON) LTD.

23A, ACTON HIGH STREET, LONDON, W.3

GOODS NOT DESPATCHED OUTSIDE U.K. ALL ENQUIRIES S.A.E. TERMS OF BUSINESS C.W.O.

MICRO-MINIATURISATION

FOR BUILDING THE SMALLEST TRANSISTOR SUPERHET EVER

With these components you can build an unbelievably small six transistor superhet capable of receiving anything from 50 to 100 programmes under favourable conditions. Transistor arrangement—Convertor, 2 I.F., Diode, Audio Driver and two in P.P. to give up to 300 mW. Aerial coil and Ferrite Rod Aerial available very shortly.

- *FULL CIRCUIT DIAGRAMS AND CONSTRUCTIONAL DETAILS FREE*
- *ILLUSTRATIONS SHOW ACTUAL SIZE OF COMPONENTS*
- *TRADE ENQUIRIES INVITED*



2 GANGED TUNING CONDENSER

With built-in trimmers. Enclosed in polystyrene casing. Size 1in. sq. x $\frac{7}{16}$in. dp. **17'6**

I.F. TRANSFORMERS AND OSCILLATOR COIL

Set of 3 I.F.s and coil. Can size $\frac{1}{2}$in. high x $\frac{3}{8}$in. sq. Individually checked before leaving factory. Very high Q, better than 125. Complete set..... **21/-**

MATCHED DRIVER AND P.P. OUTPUT TRANSFORMERS

Driver—size $\frac{7}{16}$ x $\frac{7}{16}$ x $\frac{1}{2}$in.; Output—size $\frac{11}{16}$ x $\frac{7}{16}$ x $\frac{1}{2}$in. 300in. mW. Coloured leads.

Per pair matched **12/6**

HIGH GAUSS MINIATURE LOUDSPEAKER

1$\frac{1}{2}$in. diam. x $\frac{1}{2}$in. deep M.C. speaker. 9,500 Gauss ensures remarkably good quality. **25/-**

FROM STOCKISTS EVERYWHERE!

Details on application to:

TSL TECHNICAL SUPPLIERS LTD. HUDSON HOUSE, 63 Goldhawk Rd., London, W12 Telephone: SHEpherds Bush 2581 and 4794

UNIVERSAL ELECTRONICS

22-27, LISLE STREET, LEICESTER SQUARE LONDON, W.C.2. Tel: GERrard 8410 & 4447

Shop Hours: 9.30 a.m. to 6.0 p.m. OPEN ALL DAY SATURDAY *Thursday 9.30 a.m. to 1.0 p.m.*

LABORATORY RECONDITIONING & RECALIBRATION SERVICE

RCA, AR88D and LF Receivers, and all HF, VHF and UHF types

Completely reconditioned to original specification and supplied with complete Test Report and Guarantee for 12 months.

TEST EQUIPMENT

- Audio Signal Generators.
- Radio Frequency Generators.
- Wavemeters. Frequency meters.
- Voltmeters, ampmeters and multi-range instruments.
- Valve voltmeters, Micro-wave equipment.

AIRCRAFT INDUSTRY please note:

A laboratory test certificate can be issued in accordance with the current requirements of the Air Registration Board.

ESTIMATES GIVEN ON REQUEST

BARGAIN OFFERS *for the Constructor!*

TAPE RECORDER

Manufacturers' brand new current production offer. Latest 8-valve circuit based on Mullard's famous design. Magic eye level indicator. Volume and tone controls. T.C.C. printed circuit already wired. Only power pack and controls to assemble and wire. Valves EF86, ECC83 EL84, EM84 & EZ80. A sensitive quality recorder at special Unit Prices.

Wired printed circuit, power pack components, controls and knobs, etc. P. & P. 3/6. ..... £5 15 0

Set of 5 valves, as above. P. & P. 1/-. £2 5 0

B.S.R. Monardeck Tape Unit. P. & P. 4/6 ..... £9 19 6

Bargain reduction for complete kit. Carr. 5/- £16 10 0

Attractive two-tone Cabinet and 9in. x 5in. speaker to house above at special discount price. P. & P. 4/6 ..... £3 5 0

Illustrated Handbook with full details. Post free 2 6

Collaro Studio Tape Deck can be supplied with modified circuit as alternative for approx. (extra) £5 10 0

RECORD PLAYER BARGAINS Latest 4-speed models

NEW RELEASE by E.M.I.—4 speed Single Player Unit fitted with Latest stereo and monaural xtal cartridge and dual sapphire styli. Auto stop and start. A fidelity unit and bargain buy at only £6/19/6, carr. & ins. 3/6

SINGLE PLAYERS. B.S.R. (TUD) 90/-; COLLARO JUNIOR studio P.U. £4/10/-. AUTOCHANGERS. B.S.R. (UA8), £8/19/6; UA8 STEREO £7/19/6. B.S.R. (UA14) latest model, £7/19/6. COLLARO CONQUEST. £7/19/6. COLLARO CONTINENTAL £3/19/6.

BARGAINS GARRARD PLAYER UNITS

SINGLE PLAYERS
Model 4SP £6/17/6. Carr. 2/6.
Model TA Mk. 2, £7/19/6. Carr. 2/6.
Model 4HF, £18. Carr. 2/6.

AUTOCHANGERS. Model RC 210, With plug-in GC8 Head. 10 gns. Carr. 4/6. Transcription Auto Changer Model "A" just released £13/19/6. Carr. 5/-.

AUTO CHANGER RECORD PLAYER KIT

A.C. Supply 200v.-250v.

Attractive 2-tone cabinet—famous B.S.R. Monarch 4-speed, full mixer, 10-record gram unit. Full xtal pick-up with dual styli for Std. L.P. recordings. 2-valve amplifier with quality neg. feedback circuit, volume and tone controls. Fully isolated from mains by double-wound transformer, NOT the line chassis type as often offered in cheap commercial models.

A recommended buy while stocks last! Ready wired 2-valve Amplifier, complete with 6in. high flux speaker.

£3/19/6, P. & P. 2/6

Two-tone Cabinet 16in. x 13in. x 9in. £2/3/-, P. & P. 3/6

B.S.R. Monarch U.A.8 (180 v. model). £5/19/6, P. & P. 4/6

Complete 2 unit kit as special Autumn Bargain price. £12/12/6, Carr. 7/6

Simple assembly, a screwdriver only required.

TRANSISTORS BVA—1st Grade *New Reduced Prices*

MAZDA	MULLARD	G.E.C.
XA101 14/6	OC70 9/6	GET114 9/6
XA102 16/6	OC71 12/6	GET115 12/6
XA103 15/-	OCT72 15/-	Newmarket "Goodtop"
XA104 18/-	OC44 23/6	
XB102 10/-	OC45 21/-	V15/10P
XC101 10/6		15/-

Germanium Diodes OA70 2/9; OA81 3/6; GEX34 4/-.

NEW BOXED VALVES ALL GUARANTEED

1T4	9/-	EABC80	6/6	EZ81	7/6
1R5, 1S5	7/6	ECC84	9/6	MU14	9/-
3S4, 3V4	7/6	ECF80	9/6	PCC84	9/6
5Z4	9/-	ECL82	10/6	PCF80	9/6
6K7	5/-	ECL86	10/6	PCL83	12/6
6K8	7/6	EF80	9/-	PL81	12/6
6Q7	7/6	EF85	12/6	PL82	9/6
6V6	6/6	EF91	5/-	PL83	10/6
DAF96	9/-	EL41	9/6	PY80	7/6
DF96	9/-	EL84	8/6	PY81	9/6
DK96	9/-	EY51	9/6	PY82	7/6
DL96	9/-	EY86	10/-	UY3	12/6

SPECIAL PRICE PER SET
1R5, 1T4, 1S5 or 3S4 or 3V4, 25/-
DK96, DF96, DAF96, DL96, 35/-
6K8, 6K7, 6Q7, 6V6, 5Z4 or 6X5, 32/6.

JASON FM TUNER UNITS (87-105 Mcs)

Designer-approved kits of parts for these quality and highly popular tuners available as follows:—

STANDARD MODEL (FMT)—as previously extensively advertised. COMPLETE KIT. 5 gns., p. & p. 2/6. Set of 4 spec. valves. 20/-.

LATEST MODEL (FMT2)—attractively presented shelf mounting unit in enclosed Metal Cabinet with Built-in Power Supply. COMPLETE KIT. £7, p. & p. 3/6. Set of 5 spec. valves. 37/6.

MODEL JTV2. Self-powered Switch Tuned B1-B2-B3 AM/FM Unit. 5 preset stations AFC and AGC circuits. Complete Kit incl. ready-built and valved Turret Tuner. £12/19/6. p. & p. 3/6. 4 spec. valves. 32/6 extra.

MERCURY 2 similar to JTV2 less power pack. Complete Kit inc. ready-built turret unit 10 gns, p. & p. 2/6. 4 spec. valves 25/-.

NEW JASON COMPREHENSIVE F.M. HANDBOOK, 2/6 post free. 48hr. Alignment Service, 7/6, p. & p. 3/6.

MAINS TRANS. AND QUALITY OUTPUT TRANS. Mfd. in our own workshops to top grade spec. Fully interleaved and impregnated. Pkg. varies welcomed for small product runs prototypes or individual obs.

RECORDING TAPE BARGAINS

EMI 1st grade. Brand new sealed boxes

	Standard	Long Play
2in., 175ft.	7/-	250ft. 9/-
5in., 600ft.	19/-	850ft. 25/-
5½in., 850ft.	25/-	1,200ft. 31/6
7in., 1,200ft.	31/5	1,800ft. 45/-

SPARE REELS: Emitape, new, boxed. 3in. 3/-, 5in. 3/8, 5½in. 4/-, 7in. 4/6.

SPECIAL PURCHASE. Famous manufacturers, 1st grade tape, in sealed white boxes.

	Standard	Long Play
5in., 600ft.	15/-	850ft. 19/6
5½in. 850ft.	16/6	1,200ft. 22/6
7in. 1,200ft.	21/-	1,800ft. 32/6

Plastic Tape Reels, special offer. Manufacturers' surplus. 3in. 2/9, 5in. 3/-, 5½in. 3/3, 7in. 3/6.

TRANSISTOR PORTABLE

Famous manufacturer's 6 x 1 design based on Mullard and G.E.C. developments. Printed circuit, 6BVA 1st grade transistors, XA102, XA101 (2), OA70. XB102, XC101 (2) or equivalents. Quality components only supplied to ensure best results at attractive prices.

Set of 6 BVA Transistors and Diode. P. & P. 6d. .. 70/-

Printed Circuit, I.F.'s (3). Osc. coil. Driver Trans. and Ferrite rod aerial. P. & P. 1/6 51/6

Resistors, Condensers. Twin Gang and Volume control. P. & P. 1/6 ..... 37/6

7in. x 4in. Quality 35 ohm matching Speaker. P. & P. 1/6. ..... 25/-

Or

Complete KIT at special offer ONLY (post free) ..... £3/19/6.

Handbook and Circuit details, post free 2/-

KNOBS. Modern Continental types, walnut and ivory.
1in. dia. with GOLD RING 1/- ea. Ditto with GOLD CENTRE 1 3 ea.
1in. dia. with GOLD RING 9d. ea. Ditto with GOLD CENTRE 10d. ea.
LARGE STOCKS—SEND YOUR ENQUIRIES.

GET HTR ISOLATION TRANSFORMERS

New improved types, low capacity, small size and tag terminated A.C. 200/250 v. Secondaries 6¼, 4-25%, 4-50% BOOST for 2 v., 4 v., 6.3 v., 10.5 v., 12 v. or 13 v. tubes. 12/6 each. P. & P. 1/6.

COAX 80 ohm CABLE

Now only 6d. a yard.

High grade low loss Cellular Air Spaced Polythene—¼in. diam.—Famous mfr.

BARGAIN PRICES—SPECIAL LENGTHS.

20 yds.	9/- P. & P. 1/6
40 yds.	17/6 P. & P. 2/-
60 yds.	25/- P. & P. 3/-

Coax Plugs, 1/-; Coax Sockets, 1/-; Couplers, 1/6; Cable End Sockets, 1/6 Outlet Boxes, 4/6.

RE-GUNNED TV TUBES NEW REDUCED PRICES

. . . and now 12 months' guarantee!

All tubes rebuilt with new heater, cathode and gun assembly — reconditioned virtually as new.

12in. £5, 14in. £5/10/-, 17in. £6, etc.

10/- part exchange allowance on old tube

Carr. and ins. 10/-. Comprehensive stocks—quick delivery.

CONDENSERS—Silver Mica. All prof. values, 2 pf. to 1,000 pf., 6d. each. Ditto ceramics 9d. each. Tubulars 450 v. T.C.C. etc., .001 mfd.-01 and .1 250v., 6d. each. .05-.1/500v.. 1- each. .25 Hunts 1/6. 5 T.C.C. 1/6. .001 6kv 5/6. .001 20 kv. 9/6.

RESISTORS—FULL RANGE 10 ohms—10 megohms 20%, ½ w and ¼ w. 2d., ½ w. 5d. (Midget type modern rating), 1 w. 6d., 2 w. 9d., 10% Hi-Stab, ½ w., 5d., ¼ w., 7d., 1% ½ w. 9d., 1% Hi-STAB. ½ w., 1/6 (10-100 ohms 2/-).

PRE-SET W.W POTS. T/V type, 25 ohms—50 K ohms 3/-. 50K—2 Meg. (Carbon 2/-).

SPEAKER FRET—Expanded Bronze anodised metal 8 x 5in., 2/3; 12 x 8in., 3/-; 12 x 12in. 4/6; 12 x 16in., 6/-; 24 x 12in 9/-; 36 x 12in. 13/6, etc., etc.

TYGAN FRET (Contemporary rat.), 12 x 12in. 2/-; 12 x 16in., 2/6; 15 x 24in. 4/-; etc

LOUDSPEAKERS—P.M. 3 ohms, 2½in. Elac. 17/6; 3½in. Goodmans 18/6; 5in Rola, 17/6; 6in. Elac. 13/6; 7 x 4in. Goodmans Elliptical 18/6; 8in. Rola, 20/-; 10in R. and A. 25/-; 10in. W.B.-HF1012, 95/-; 12in. Plessey 15 ohms with 6/4in. Tweeter and Cross Over Filter, 97/6.

Electrolytics All Types New Stock

TUBULAR	CAN TYPES
25/25 v. 50/12 v. 1/9	8+8/450 v. 4/6
50/50 v. 100/25v. 2/-	32+32/275 v. 4/6
8/450 v. 4/750 v. 2/3	50+50/350 v. 6/-
16+16/450 v. 3/6	60+250/275 v. 12/6
32+32/450 v. 6/6	100+200/275 v. 12/6

Comprehensive range in stock.

VOLUME CONTROLS—5K—2 Megohms. ALL LONG SPINDLES. MIDGET TYPE 1¼in. diam. Quad 1 yr. LOG or LIN. Ratios less 6w., 3/-. D.P. 8w., 4/6. Twin gang stereo controls less 8w., 8/6. D.P. 8w. 9/-.

7 VALVE AM/FM RADIOGRAM CHASSIS

Valve Line-up: ECC85, ECH81, EF89, EABC80, EL84, EM81, EZ80.



Three Waveband and Switched Gram positions. Med. 200-500 m., Long 1,000-2,000 m., VHF/FM 88-95 Mc/s. Philips Cont nental Tunine insert with permeability tuning on FM and combined AM/FM IF transformers. 460 Kc/s. and 10.7 Mc/s. Dust core tunins all coils. Latest circuitry including AVC and Neg. Feedback. Three watt output. Sensitivity and reproduction of a very high standard. Chassis size 13½ x 6½in. Height 7½in. Edge illuminated glass dial 11½ x 3½in. Vertica pointer. Horizontal station names. Gold on brown background. A.C. 200/250 v. operation. Magic-eye tuning.

Aligned and tested ready for use. **£13 . 10 . 0** *Carr. & ins. 5/-.*

Complete with 4 Knobs—walnut or ivory to choice. Indoor FM aerial 2/6 extra. Three ohm P.M. speaker only required. Recommended quality speakers.

10in. Rola (Heavy Duty) 30/-

8in. Goodmans special cone 21/6

Post & Pkg. 1/6.

As previously announced fresh supplies are now being received, but we regret some slight delay may be experienced in fulfilling orders for this popular item.

ONLY A FEW ITEMS ARE LISTED FROM OUR COMPREHENSIVE STOCK. WRITE NOW FOR FULL BARGAIN LISTS, 3d.

Terms: C.W.O. or C.O.D., post and packing up to ½lb. 7d.; 1lb. 1/1; 3lb. 1/6; 5lb. 2/-; 10lb. 2/9.

2 WAVEBAND CAR RADIO KIT

12v. operation Med. & Long Waves

Recommended Buy

Modern development of the famous Brimar Hybrid vibratorless car radio circuit. Five latest type Brimar low voltage valves and power transistor. R.F. stage and permeability realigned Cyldon Tuner Unit provide extremely good sensitivity and signal noise ratio. Printed circuit for easy construction and 7 x 4in. elliptical speaker for fidelity output. Self-contained in neat metal cabinet 8 x 7 x 9½in. with attractive calibrated dial. Speaker and power transistor stage mounted separately approx. 8 x 5 x 3in.

Complete Kit Bargain Price £12.19.6 P&P 3/6.

Instruction booklet and parts list available. 2/6 post free.

TRS

RADIO COMPONENT SPECIALISTS

70 BRIGSTOCK RD., THORNTON HEATH, SURREY

Established 1946.

Tel.: THO 2188. Hours: 9 a.m.—6 p.m. 1 p.m. Wednesday.

H

Get Finest Value from IRONGATE—England's Leading Equipment Wholesalers
Bulk Buying means LOWEST PRICES. All Equipment is in TIP-TOP condition

LATEST miniature

EXPORT ONLY

WALKIE TALKIE

"88" sets—just released by Ministry of Supply. Produced to exacting specifications by leading manufacturers E. K. Cole & Co. this Transmitter/Receiver weighs only 5½lb. (approx.) and measures 3½in. x 5½in. x 9½in. It is a 4 frequency channel set, crystal controlled, 38-40/40-42 Mc/s., and operates from a Standard Dry Battery—HT/LT. 94/1. 3 v. (i.e. Ruben Mallory Type 1). 14 of the current series of B7G valves are employed: 1-3A4, 6-1L4, 4-1T4, 1-1S5. 2-1A3. Each set is in first class condition.

SUPPLIED COMPLETE WITH CRYSTALS. Accessories can be supplied to order at extra cost.

Only **£10** each.

Special quotations for quantities up to 3000 sets. "22" SETS ALSO—300 available only. New condition £10 each.

UNIQUE OFFER!

World Famous TELEPHONES "F" TYPE in Attractive Case

£7-10-0 per pair carr. 9/-

The best portable telephone ever made. Original cost £40! Range up to 5 miles. Ideal for FACTORIES, BUILDING SITES, FARMS, OFFICES, 2 perfect case sets with batteries, 100ft. cable, etc.

D3 STRANDED TELEPHONE CABLE. New Mile Drum 85/-. Carr. 17/6.

CONSTANT VOLTAGE TRANSFORMERS

FERRANTI 7½-KVA MOVING COIL Stabilized output voltage in the range 200-250 v. Plug-board tappings. The selected output voltage is constant with ±1% at all loads 0 to 30/37½ amps. when the supply voltage is varying over the range +8% to −12%.

★ Frequency compensated 45-55 and 54-66c/s.
★ Excellent output wave-form.
★ Can be used as a variable transformer.
★ Unused. Complete with spares and instruction book at a fraction of the normal cost.

£65

★ A.C. MAINS STABILIZER. ONLY

AUTO TRANSFORMERS

3KVA Air Cooled (100% under-rated).
GUARANTEED 230/250 tapped. 12 amps.
6 KVA 105/120 tapped 28.5 amps
Made by well-known manufacturer and housed in strong metal case. Weight: 2 cwt.
Brand new, in original maker's case.

PRICE **£15 . 0 . 0** Carr. 25/-.

750,000 YARDS!!

SCREENED WIRE FLEX FOR ONLY 2d. per yd.

For immediate Delivery—far below cost. Specification: Close braided 14/.0048in. Covered .024 p.v.c. Tinned Copper. Screened. Assorted colours. Applications: Microphone leads, pick-up leads, etc. ON MAKER'S REELS.
220 yd. REELS (min. quantity) **36/8.** P. & P. 6/-.
TEN REELS £17/. Carr. Paid.

VARIABLE TRANSFORMERS

Brand New

OUTPUT (1.3KVA.) Completely Variable 0 to 250 volts 5 amps.
INPUT 230 volts, 50/60~
A SHROUDED FULLY VARIABLE TRANSFORMER FOR BENCH OR PANEL MOUNTING.
SIZE:—APPROXIMATELY 6" CUBE.
WEIGHT:—APPROXIMATELY 13 LB.
PRICE:—RIDICULOUS ONLY—**£9.0.0**
SUPPLIED NEW AND BOXED.
ALSO 10 amps. **£18.5.0** AND 20 amps. **£32.10.0**

HEAVY DUTY 20 AMP. L.T. SUPPLY UNIT

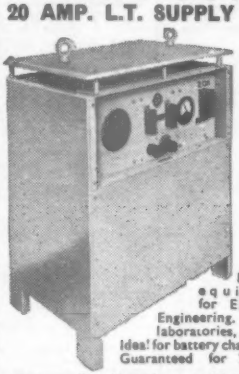

by S.T.C.

Normal cost over £100

Essential equipment for Electronic Engineering, research laboratories, schools. Ideal for battery charging etc. Guaranteed for 20 amps.

Output: D.C. Variable up to 20 amps. and 24 v. or trickle charge 125/350/700 ampere hours.
Input: A.C. 100/260 volts 45/65 cycles.
Size: 16 x 24 x 32in. high.

In attractive Grey Cabinet. **£22-10-0** ex Warehouse

(Circ. diags. and instru. loaned for 10/- deposit.)

A COMPLETE Ex Govt.

PUBLIC ADDRESS SYSTEM 15 GNS

FOR OFFICES, FACTORIES WAREHOUSES & CARS CARR 30/-

Set by TRUVOX, etc. Comprises: Amplifier, four Loudspeakers, Heavy duty mic., Leads etc. 6 or 12 v. D.C.

AERIAL MASTS

IMPROVED TYPE 50 MK.II

36ft HIGH

Kits comprise—six 2½in. dia. Tubular Steel Sections of 6ft. length, top-section and base Pickets, Guys and Fittings. YOU can purchase this normally expensive MAST for a fraction of its cost. Please add £1 for (returnable) wooden carrying case. The MAST is particularly suitable to take aerials for Tx., Rx. P.M. and TV (especially COMMERCIAL) and has many other uses. Extra 6ft. sections can be supplied at 17/6 per section. Carr. 15/6.

£8.10.0 only

U.S.A. Type 45ft. TELECOM AERIAL MAST. (7 sections. 6ft. 8in. x 2½in., guys, etc.). This entirely complete set in carrying case 12½ Gns. Carr. 17/6. Or 2 sets for £25. Carr. extra. *British Manufacture only.*

ARMY TYPE 32FT. MASTS similar to above but 10 lin. screw-sections, suitable for permanent lightweight installation. Kit in canvas bag, £5/15/-. Carr. 7/6.

Limited Quantity
36ft. TELESCOPE MASTS

Finest quality brass. Non-rusting. Base diameter 2½in. Complete with hand-winding winch for easy, rapid extension; and cable-wire bracing stays. One of the best masts ever produced. Winds down to 9ft. **£35** each Carr. £1/10.

Irongate (M.O.) COMPANY

Dept. (W14), 2, IRONGATE WHARF ROAD, PRAED STREET, LONDON W.2
PADDINGTON 2231/2/3

Electronics (FLEET ST) Ltd

DEPT. B
152/3 FLEET ST., LONDON, E.C.4
Telephone. FLE 2633
Business hours: Weekdays 9-6. Saturdays 9-1

STOCKISTS FOR THE FOLLOWING

AMPLIFIERS, STEREO AND MONAURAL, BY:		V.H.F. TUNERS BY:		HI-FI SPEAKERS BY:	
VERDIK	QUAD	ARMSTRONG	T.S.L.	GOODMAN	W.B.
ARMSTRONG	LEAK	LEAK	DULCI	PLESSEY	T.S.L.
ROGERS	W.B.	QUAD	ROGERS, etc.	WHARFEDALE	G.C.
DULCI	etc.			LOWENZ	etc.

THE NEW JASON range for CONSTRUCTORS

JTV2 Tuner completely assembled ready for use £25/7/-.

FMTI FM Tuner. In kit form for cabinet mounting. One of the most popular tuners. Up to 60 miles normal range. Including valves £6/15/-. Power pack kit £2/14/9.

FMT2. In kit form with free standing case with power pack. Including valves £8/19/6.

FMT3. Variable tuner 88-108 mc/s. Variable AFC control dual limiters, approx. 80 mile range, including valves £10/19/6.

JTV2 Tuner self powered switched tuner for FM and TV sound. Both BBC and ITA as required, including valves £13/19/6.

MERCURY II switched FM/TV sound tuner in kit form for building into cabinet, including valves, £10/10/-. Power pack kit, £2/14/9.

EVEREST 6 s/het transistor portable, p/pull output, high quality speaker, matched transistors, neatly designed case, aerial input for use in car, complete kit £13/19/9.

EVEREST 7 transistor s/het portable, p/pull output, high quality speaker extra RF stage, neatly designed cabinet, aerial input for use in car all components complete £15/18/9. 2/6 post and pkg. on all the above, S.A.E. for details.

DECCA PORTABLE AMPLIFIER. As supplied in famous DECCAMATIC III. Complete with small cream knobs. Full range tone and volume controls. Employs ECL82 valve, Metal Rectifier. Size 3 x 3½ x 8in. Only 59/6 plus 2/6 P. & P.

SPECIAL CELESTION 8 x 6in. elliptical high flux loudspeaker to fit. 30/- plus 1/- P. & P

Limited number of this stereo offer

Compact stereo amplifier, 3 watts each channel, using 2-ECL82, 1-EZ80, separate balance and tone controls, volume and on/off switch, channel reverse switch, designed for crystal p/up, separate power pack. Including 2-6½ P.M. speakers in cabinets, finished imitation Rexine. Complete and ready for use. £8/19/6. P. & P. 10/-.

BRAND NEW AND GUARANTEED

7in. reels of 1,200ft. P.V.C. base tape, 21/-, plus 1/6 post and pkg.
5in. reels of 600ft. P.V.C. base tape, 14/6, plus 1/6 post and pkg.
4in. reels of 300ft. P.V.C. base tape, 9/6, plus 1/- post and pkg.
7in. reels of 1,800ft. L.P. P.V.C. base tape, 32/6, plus 1/6 post and pkg.
5in. reels of 1,200ft. P.V.C. base tape, 25/-, plus 1/6 post and pkg.
Brand new E.M.I. 7in. take-up spools in polythene bag, 3/9 each post free, 6 for 20/-.

EMISCOPE 3/18 TV TUBES. 12in. round, 8v. heaters, 3 A. current. Final anode 55, deflection angle 50°. Aluminized at the ridiculous price of 35/-, plus crating and carriage 12/6.

BUY NOW!!!

Definitely the last of the remaining stocks of the

AVANTIC BEAM-ECHO HI-FI EQUIPMENT

SP21 STEREO PRE-AMP CONTROL UNIT

A twin channel pre-amp control unit, has 6 inputs for each channel **INPUT SENSITIVITY** for 250 M/V or 1.5V output **TUNER** 100 and 250 M/V Tape 100 M/V Aux 250 M/V. **PICK-UP** 5 and 50 M/V Frequency response: 40 c/s. to 15 Kc/s. **TAPE OUTPUT** 50 M/V., continuously variable bass and treble controls, loudness control and stereo balance control. Power required 6.3 V. at 1.3 amp A.C 350 v at 5 M/A D.C. Will match any h.-fi amplifier. Manufacturer's price £28/10/- **OUR PRICE** now **£16/19/6.** Carr and packing 7/6.

AVANTIC PL6-21

High quality monaural power amplifier and pre-amp compactly housed and suitable for shelf mounting or cabinet. Two EL84, three EF86, one ECC83, one EZ81. 30 watts peak; speaker impedance, 4, 8 or 16 ohms. Sensitivity: 4M/V on pickup 3M/V on tape, 100M/V on tuner Intermod. distortion 1% at 10W equivalent Sinewave output. Maker's price £28/10/-. **OUR PRICE 19 gns.** Post and packing 7/6.

AVANTIC SPA11 Stereo Amplifier

A twin channel amplifier and pre-amp., push-pull output, 10W peak each channel, rumble filter speaker impedance 4, 8 and 16 ohms Tape output: 100M/V Continuously variable treble and bass, stereo balance control. Input sensitivity: for 7W. 100M/V radio: 100M/V tape; 650M/V pickup. Manufacturer's price 28 gns. **OUR PRICE 19 gns.** Post and packing 7/6.

STEP II stereo pick up pre-amp. unit £4/14/6. P & P. 2/6.

STEP 21 stereo tape pre-amp., £4/14/6. P. & P. 2/6.

ANOTHER BARGAIN
The Famous VERDIKSI Tape Recorder as supplied under Famous Name at 50 gns.
A high quality recorder using 7in. spools operating at 3¾ and 7½ i.ps., twin track, record level indicator, fastwind and rewind, tone control, mic., radio and gram. input sockets, ext. speaker, rev counter, beautifully designed, dimensions 15½ x 14½ x 5½ in two-tone grey finish, complete with external mic., 1-7in. reel of tape and empty spool. A.C. 200/250 volts. **Our Price 29 gns.** Carriage and crating 25/-.

THE VERDIK "QUALITY TEN"

10 watt push-pull ultra linear hi-fi amplifier with pre-amp. Mic., radio, gram and tape inputs, bass and treble controls. Beautifully finished Control panel in gold lettering on grey green, Fully guaranteed. Original price 23 gns. **Our price £14/19/6.** P. & P. 7/6.

HI-FIDELITY TAPE HEADS

Made by famous manufacturer. Brand new. Upper or lower track. record/play-back, high impedance giving up to 12,000 c.p.s. at 7½ I.P.S. output 5 m/volts at 1 KC at 7½ I.P.S. Erase heads low impedance.
Only 39/6 per pair. Post 1/-. State upper or lower track.

TAPE DECK OFFERS

B.S.R. MONARCH DECK uses 5½ tape spools, twin track. Single speed, 3¾ I.P.S. at £8/19/6. Post & Pkg. 5/-.
Suitable tape amplifier for B.S.R. deck. Completely assembled, 3 watt o/put, valve line up ECC83, ECL82 EL84, meta rectifier, magic eye level indicator. frequency response 60 c/s—5000 c/s. inputs for radio gram, mic., superimpose, ideal for monitoring impedance, tone control, volume control Dimensions 11¼in. x 4in. deep x 6¼in. high. **OUR PRICE £9/15/0.** P. & P. 3/6.

FOR TAPE RECORDER CONSTRUCTORS

The new Collaro studio tape deck, using 3 motors, 5 speeds at 1⅞, 3¾ and 7½ I.P.S., will take 7in. spools, push button controls. £12/19/6, 5/- post and pkg. Well designed tape recorder amplifier (not a kit) for the studio deck, incorporating Mic/Gram/Radio inputs, ext. loudspeaker, superimposing switch, with matching knobs, separately mounted mains transformer Frequency response 60-10K/c 3DB at 7.5 I.P.S., magic eye level indicator Using ECC83, ECL82 and EM85 and metal rectifier. Assembly instructions. The 2 units, £25/10/- complete. Crating and insurance, 17/6. Suitable Acos mic 40 for above, 25/-.
A repeat of our previous popular offer. The Collaro Mk. IV tape transcriptor tape deck, £17/10/-, Crating and carr 11/6

The new **ARMSTRONG TAPE PRE-AMPLIFIER PA80-3**, high quality unit, can be used with any Hi-Fi equipment, will operate most tape decks, equalisation for tape speeds 3¾, 7½, 15I.P.S., can play prerecorded tapes. Valve line up, EF86, ECC82, EM81 and OA81 diode, freq. response, 30-17000 C.P.S., at 15 I.P.S. 40-13000 C.P.S. at 7½ I.P.S. Mic/radio/gram inputs. 20 watts maximum power required, attractive control panel. **Complete 16 gns.** 3/6 post & pkg. Power pack £2/19/6 extra.

BRAND NEW TV TUBES CHEAPER THAN REBUILDS



All brand new in famous maker's cartons. (1) 17in. rectangular aluminized 6.3 HRTS. .3 A. current; max. anode voltage 16 kV. Usual price £17/5/-. **OUR PRICE £7/19/6.** Crating and carr. 15/-.
(2) 14in. rectangular Tube, 6.3 heaters; .3 amp. current; max. anode 14 kV; ion trap; external conducting coating; B12A base. £7/9/6. Crating and carriage 12/6.
(3) Ferranti 9in. Tube, round white fluorescence, 4 v. heater, max. anode voltage 7 kV. **OUR PRICE 25/-.** Crating and carr. 11/6.

A SNIP FOR CONSTRUCTORS

Build the Labgear Audio Output meter. Two ranges—25 milliwatts to 1 watt, 1 watt to 100 watts. Accuracy 5W. Input impedance 3, 15 and 600 ohms. Printed circuit. All components including 0-1MA moving coil meter and silver hammertone enamel case. Kit complete with instructions 59/6, post and pkg. 1/6.

FOR STEREO ENTHUSIASTS

The new Eagle Stereo balancer audio watt meter will balance your stereo speaker system, compensating for variation of acoustics and unmatched speakers. Ideal for monitoring audio outputs, suitable as a recording level indicator for your tape recorder. an improved advantage over "magic eyes." The AUDIO WATT METER assists in aligning AM & FM receiver, meter is calibrated for 0-30 watts for both 3 and 15 impedances. Cabinet in grey. 7 Gns. P.& P. 2/6.

SAMSON'S SURPLUS STORES LTD.

LONDON'S GREATEST DEALERS IN RADIO AND ELECTRONIC EQUIPMENT

All ratings tropical and in perfect condition.

No. 1. Pri. 230 v. Sec. tapped 11, 11.5, 12, 12.6 v., 100 amps. £9/15/-. Carr. 10/-.

No. 2. Pri. 230 v. Sec. tapped 28, 29, 30, 31 v. 21 amps., £4/19/6. Carr. 7/6.

No. 3. Pri. 240 v. Sec. 6-12 v. 10 amps. 45/-. Carr. 4/-.

No. 4. Pri. 100-240 v. Sec. two separate windings. Tapped 15, 16, 17 v. 4 amps. 37/6. Carr. 4/-.

No. 5. Pri. 200-240 v. Sec. 6.3 v. 15 amps., 25/-. P.P. 3/6.

No. 6. Pri. 220-240 v. Sec. four separate windings 3 x 5 v. C.T. 4 amps., 4 v. 4 amps. Potted type. 32/6. P.P. 3/6.

No. 7. Pri. 220-240 v. Sec. three separate windings, 6.3 v. 4 amps. C.T., 6.3 v. 4 amps. C.T., 6.3 v. 4 amps., 29/6. P.P. 3/6.

No. 8. Pri. 230 v. Sec. 6.3 v. 5 amps., 6.3 v. 1 amp. and tapped H.T. winding, 65 v., 130 v., 195 v., 85 mA., 15/-. P.P. 2/6.

No. 9. Pri. 220-240 v. Sec. tapped 9 v. 15 v. 4 amps., 22/6. P.P. 3/6.

No. 10. Pri. 220-240 v. Sec. tapped, 12, 20, 24 v. 2 amps., 22/6. P.P. 3/6.

No. 11. Pri. 200-240 v. Sec. tapped 48, 56, 60 v. 1 amp., 27/6. P.P. 3/6.

No. 12. Pri 200-240 v. Sec. tapped 3, 5, 12, 20, 30 v. 2 amps., 25/-. P.P. 3/6.

No. 13. Pri. 230 v. Sec. 10 v. C.T. 10 amps. and 4 v. 7 amps., 32/6. P.P. 3/6.

No. 14. Pri. 200-240 v. Sec. tapped 30, 32, 34, 36 v. 5 amps., 57/6. Carr. 4/-.

No. 15. Pri. 200-240 v. Sec. tapped 10, 17, 18 v. 10 amps., 57/6. Carr. 4/-.

No. 16. Pri. 230 v. 50 v. 2 a., 6.3 v. 5 a., 6.3 v. 2 a., 6.3 v. 1 a., 6.3 v. 0.6 a., 5 v. 3 a., 5 v. 5.6 a. Potted type. 39/6. Carr. 5/-.

No. 17. Pri. 240 v. Sec. tapped 6 v.-12 v., 20 amps., 69/6. Carr. 4/-.

No. 18. Pri. 240 v. Sec. tapped 12 v.-18 v., 10 amps. 52/6.

No. 19. Pri. 230 v. Sec. 4.2 v. + 4.2 v. 10 amps., 25/-. P.P. 3/6.

No. 20. Pri. 230 v. Sec. 24 v. 30 amps., £8/10/-. Carr. 5/-.

No. 21. Pri. 230 v. Sec. 20 v. 20 amps., £4/5/-. Carr. 5/-.

No. 22. Pri. 230 v. Sec. 20 v. 30 amps., £6/15/-. Carr. 5/-.

SPECIAL OFFER: PARMEKO L.T. TRANSFORMERS. Pri. 230 v. Sec. 24 v. 2 amps. Tropically rated, completely enclosed in metal cases with fitted fuses and neon indicator. Brand new in maker's cartons. Fraction of cost. 25/-. P.P. 3/6.

SPECIAL OFFER: LATEST A.M. RELEASE. Isolation Transformers. Pri. tapped 100, 200, 220, 240 v. Sec. 225 v. 1.1 Amps. Tropically rated. Guaranteed £3/5/-. Carr 7/6.

WESTINGHOUSE DOUBLE WOUND STEP DOWN TRANSFORMERS. 250-230-210 v.-110 v. Tropically rated at 400 watts. But guaranteed to give 600 watts. Brand new. £5/10/-. Carr. 7/6.

SPECIAL OFFER OF H.T. TRANSFORMERS. Oil filled potted. By London Sperry. Pri. tapped 100-250 v. Sec. 450-0-450 v. 105 mA. 5 v. 3 A., 6.3 v. 2 A., 6.3 v. 1.5 A. Brand new 35/-. P.P. 5/-.

BRITISH TYPES. 30 mfd., 400 v. wkg., 26 mfd., 500 v. wkg., 20 mfd., 500 v. wkg., 15/- each. 8 mfd., 1,500 v. wkg., 12/6. 10 mfd., 450 v. wkg., 8/6. 8 mfd. 500 v. wkg. sub chassis mounting, 8/6. 8 mfd., 250 v. wkg., 5/6. 4 mfd., 1,000 v. wkg., 5/-. 4 mfd., 800 v. wkg., 4/6. 2 mfd., 1,000 v. wkg., 3/9. 0-5 mfd., 2,000 v. wkg. 4/6.

AMERICAN TYPES. 45 mfd., 200 v. wkg., 10/6. 16 mfd., 400 v wkg., 8/6. 10 mfd., 1,500 v. wkg., 15/6. 10 mfd., 600 v. wkg., 10/6. 8 mfd., 1,500 v. wkg. 6 mfd., 330 v. wkg., A.C., 7/6. Please add 2/- postage on all capacitors.

AMERICAN HIGH VOLTAGE CAPACITORS. 2 mfd., 10,000 volts wkg., £8/10/-. Carr. 7/6. 0.25 mfd., 25,000 volts wkg., £4/10/-. Carr. 7/6. Supplied brand new in maker's cartons at a fraction of original price.

Manufactured by Crompton Parkinson MI 50 cycles, supplied new and guaranteed, 32/6. P.P. 3/6.

BRAND NEW A.M. A.C. VOLTMETERS. M.I. 2½in. flush 0-300 volts, 50 cycles, 32/6, P.P. 2/6. Rectifier Type 2,000 ohms per volt. 2½in. flush 0-2 volts, A.C. 50-10,000 cycles, 30/-, P.P. 2/6.

M.C. 2½in. flush, 0-20 microamps, scaled minus 15—plus 1 decibels, 57/6. Rectifier unit suitable for audio 3/6.

RECTANGULAR 500 MICROAMMETERS. 5 x 4in. Panel mounting. Scaled 0-250, 59/6. P.P. 2/6.

CROMPTON PARKINSON 4½in. A.C. MI AMMETERS. 0-30 amps. flush mounting, 27/6. P.P. 3/6. Supplied brand new.

WESTINGHOUSE HEAVY DUTY L.T. SUPPLY UNITS TYPE 115. A.C. input 200-250 volts. D.C. Output 26 amps. into a 24 volt (nominal) battery. Rating continuous. Max. ambient temp. 35 deg. C. Completely smoothed and stabilised. Built in metal case approx. size 17 x 21 x 19 inches. With fitted fuses On/Off switch. Reconditioned as new. £31/10/- ex warehouse. Original makers' price over £100.

DOUBLE READING, MOVING COIL. 0-3 v. and 0-30 v. D.C. Centre zero. Offered at a fraction of maker's price. 12/6. P.P. 2/-.

Weight 2.1 oz. Motor dimensions 1⅝in. long, 1⅛in. dia. Spindle 0.4in. long. .077in. dia. Consumption 0.72 watts off load. 7.68 watts on load. Speed 7,000 r.p.m. Switch. Centre off reverse by switching either side. General specification. These motors have a tremendous power-weight ratio, are extremely efficient. Can be used on 6 volts without great loss in power. Precision built in polythene housing. Self lubricating. With sintered bronze bearings. Easily mounted. Supplied Brand new and Guaranteed, 15/6. P.P. 1/6. Special price for quantities over 50.

A.M.L.T. SMOOTHING CHOKES. Resistance ½ ohm. Ideal for smoothing 12-24 v. D.C. 5 amps. Tropically rated. Brand new, 17/6, P.P. 4/-.

SPECIAL PURCHASE!!

NIFE ALKALINE BATTERIES

6 VOLT 75 A.H. TYPE LR7

SUITABLE FOR ENGINE STARTING

Five 1.2 v. cells crated and connected to give 6 v. Brand new and fully guaranteed. Size of crate 15¼in. x 12in. x 6¼in. £7/10/-. Carr. 15/-.

HOOVER HEAVY DUTY BLOWERS. A.C. 220-240 v. Inlet 6in. dia. Outlet 7¼ x 6¼in. Motor spec. 1/6th h.p. Cap. start, 950 r.p.m., £8/15/-. Carr. 15/-.

HEAVY DUTY AUTO TRANSFORMERS. Tropically rated at 5 kVA. Tapped 250, 240, 230, 220, 120, 115, 110, 105 volts. Completely enclosed in metal case. Size 23 x 14 x 11in. Weight approx. 2 cwt. Brand new, £15. Ex-warehouse.

We have London's largest selection of Auto Transformers from 60 watts to 15 kVA. Available from stock. Let us know your requirements.

AMERICAN HEAVY DUTY AUTO TRANSFORMERS. 7½ kVA. 115-230 v. "C" core winding. Completely enclosed £12/10/-, ex-warehouse.

BRAND NEW ARON 50 AMP. CHECK METERS. 200-250 volts A.C. single phase, 37/6.

A.C. ELECTRIC CHECK METERS. 200-250 v. 30 amp., 22/6. 10 amp. 19/6, carr. 3/6. Reconditioned and guaranteed.

HEAVY DUTY FOOT SWITCHES. Press to break, size of pedal 4½ x 3½ inches. 17/6. P.P. 3/6.

SANGAMO SYNCHRONOUS MOTORS A.C. 200-250 v. 1¼in. dia., 7/6. P.P. 1/6.

S.T.C. F.W. RECTIFIERS. Brand new. Max. A.C. input 75 volts. Output 18 amps. £7/10/-. Carr. 5/-. Max. A.C. input 80 v. Output 3 amps., £3/2/6. Carr. 4/-.

24 v. AIRCRAFT PUMPS AND AIR BLOWERS AVAILABLE FROM STOCK. PUMPS FROM 35/-. BLOWERS FROM 17/6.

GUNFIRE ELECTRIC TIME SWITCHES. A.C. 200-250 volt. 20 amp. contacts. Brand new. 69/6. P.P. 3/6.

SPECIAL OFFER! AMERICAN POTTED OIL FILLED LF CHOKES. 8 H. 800 mA. 200Ω 7,000 v. RMS test 45/- carr. 7/6. 18 H. 200 mA. 175Ω, 41,000 v. RMS test 45/- carr. 7/6. 8 H. 300 mA. 90Ω, 7,000 v. RMS test 15/-, carr. 4/-. 10 H. 250 mA. 135Ω, 2,000 v. RMS test 12/6, P.P. 3/6.

169-171 EDGWARE RD., LONDON, W.2. Telephone PAD 7851, AMB 5125

VALVES

Brand new, individually checked and guaranteed

AC/DD	2/6	EI232	5/6	EZ40	7/-	PL36	10/6	VU111	3/3	6F5G	5/6
AC/P	4/6	EI323	25/-	EZ80	6/6	PL81	7/6	VU120	3/-	6F6G	4/-
AC/PI	2/6	EI524	6/6	FW4/500	6/6	PL81	9/-	VU133A	3/-	6F8G	6/6
ACSPENDD	4/-	EA50	1/6	GZ32	9/-	PL82	8/-	W21 4 pin	7/-	6F12	4/6
AC6/PEN	5/-	EAC91	4/6	H30	5/-	PL83	7/9	W31	7/-	6G6G	3/-
AC/SP3	4/6	EB34	1/6	H63	3/6	PM4DX	3/-	Y63	5/-	6HA7	4/3
AL60	6/-	EB91	3/9	HL2K	3/-	PM24A	4/-	Y66	8/-	6H6M	2/-
AP4	4/-	EBC33	5/-	HL23	6/-	PT25H	7/6	Z31	6/-	6H6GT	1/9
AR8	5/-	EBC91	3/9	KBC32	5/-	PX4	19/-	IA3	3/-	6J5	3/6
ARDD5	2/-	EC52	3/-	KF35	5/-	PY81	7/-	IA5GT	5/-	6J7	7/6
ARP3	3/-	ECC32	4/-	KT2	4/-	PY82	8/-	IC5GT	7/6	6J5G	3/-
ARP4	3/6	ECC81	5/6	KT31	8/-	QP21	6/-	ID8GT	6/-	6J6	4/3
ARP12	2/9	ECC82	6/6	KT32	8/-	QP25	5/3	IE7GT	7/6	6K6GT	6/6
ARP21	5/6	ECC83	7/-	KT33c	6/3	QQVO 6-40	45/-	IL4	3/6	6K7G	2/3
ARP24	3/6	ECC84	7/-	KT44	6/3	QS75/20	6/9	ILD5	3/6	6K7GT	4/9
ARP34	4/6	ECC85	8/-	KT63	6/-	QS95/10	6/9	IR5	6/-	6K8G	5/9
ARTH2	7/-	ECC91	4/-	KT66	11/-	QS108/45	6/9	IS5	5/9	6K8GT	8/3
ATP4	2/9	ECL80	8/-	KT241	9/-	QS150/15	6/9	IT4	4/-	6K8M	8/6
ATP7	5/6	EF22	7/3	KTW62	7/6	R3	8/-	2A3	8/-	6L5G	6/-
AU1	5/-	EF32	5/-	KTW63	6/6	R10	12/6	2A5	8/-	6L6	9/-
AU4	5/-	EF36	3/6	L30	4/-	REL21	25/-	2A6	7/-	6L6G	6/6
AW3	4/-	EF37A	6/-	LP2	3/6	RK34	2/6	2C34	2/6	6L34	4/6
AZ	3/6	EF39	4/3	MH4	3/6	RL37	3/6	2D4A	4/-	6N7G	5/9
BL63	6/-	EF50	2/6	MHL4	3/9	SP2	4/-	2X2	4/-	6N7GT	6/-
BT45	40/-	EF52	5/-	ML4	4/-	SP4B	7/6	3A4	5/-	6Q7G	6/-
BT9B	40/-	EF54	3/3	ML6	6/-	SP13C	4/6	3B24	3/-	6R7G	6/-
CY31	11/6	EF55	6/-	MPT42	5/3	SP41	2/6	3E29		6R7GT	8/-
D41	3/3	EF70	4/-	MS/PEN	6/-	SP61	2/-	(829B)	60/-	6SA7	6/-
D42	4/-	EF80	5/6	N34	8/-	SP210	4/-	3Q5GT	9/-	6SC7G	5/6
D77	4/3	EF85	6/10	NR15A	3/-	STV280/40	12/-	3V4	7/3	6SC7GT	6/-
DA30	12/6	EF86	9/-	NT37		SU2150A	4/9	4A1	4/6	6SG7	5/-
DAF86	8/-	EF89	7/9	(4033A)	10/-	T41	7/-	4D1	2/6	6SH7	4/6
DAF91	6/-	EF91	3/6	OD3	5/-	TP25	15/-	5U4G	5/-	6SJ7	7/-
DET5	15/-	EF92	4/6	P2	4/-	TT11	3/-	5Y3GT	6/-	6SF5	8/-
DET19	2/6	EF95	7/6	P61	2/3	U17	5/-	5Z3	8/6	6SJ7G	5/9
DET20	2/6	EL32	3/9	PCC84	7/-	U18	6/6	5Z4G	8/-	6SK7	5/3
DF70	9/-	EL33	8/-	PCC85	8/-	U27	8/-	6A6	5/-	6SL7GT	6/6
DF72	7/6	EL35	8/3	PCF80	7/-	U28	5/-	6AB7	4/-	6SN7GT	4/6
DF91	3/3	EL41	8/3	PCF82	8/-	U29	6/6	6AC7	3/-	6SQ7	6/-
DF96	8/-	EL42	9/-	PCL82	8/6	U37	8/-	6AG5	3/6	6SR7	6/6
DH76	4/9	EL84	7/6	PEN25	4/6	U50	7/-	6AG7	6/-	6SS7	6/-
DK96	8/-	EL85	10/-	PEN46	5/-	U49	5/6	6AJ7	4/3	6SV6G	5/6
DL72	7/6	EL91	7/6	PEN65	6/6	V2D33B	8/-	6AK6	7/6	6V6GT	6/-
DL71	8/-	ESU208	8/-	PEN220A	3/-	V226	5/-	6AK7	8/-	6X4	5/-
DL92	6/-	EY51	8/-	PENDD/		V248A	4/-	6AM5	5/-	6X5GT	6/-
DL94	6/-	EY86	8/-	1360	9/6	VMP4G	6/-	6AM6	6/3	6Y6G	80/-
DL96	8/-	EY91	3/6	PG7/5	15/-	VP23	3/6	6AT6	5/-	6Z4	5/6
DX25	9/-					VR78	4/-	6B8	5/6	723A/B	45/-
						VR99	8/-	6B8G	2/6	7Q7	7/-
						VR105/30	7/6	6C4	3/6	7Z4	6/-
						VR150/30	7/3	6C5	6/-	8D2	2/6
						VS110	4/-	6C6G	4/3	9D2	3/-
						VT25	8/-	6C8G	5/-	10Y	8/6
						VU39	6/-	6E5	5/-	12A6	5/-

12AH7	7/-	813	67/6								
12AT7	5/6	815	40/-								
12AU7	6/-	816	30/-								
12AX7	7/-	829A	30/-								
12CB	3/-	832	15/-								
12E1	32/6	843	7/4								
12H6	2/-	901	15/-								
12K8GT	9/-	866A	12/6								
12J5GT	3/6	872A	35/-								
12SA7	7/6	930	8/-								
12SC7	4/6	954	2/-								
12SG7	6/6	956	2/-								
12SH7	3/-	957	2/-								
12SJ7	6/-	1619	5/-								
12SK7	4/-	1625	6/-								
12SL7	7/-	1626	4/6								
12SN7	8/-	1629	4/6								
12SR7	6/-	6120	4/-								
15D2	6/-	7193	1/9								
15E	8/-	7475	5/-								
15R	7/6	8010AR	22/6								
21B6	9/-	8013A	10/-								
30	5/-	8020	6/-								
35T	30/-	9001	4/6								
35Z4	5/-	9003	5/6								
35Z4GT	7/-	9004	4/-								
39/44	6/-	9006	4/-								
53A	3/-										
58	6/-	Cathode Ray Tubes:									
59	6/-										
71A	4/6	3BP1	25/-								
75	6/-	5BP1	35/-								
77	6/-	SCP1	42/6								
78	7/-	5FP7	45/-								
80	6/3	VCRX258 (with scanning coil)	45/-								
82	8/-										
83V	12/-	Photo Tubes:									
84	8/-										
85A1	12/-	GST6	12/6								
89	6/-										
210LF	3/-	Special Valves:									
210VPT 7 pin	2/6	2J31	45/-								
217C	17/6	3A/1481	45/-								
446A	14/-	3J/170/E	£35								
705A	17/6	3J/192/E	£37/10								
715B	97/6	723AG	50/-								
717A	8/6	726A	27/6								
801	6/-	931A	50/-								
803	22/6	ACT25	40/-								
805	30/-	CV691	40/-								
807 AMER...	7/-	KR3	45/-								
807BR	5/-	VX7110	15/-								
808	8/-	WL417A	15/-								

AND MANY OTHERS IN STOCK including Cathode Ray Tubes and Special Valves.

All U.K. orders below 10/- P. & P. 1/-; over 10/- 1/6; orders over £3 P. & P. free. C.O.D. 2/- extra. Overseas Postage extra at cost.

BRAND NEW ORIGINAL SPARE PARTS FOR AR88 RECEIVERS.
Please write your requirements.

MOVING COIL ROUND HAND MICROPHONE No. 13. 2¼in. diam. with press switch. 12/6. P. & P. 1/-.

COSSOR DOUBLE BEAM OSCILLOSCOPE 339A. Fully tested and working. £15. Carriage 10/-.

VARIOMETERS for W/S No. 19. Fully tested and working 12/6. P. & P. 2/6.

FERRANTI TRANSFORMERS. Oil cooled. 20/19.5 KVA. 3 phase 50 cycles. Pri. 360-380-400-420-440 volts. Sec. 2700-2900-3100-3300-3500 volts. 2.1 amps. Voltage regulation by simple switch. Pri. and sec. Weight 1,150 lb. Price £125. Carr. at cost.

FILAMENT TRANSFORMERS. Primary 0-190-210-230-250 v., 50 c/s. Sec. 1. 2.5 v. CT at 10 amps. 2. 2.5 v. CT at 10 amps. 3. 10.5 v. CT at 11 amps., 4,000 v. insulation. Price £2/19/-. P. & P. 5/-. Primary 0-190-210-230-250 v. 50 c/s. Sec. 1. 10 v. CT at 4.5 amps. 2. 10 v. CT at 4.5 amps., 4,000 v. insulation, £1/16/-. P. & P. 5/-. Primary 230 v. 50/60 c/s. 67 v/amps. Sec. 1. 6.3 v. 1-6 amps. 2. 6.3 v. CT 3 amps. 3. 6.3 v. CT 3 amps. 4. 6.3 v. CT 3 amps., £1/12/-. P. & P. 5/-.

LOW RESISTANCE HEADPHONES. Brand new, balanced armature, DLR, 7/6. P. & P. 1/-.

TELEPHONE HANDSET. Standard G.P.O type new, 12/-. P. & P. 1/6.

B.C. 659 TRANSMITTER/RECEIVER, frequency range 27-38.9 mc/s. crystal controlled two preset channels. Together with power unit for 6, 12 or 24 v. D.C. good condition, £5/10/-. Carr. 15/-.

TRANS-RECEIVER No. 22. 2 megocycles to 8 Mc/s. Built almost exactly as Number 19. Set much more economical in battery consumption. Complete in fully working condition with power pack for 12 volts, head-gear and microphone, assembly key. £9/19/6. Carriage 15/-.

NEW PRODUCT OF TAYLOR



Model 127A Pocket size meter. Sensitivity 20,000 o.p.v. D.C. 1,000 o.p.v. A.C.
20 ranges.
D.C. current 50μA to 1 amp.
D.C. volts 0.3 v.-1,000 v. (25 kV. by probe).
A.C. volts 10 v.-1,000 v.
3 resistance ranges from 0-20 megohms (self contained). Metre 40μA 3½in. arc. Accuracy D.C. 3% A.C. 4% ohms 5%.
Dimensions 5¾ x 3¾ x 1¾in. Weight 14 oz. Price £10 complete with instruction manual, test prods and clips. Leather case £1/12/- extra.

OUTPUT TRANSFORMER, in screening can giving 9 different ratios 10 : 1 up to 120 : 1 for battery receivers or any high resistance pentodes used as output valves. 6/6. P. & P. 1/6.
DRIVER TRANSFORMERS. Primary 500 ohms imp. Sec. to match two 805 in push-pull £1/7/6. P. & P. 5/-.

P. C. RADIO LTD.
170, GOLDHAWK RD., W.12 SHEpherds Bush 4946

TRANSFORMERS. Relay supply Primary 230 v. Sec. 0-27/29/31 v. at 0.5 amp., 15/-. P. & P. 5/-.

COMPLETE SET OF STRONG AERIAL RODS (American). Screw-in type MP49, 50, 51, 52, 53, total length 15ft. 10ft. top diameter 0.615in., bottom diameter 0.185in., together with matched aerial base. MP37 with ceramic insulator, ideal for car or roof insulation £2/10/-. Post free.

SCR 522 RECEIVERS (BC624), 100-156 Mc/s., including all valves, 25/-. P. & P. 5/-.

H.T. CHOKES made by Bendix Radio (U.S.A.) 3 henrys .600A D.C. 25 ohms D.C. resistance 18 volts R.M.S. 60 cycle test £1/12/6. P. & P. 6/-.
Ditto 10 henrys 250 Amps. D.C. 90 ohms D.C. resistance 1500 R.M.S. 60 cycle test 16/6. P. & P. 3/6.

THROAT MICROPHONES T30 U.S.A. 3/6. P. & P. 1/6.

VIBRATOR UNIT. 12 v./160 v. 35 mAmps. Exceedingly well filtered and smoothed, excellent for car radios. New, including one 6X5G valve and vibrator. 17/6. P. & P. 5/-.

CARBON INSET MICROPHONE, G.P.O. type 2/6. P. & P. 1/-.

INSULATION TEST METER. Testing voltage adjustable up to 6,000 v. D.C. Mains supply 180/250 v. In wooden case £25. Carr. 10/-.

TCS RECEIVERS made by Collins of U.S.A., in fully guaranteed working condition. I.S. 12 Mc/s. line-up; 12S7 (1), 12SQ7 (1), 12A6 (2), 12SK7 (3), power requirements 12 volt L.T., 225 volts H.T. £11/10/-, carriage 12/6.

SPECIAL BUILT POWER PACK for the above. 230 volt A.C. mains, including 6X5gt valve. £3/10/-. Carriage 5/-.

MARCONI CR-100 COMMUNICATIONS RECEIVER. 60 Kc/s—30Mc/s. very good condition £25. Carriage £1/10/0.

PERSONAL CALLERS WELCOME

The VZ ELECTRICAL

METERS, we can supply and repair within 7-14 days: to B.S.89: Moving coil, moving iron, electrostatic, thermocouple, also multiranga meters, meggers, pyrometers, etc.

AUDIO EQUIPMENT, we supply and repair: Tape recorders, amplifiers, tuners, etc.

Write or phone:

311 EDGWARE ROAD, LONDON, W.2
Phone: PADdington 4515

P. A. MARRIOTT & CO., LTD.

Specialists in the manufacture of Magnetic Recording Heads.

284a WATER RD., WEMBLEY, MIDDLESEX. WEM 7493

BARGAIN OFFER

surplus

White Spot R.F. Transistors

at 4/6 each. *POST FREE*

Our Component Lists for 3d. Stamp
Money Back Guarantee on all Items

NEO MAIL ORDER SUPPLIES
2A MAXWELL RD., PORTSMOUTH

MALVYN ENGINEERING WORKS

Engineers to the Radio and Electronic Industries

Manufacturers of: Chassis, Small Pressings, Machined Components, Wiring and Mechanical Assemblies, to specification.

Single and Production Quantities

7 GURRIE STREET, HERTFORD, HERTS.

Telephone: Hertford 2264

MULLARD REFERENCE MANUAL of TRANSISTOR CIRCUITS

Postage 1/- 12/6

World Radio Handbook 1961, by Johansen. Postage 1/- 16/6

Practical Auto Radio Service and Installation, by Greenfield. Postage 1/- 23/-

Practical T.V. Trouble Shooting, by Gernsback. Postage 1/- 18/6

The Stereo Handbook by Purves. Postage 1/- 12/6

Transistor Projects, by Gernsback. Postage 1/- 23/-

Introduction to the C.R. Oscilloscope. 2nd ed. by Harley Carter. Postage 1/- 15/-

Coil Design and Construction Manual, by Sinclair. Postage 6d. 5/-

Radio T.V. and Electronics Data Book, by Babini. Postage 6d. 3/6

Practical Transistor Receivers. Book 1, by Sinclair. Postage 6d. 5/-

All About Cubical Quad Atennas, by Orr Postage 1/- 22/-

The New Antenna Book, by A.R.R.L. Postage 1/- 18/-

UNIVERSAL BOOK CO.
12 LITTLE NEWPORT STREET
LONDON, W.C.2 (adjoining Lisle Street

"LABORATORY OF THE AIR" it is often called.

From its beginnings as H.M. Balloon Factory in 1905, from the days of Cody's early flying experiments on Farnborough Common, it has grown through fifty years, adding to scientific and technical knowledge, aiding and advising the aircraft industry and designing and testing aircraft and equipment of many types.

Why don't YOU join the band of CRAFTSMEN who together with the scientists and technicians have given this Establishment a worldwide reputation?

We need :—

ELECTRONIC MECHANICS

Good prospects of houses for applicants not living near Farnborough.

Applications to Royal Aircraft Establishment, (Industrial Personnel), Farnborough, Hants., or telephone Aldershot 24461, Ext. 19, for appointment.



TELETRON TAPEJAK

The first Transistorized Radio Tuner, specially designed for use with Tape Recorders.

★ High Sensitivity.
★ Twin tuned circuits.
★ Pre-setting for MW. Programmes
★ Fixed tuned for 1,500M.

Price £8 9 0

THE TELETRON CO. LTD.
112B, Station Rd., London, E.4.
SIL. 0834.



RECORDING TAPE BARGAINS !

SPECIAL OFFER BRAND NEW

BOXED ● EXCELLENT QUALITY

5in. 600ft. 12/6
5in. 900ft. 18/-
5½in. 850ft. 18/-
5½in. 1,200ft. 21/-
7in. 1,200ft. 21/-
7in. 1,800ft. 32/6

P.P. 1/- one Tape; 1/6 two Tapes.
Money Back Guarantee. **Send for Lists.**

DICKINSONS of Pall Mall Ltd.
(Dept. W.W.)
11 Royal Opera Arcade, Pall Mall, S.W.1
(Behind Her Majesty's Theatre in the Haymarket)

EXCLUSIVE

OUR OWN MAKE OF PLAYER CASES AND CABINETS IN WALNUT AND MAHOGANY. MADE SPECIALLY TO HOUSE ANY TRANSCRIPTION PLAYER, MOTOR AND PICK-UP. FROM £8.

WRITE FOR DETAILS.

ALSO-WE BUY AND SELL GOOD HI-FI EQUIPMENT

H. C. HARRIDGE

8 Moor St., Cambridge Circus, W.1
Open Daily Except Thursday.

ODDIE FASTENERS

THE FASTENER WITH ENDLESS APPLICATIONS – SIMPLE – POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochure and other information will gladly be sent on request

DEPT. "W.W."

Oddie, Bradbury & Cull Ltd., Southampton

Tel. 55883 Cables: Fasteners, Southampton

FIRM
NEAR KINGS CROSS, LONDON, HAVE VACANCIES FOR
EXPERIENCED ELECTRONIC ENGINEERS

They must have specialised knowledge in amplifying equipment.

Good salary and working conditions. Write in strict confidence to:

Box. No. 1372 c/o "Wireless World."

A. K. & L. G. SMITH LIMITED

Wholesalers and Distributors of Electrical and Electronic Appliances, Household, Etc.

38, Nunhead Lane, Peckham, London, S.E.15

Q.C.C.

YOU are invited to apply for a copy of our illustrated brochure and price list which gives full details of our wide range of

QUARTZ CRYSTAL UNITS

which are renowned for their

Accuracy & Reliability

THE QUARTZ CRYSTAL CO. LTD.

Q.C.C. Works, Wellington Crescent, New Malden, Surrey | Telephones: MALden 0334 & 2988

TECHNICAL TRAINING in radio television and electronics engineering with

ICS

The decision is YOURS. To be a success in your chosen career; to qualify for the highest paid job; to control a profitable business of your own. ICS home-study courses put your plans on a practical basis; teach you theory and practice; give you the knowledge and experience to take you, at your own pace, to the top.

Choose the RIGHT course :

RADIO AND TELEVISION ENGINEERING
INDUSTRIAL TELEVISION
RADIO AND TELEVISION SERVICING
RADIO SERVICE AND SALES
VHF/FM ENGINEERING. ELECTRONICS
COMPUTERS AND PROGRAMMING

A.M.BRIT. I.R.E.; City and Guilds Telecom. Technicians.
C. & G. Radio and T.V. Servicing (R.T.E.B.).
C. & G. Radio Amateurs Certificates.

LEARN-AS-YOU-BUILD

Practical Radio Course

Gain a sound knowledge of Radio and T.V. as you build YOUR OWN 4-VALVE T.R.F. and 5-valve superhet radio receiver, Signal Generator and High-quality Multimeter. At the end of the course you have three pieces of permanent and practical equipment and a fund of personal knowledge and skill . . . ICS Practical Radio courses open a new world to the keen Radio amateur.

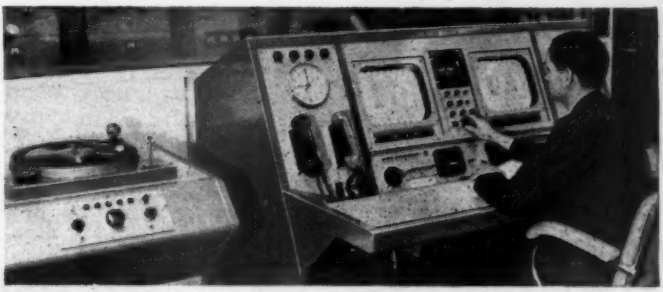

THERE ARE ICS COURSES TO MEET YOUR NEEDS AT EVERY STAGE OF YOUR CAREER

FILL IN AND POST THIS COUPON TODAY

You will receive the FREE 60-page ICS Prospectus listing examinations and ICS technical courses in radio, television and electronics PLUS details of over 150 specialised subjects.

Other ICS courses include: MECHANICAL, MOTOR, FIRE, CHEMICAL, ELECTRICAL AND CIVIL ENGINEERING . . . SELLING AND MANAGEMENT, ARCHITECTURE, WOODWORKING, FARMING, GARDENING, ART, PHOTOGRAPHY.

PLEASE STATE ON COUPON SUBJECT YOU ARE INTERESTED IN.

INTERNATIONAL CORRESPONDENCE SCHOOLS

DEPT. 223, INTERTEXT HOUSE, PARKGATE ROAD, LONDON, S.W.11

PLEASE SEND ME FREE BOOK ON.....

NAME .....

ADDRESS .....

.....

OCCUPATION ..... AGE..... 1.61

PERSONAL CALLERS welcome at the I.C.S. Information Bureau, 71, Kingsway, London, W.C.2.

CANADA

Canada's largest Electronics specialists have vacancies for radio and electronics technicians for duties in remote areas of Canada. Salary $7,500 per annum. Qualifications three years or more experience in installation or maintenance of communications type equipment with special emphasis on radio relay carrier radar and data transmission systems. Academic qualifications to City and Guilds or Higher National Certificate desirable but applicants with extensive practical experience considered. Suitably qualified applicants should send a résumé of their qualifications and attach a recent passport size photograph.

Interviews will be arranged in London during January 1961 for selected applicants.

Cost of transportation to Canada for personnel accepted will be borne by the Company.

Apply to Box Number 2677 c/o " Wireless World."

NEW! DO-IT-YOURSELF TRAINING TECHNIQUE in RADIO & ELECTRONICS YOU LEARN while you BUILD...

Simple... Practical... Fascinating...

ANNOUNCING—after years of successful operation in other countries—the latest system in home training in electronics introduced by a new British training organisation. *AT LAST*—a simple way of learning—by practical means—the " how and why " of electronics with the minimum of theory and no mathematics! *YOU LEARN WHILST BUILDING* actual equipment with the components and parts which we send you—and you really have fun whilst learning! And afterwards—you have a first-rate piece of home equipment plus the knowledge of how it works and how it can be serviced. *THIS NEW SYSTEM* brings you an exciting new opportunity at a very moderate cost—and there are *NO MATHEMATICS!* Post the reply coupon *TODAY* for *FREE* Brochure, to Britain's Leading Radio Training Organisation.

BUILD YOUR OWN:—
- *RADIO EQUIPMENT*
- *HI-FI INSTALLATION*
- *TEST EQUIPMENT*

AND LEARN AS YOU DO IT

LOTS OF INSTRUCTIVE EXPERIMENTS AT HOME!

No Mathematics!

FREE— POST TODAY

To: RADIOSTRUCTOR (Dept. 106)
Reading, Berks:
Please send Brochure without obligation to

Name.....
Address.....
(BI2).....

BLOCK CAPS PLEASE

RADIOSTRUCTOR

BRITAIN'S LEADING ELECTRONIC TRAINING ORGANISATION

PYE LIMITED OF CAMBRIDGE

require the following staff in their Engineering Department at Cambridge:

Ref. TDS — **TRANSFORMER DESIGNER** to assist with the design of a wide range of transformers, including power types up to 5kVA, audio and other miscellaneous types for radio, television and electronic applications.

Ref. CDE — **TELEVISION DESIGN ENGINEER** to work on the development of T/V receiver components, including scan coils and line output transformers. HNC standard desirable.

Ref. IT/H — **RADAR TECHNICIANS** with a sound knowledge of pulse techniques for the maintenance and calibration of nucleonic instruments. Technical qualifications to at least O.N.C. level and ability to work with minimum of supervision.

Ref. DRD — **DESIGN DRAUGHTSMAN** for mechanical design and development of radio receivers. Minimum qualification of ONC or equivalent. Previous electronic experience not essential.

Applications, quoting the appropriate reference should be addressed to the

Chief Engineer,
Pye Ltd., Cambridge

SEMI-CONDUCTOR INVERTORS

The invertor—a device for converting direct-current power supplies to alternating current without using moving parts—is receiving wide support as a replacement for rotating machinery. Its chief advantages are considerable weight-saving, higher efficiency, greater reliability and less need for servicing. From

. . . taking the lead . . .

the simple invertor there stems a range of power conversion devices which can revolutionise present ideas of auxiliary power supply systems. de Havilland are taking the lead in the design of these devices for use in aeroplanes, ships and industry.

To do so, the company is building up its team of designers, engineers and draughtsmen who will be able to call upon the already considerable experience in the organisation in advanced circuit and constructional techniques. The team will work on the design of semi-conductor and magnetic amplifier pulse circuits and high power filters and the necessary forms of mechanical construction to obtain enough cooling with great reliability.

The Hatfield research and development base is in pleasant Hertfordshire country but near London. It has all the facilities needed to produce the high-efficiency equipment which has growing markets here and overseas.

This is an unusual opportunity to join an exciting technical activity at a stage when its new programme is being planned to go beyond

. . . semi-conductor and magnetic amplifier pulse circuits . . .

the sizeable number of firm orders already held. The team needs senior men—for example, qualified engineers of some years' experience—who can lead laboratory teams on circuit design. It needs junior men too—draughtsmen and technicians. There will be ample chance to work in both the theoretical and practical aspects of design and development and to carry out evaluation and proving trials on the completed equipment.



. . . advanced circuit and constructional techniques . . .

This team will be an important one and so will the men in it.

If you consider that you could usefully work in this team, please write to:

Ref. 776
The Personnel Manager
The de Havilland Aircraft Company Limited
Hatfield
Herts

MEMBER COMPANY OF THE HAWKER SIDDELEY GROUP

TECHNICALLY TRAINED by

I C S IN RADIO, TELEVISION AND ELECTRONIC ENGINEERING

Opportunities in Radio Engineering and allied professions await the I.C.S. trained man. I C S Courses open a new world to the keen student . . .

RADIO AND TELEVISION ENGINEERING;
RADIO AND TV SERVICING;
ELECTRONICS, COMPUTERS & DATA PROCESSING, etc.

I C S Courses give very real help to the man setting up his own business or facing a technical career in the radio industry. Examination Courses for:—British Institution of Radio Engineers, City & Guilds TELECOMMUNICATION TECHNICIANS, C. & G. Radio & TV Servicing (R.T.E.B.) and C. & G. Radio Amateurs

LEARN-AS-YOU-BUILD PRACTICAL RADIO COURSE
Build your own 4-valve TRF and 5-valve superhet radio receiver Signal Generator and High-quality Multimeter.

FILL IN AND POST THIS I C S COUPON TODAY
It brings the FREE I C S Prospectus containing full particulars of I C S courses in Radio, Television and Electronics.

INTERNATIONAL CORRESPONDENCE SCHOOLS

. . . A WHOLE WORLD OF KNOWLEDGE for the KEEN STUDENT

International Correspondence Schools (Dept. 222P), Intertext House, Parkgate Road, London, S.W.11

NAME.....

ADDRESS.....
Block Capitals Please

.....

..... 1.61

TWO DEVELOPMENT ENGINEERS

required by leading manufacturers of aerials for V.H.F. and U.H.F. bands, member of well-known public group of companies. This is a specialised and fascinating field of enquiry allowing far more scope for improvement on existing techniques than offered by ordinary problems of standard circuitry. Laboratory is adequately equipped and new instruments will continually be acquired as needs dictates.

Cheerful, informal atmosphere, energetic policy, Company canteen, parking facilities. Senior Engineer should have full technological certificate, City and Guilds and/or Grad. Brit. I.R.E. or better. Junior accepted at lower qualifications. Development guided by Technical Director, M.Brit.I.R.E., S.M.I.R.E. Salaries according to qualification and ability, but in all cases to present-day standards. Application in strictest confidence to Box No. 2683 c/o " Wireless World."

NATIONAL COLLEGE FOR HEATING, VENTILATING, REFRIGERATION AND FAN ENGINEERING.

Intelligent men required for employment as technicians on the staff of this College. Applicants should be capable of maintaining and repairing delicate instruments.

Junior technicians also required for general workshop duties. Facilities offered for further education.

Apply in writing to the

Secretary, Borough Polytechnic, Borough Road, London, S.E.1.

RADIO TECHNICIANS IN CIVIL AVIATION

Men aged 19 or over for interesting work providing and maintaining aeronautical telecommunications and electronic navigational aids at aerodromes and radio stations in the U.K. Fundamental knowledge of radio or radar with some practical experience essential; training provided on special types of equipment. Salary according to age and station, approx. £670 at age 25 rising to £795. Prospects of permanent pensionable posts. Good opportunities for those who obtain O.N.C. in Elec. Eng. or certain C. and G. Certificates for promotion to posts with maximum salaries of £950, £1,085, £1,335. Apply to the Ministry of Aviation (Est.5(a)/RT), Berkeley Square House, London, W.1, or to any Employment Exchange (quoting Order No. Westminster 3552).

BOROUGH POLYTECHNIC
Borough Road, S.E.1.

Intelligent and reliable men or women, with responsible experience (and preferably qualifications) in Electronics or in Physics laboratory work required as Senior Laboratory Technicians in the Department of Electrical Engineering and Physics. Other technician vacancies also available for younger applicants with limited experience.

Apply, in writing, to the **Secretary, Borough Polytechnic, Borough Rd., London, S.E.1,** stating age, experience, qualifications and present occupation.

ELECTRONIC DEVELOPMENT ENGINEER

required

to lead a small team engaged in the development of commercial communication equipment. Applicants should have a degree or equivalent qualification and some years experience as Project Engineers. Preferred age range: 30/35 years.

NON CONTRIBUTORY PENSION SCHEME AND LIFE INSURANCE.
5 DAY WEEK.
EVENING INTERVIEWS ARRANGED.

Write giving details of education, qualifications and past experiences to :—

PERSONNEL MANAGER
MULTITONE ELECTRIC CO. LTD.,
12/20 UNDERWOOD STREET, N.1.

RADIO AND TELEVISION DEVELOPMENT

A well known Company in the Midlands, Manufacturers of Radio and Television Equipment, has vacancies in its Design and Development Laboratories for experienced:—

(a) **Development Engineers**
(b) **Television and Radio Engineers**
(c) **Mechanical Designers and Draughtsmen**
(d) **Technical Assistants**

for expanding Contracts and Commercial programmes. Opportunities exist for development work on all types of Radio Communications and colour television.

Applications stating qualifications, experience and salary required should be addressed in confidence to the **Personnel Manager, Box No. 2489 c/o "Wireless World."**

YOU can further your career
with

CREI ADVANCED ELECTRONICS EDUCATION

C.R.E.I. home study courses in Electronics are the culmination of 33 years of working closely with leading private companies and Government agencies in the United States. The result is a modern advanced programme of education comparable in technological content to that offered by technical colleges.

C.R.E.I. (London) as the European Division of The Capitol Radio Engineering Institute of Washington, D.C., are now able to offer these courses to you, with the same individual tuition methods which have made our courses outstanding in the United States.

The demand for C.R.E.I.-trained men is shown by the fact that more than fifty corporations and Government agencies in the U.S.A. have agreements with C.R.E.I. for enrolment of employees under company sponsorship.

Specialised Courses are available in:—

Mathematics for Electronic Engineers, Automation, Radar, Servo.

C.R.E.I. have recently compiled a complete course in Nuclear Engineering Technology.

(C.R.E.I. courses have been officially approved in the United Kingdom for the purpose of part refund of fees to members of all three Services.)

If you have had at least two years practical experience in electronics or the equivalent please write for full particulars and detailed programmes to: Dept. W.I.

C.R.E.I. (LONDON), 132/5, SLOANE STREET, LONDON, S.W.1

Telephone: SLOane 8277/9

BRITISH RELAY WIRELESS AND TELEVISION LIMITED

The increasing scope of our activities has produced vacancies in our laboratories for competent

ENGINEERS

of the following grades:—

(1) B.Sc. or H.N.C. plus endorsements, and not less than six years' suitable experience in communications or electronics.

(2) Qualifications similar to or approaching the above, with experience to include television receiver design.

(3) City and Guilds final certificate or equivalent and not less than three years' laboratory experience in television or communications.

Commencing salaries for grade (1) *will be in the range* £1,200-£1,400, *for grade* (2) £1,000-£1,250, *for grade* (3) £850-£950, *with good prospects for advancement.*

Applications which will be treated in strict confidence should be sent to BRITISH RELAY WIRELESS LTD., 1-7 CROFT STREET, DEPTFORD, S.E.8, and addressed to the CHIEF RESEARCH ENGINEER (for grade (1) appointments) or to the GENERAL MANAGER, ENGINEERING DIVISION for grades (2) and (3).

DRAUGHTSMEN

We have a requirement for a large number of Designers and Draughtsmen at all levels experienced in:

Electronic and Computer equipment
Airframe Structures
Hydraulic Systems
Radio or Scientific Instrumentation
Structural, Mechanical and Electro-Mechanical devices

HOUSING ASSISTANCE MAY BE POSSIBLE

ATTRACTIVE SALARY PROSPECTS

Applications to be sent to:—Technical Personnel Officer, c/o Dept. C.P.S., English Electric House, Strand, London, W.C.2, quoting reference WW1399.

ENGLISH ELECTRIC AVIATION LTD.

Guided Weapons Division
London — Luton — Stevenage

Make Your Ability PAY

UNLIMITED OPPORTUNITIES exist today for "getting on" . . . but only for the fully trained man. Let I.C.S. tuition develop your talents and help you to success.
STUDY IS EASY with I.C.S. guidance. The courses are thorough. Printed manuals, fully illustrated, make study simple and progress sure. **YOUR ROAD TO SUCCESS** can start from here—today. Complete this coupon and post it to us, for full particulars of the course which interests you. MODERATE FEES INCLUDE ALL BOOKS.

Take the right course now . . .

ADVERTISING
Gen. Advertising, Retail & Dept. Store, Copywriting
ART
Oil & Water Colour Commercial Illustrating
BUILDING
Architecture, Clerk of Wks. Building Construction Bricklaying, Quantity Surv.
CIVIL ENGINEERING
Highway Eng., Struct. Engrg. Concrete Engineering
COMMERCE
Bookkeeping, Accountancy, Office Training, Costing, Secretaryship, Storekeeping Shorthand & Typewriting
DRAUGHTSMANSHIP
Architectural, Mechanical, Maths. & Machine Drawing Drawing Office Practice Structural Drawing
ELECTRONICS
Industrial Electronics Computers & Maintenance
FARMING
Arable & Livestock Farm Machinery Maint. Pig & Poultry Keeping Market Gardening
FIRE ENGINEERING
I.F.E. Examinations Fire Service Promotion
GENERAL EDUCATION
Good Eng., Foreign Langs. G.C.E. subjects at ordinary or advanced level

HORTICULTURE
Complete Gardening Flower & Veg. Growing
MANAGEMENT
Business Management Hotel Management Office Management Industrial Management Personnel Management Work Study, Foremanship
MECHANICAL & MOTOR ENGINEERING
Engineering Maths., Weld'g Diesel Engines and Locos. Inspection, W'kshop Pract. Refrigeration, Motor Mech. Running and Maintenance (many other subjects)
INTENSIVE COACHING for all principal examinations, including C.I.S., A.C.C.A., I.C.W.A., B.I.M., A.M.I.Mech.E., Brit.I.R.E., I.Q.S., City & Guilds of London Institute, R.H.S., etc.

PHOTOGRAPHY
Practical Photography P.D.A. Examination
POLICE
Police Entrance Exam.
RADIO, T.V. & ELECTR.
Radio Servicing & Engrg. T.V. Servicing & Engrg. Radio Constrn. (with kits)
SELLING
Commercial Travellers' Sales Managmt., Sel. Selling
WRITING FOR PROFIT
Short Story Writing Free-Lance Journalism And many other subjects.

Start today the I.C.S way!

(Dept. 222R)
Intertext House, Parkgate Rd., London, S.W.11

Send FREE book on.....
Name .....
Address.....
.....
Occupation..... 1.61

INTERNATIONAL CORRESPONDENCE SCHOOLS

MIDDLESEX COUNTY COUNCIL
Education Committee
TWICKENHAM TECHNICAL COLLEGE
A Course of Nine Lectures on
RECENT DEVELOPMENTS IN HIGH FIDELITY SOUND REPRODUCTION
will be held on Monday Evenings, beginning 16th January, 1961.

The Course includes—
Systems of Audio Reproduction.
Signal Sources—Disc, Tape, Microphone, Radio.
Amplifiers.
Loudspeakers.

Lecturers: G. D. Browne (Mullard Research Laboratories)
Stanley Kelly (Consultant)
James Moir (Goodmans Industries)
D. L. A. Smith (Twickenham Technical College)

Fee £1 0s. 0d.

Brochures and application forms are available from
The Principal, Twickenham Technical College, Egerton Road, Twickenham, Middlesex Telephone: POPesgrove 6656.

FOR THE FIRST TIME IN THIS COUNTRY

THE WORLD'S FAIRY TALES DRAMATIZED ON TAPE

Told by MELANIE SCOTT

Complete Set of 4 Reels containing 16 different stories

Price: 29/6 per 5" Reel of Four Stories

Postage: 1/6 per tape

From: H. B. TRADING CO.
60-66 Wardour Street, W.1

THE PEMBRIDGE COLLEGE OF ELECTRONICS

offers training in

RADIO TELEVISION AND ELECTRONICS

ATTENDING COURSE

Full-time One Year Course in Radio and Television. College course in basic principles for prospective servicing engineers.

Next course commences 3rd January, 1961.

This course is recognised by the Radio Trades Examination Board (R.T.E.B.) for the new Servicing Certificate examinations.

HOME-STUDY COURSES

A. Radio and Television Servicing.

(1) Introductory course.

(2) Basic course covering R.T.E.B. Intermediate Radio and Television Servicing Certificate examination.

B. Courses in Radio, Telecommunications and Mathematics up to City and Guilds Telecommunication Technicians' Final Certificate.

C. Constructional kits.

For details, write to:

The Principal, PI1

THE PEMBRIDGE COLLEGE OF ELECTRONICS

34a Hereford Road, London, W.2

FC11

FREE TO AMBITIOUS ENGINEERS

— THE LATEST EDITION OF ENGINEERING OPPORTUNITIES

Have you sent for your copy?

ENGINEERING OPPORTUNITIES is a highly informative 156-page guide to the best paid engineering posts. It tells you how you can quickly prepare at home for a recognised engineering qualification and outlines a wonderful range of modern Home Study Courses in all branches of Engineering. This unique book also gives full details of the Practical Radio & Electronics Courses, administered by our Specialist Electronics Training Division—the *B.I.E.T. School of Electronics*, explains the benefits of our Employment Dept. and shows you how to qualify for five years promotion in one year.

We definitely Guarantee

"NO PASS—NO FEE"

Whatever your age or experience, you cannot afford to miss reading this famous book. If you are earning less than £25 a week, send for your copy of "ENGINEERING OPPORTUNITIES" today—FREE.

WHICH IS YOUR PET SUBJECT?

Mechanical Eng., Electrical Eng., Civil Engineering, Radio Engineering, Automobile Eng., Aeronautical Eng., Production Eng., Building, Plastics, Draughtsmanship, Television, etc.

GET SOME LETTERS AFTER YOUR NAME!

A.M.I.Mech.E. A.M.I.C.E. A.M.I.Prod.E. A.M.I.M.I. A.I.O.B. A.F.R.Ae.S. B.Sc. A.M.Brit.I.R.E. City & Guilds Gen. Cert. of Education Etc., etc.

PRACTICAL EQUIPMENT

Basic Practical and Theoretic Courses for beginners in Radio, T.V., Electronics, Etc., A.M.Brit.I.R.E. City & Guilds Radio Amateurs' Exam. R.T.E.B. Certificate P.M.G. Certificate Practical Radio Radio & Television Servicing Practical Electronics Electronics Engineering Automation

INCLUDING TOOLS!

The specialist Electronics Division of B.I.E.T. (incorporating E.M.I. Institutes) NOW offers you a real laboratory training at home with practical equipment. Ask for details.

B.I.E.T. SCHOOL OF ELECTRONICS

POST COUPON NOW!

Please send me your FREE 156-page "ENGINEERING OPPORTUNITIES" (Write if you prefer not to cut page)

NAME.....

ADDRESS.....

.....

.....

SUBJECT OR EXAM THAT INTERESTS ME .....

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY *(Incorporating E.M.I. Institutes)* **(Dept. SE/22), 29 Wright's Lane, London, W.8**

THE B.I.E.T. IS THE LEADING ORGANISATION OF ITS KIND IN THE WORLD

G.E.C. COVENTRY

We are Britain's leading Suppliers of

TELECOMMUNICATIONS SYSTEMS

and are developing equipment using the latest electronic techniques.

We can offer:

Absorbing work on the development of

VHF AND MICROWAVE RADIO
TRANSISTORISED CARRIER EQUIPMENT
AND DIGITAL COMPUTERS

We require

LABORATORY ENGINEERS

and

EQUIPMENT DESIGN ENGINEERS

with University degrees, H.N.C. in electronic engineering or relevant experience.

These vacancies offer a genuine opportunity for personal and professional advancement under ideal working conditions and with attractive salaries.

Apply:

giving details of age, experience and education to the

STAFF OFFICER

TELEPHONE WORKS

THE GENERAL ELECTRIC COMPANY

COVENTRY

DIGITAL COMPUTERS

Resulting from continued expansion in the computer field, a number of vacancies have arisen for

GRADUATE ELECTRONIC ENGINEERS

and for

TECHNICIANS

of O.N.C. standard.

The additional staff are needed for technical supervision and maintenance of Digital Computer Installations.

Vacancies exist in

LONDON, BIRMINGHAM, MANCHESTER and HULL.

Training will be provided for this interesting work and there are opportunities for rapid promotion to positions of responsibility. Salaries are generous and in proportion to ability.

Please write to Personnel Manager,

THE NATIONAL CASH REGISTER CO. LTD.

206-216 Maryiebone Road, London, N.W.1.

Kodak Limited

have a vacancy for an

Electronic Engineer

in its Project and Design Department. This Department is a member of the Engineering Division where over 1,000 employees are located.

The work will cover development design, construction assembly and sometimes maintenance of a wide variety of industrial electronic control equipment.

Candidates should preferably hold H.N.C. or equivalent.

The Company offer excellent employee benefits and a career of real potential in a go-ahead industry.

Please write for application form to

Personnel Manager,
Kodak Limited (Factories)
Wealdstone, Harrow, Middx.

UNITED KINGDOM ATOMIC ENERGY AUTHORITY

DOUNREAY EXPERIMENTAL REACTOR ESTABLISHMENT

Instrument Mechanics (Physical and Electronic) and Instrument Electricians

There are vacancies in the Instrument Department for men with experience in the maintenance of instruments for the measurement of pressure, flow and temperature, electronic instruments, radar and television and for electricians with experience in the maintenance of temperature recorders and electromagnetic relays.
Applications are invited from men with experience of instruments in industry or with appropriate experience in H.M. forces.
The rate of pay is £13.7.0d. for a 44 hour five day week and there is a superannuation scheme. Housing will be made available to married men and there is accommodation for single men and married men awaiting housing.
Facilities are available for further education and promotion prospects are good.
Application forms and further information can be obtained from Recruitment Officer, Dounreay E.R.E., Thurso, Caithness, Scotland.

ELECTRONICS TECHNICIAN

required for

prototype and experimental work on a varied range of equipment. The man we seek will have had a sound basic training in electronics and some years experience in either the communications or electronic control equipment industries. A knowledge of advanced radio interference measuring techniques would assure the opportunity of taking part in sea trials.

Applications giving details of experience to Box No. 2790 c/o " WIRELESS WORLD."

VACANCIES FOR DESIGN AND DEVELOPMENT DRAUGHTSMEN IN GOVERNMENT SERVICE AT CHELTENHAM

Experience in one or more of the following:—
(1) Maintenance of radio communication receivers.
(2) Sub-assembly lay out, wiring and testing of radio type chassis.
(3) Cabling, wiring and adjustment of telephone type equipment.
(4) Fault finding in and maintenance of electronic apparatus.
(5) Maintenance of teleprinter or cypher machines and associated telegraph equipment.

Basic Pay £9/9/8 per week plus merit pay assessed at interview and based on ability and experience as under:—

ORDINARY RATE 10/- to 80/- per week.
SPECIAL RATE 80/- to 100/- per week.

Opportunities for permanent and pensionable posts. Five-day week; good working conditions; single accommodation available.

Apply in writing to:—
Personnel Officer,
G.C.H.Q. (RDC/3),
53, Clarence Street,
Cheltenham, Glos.

Hawker Siddeley Aviation
LIMITED

GUIDED WEAPONS

A. V. ROE & CO. LIMITED

ENGINEERS

Opportunities are available in a newly formed department for advanced work on missile design. Vacancies are available as follows:—

ELECTRONIC ENGINEERS AND TECHNICIANS FOR DESIGN WORK ON :-

Transistor Electronics
Analogue Computors
Digital Data Handling Devices
Control Systems

ELECTRO-MECHANICAL ENGINEERS AND TECHNICIANS FOR DESIGN WORK ON :-

Mechanisms
Precision Instruments
Optical Equipment
Electro Magnetic Devices

Applications, quoting Reference No. R.49/W should be addressed to :

THE CHIEF ENGINEER,
A. V. ROE & CO. LIMITED, WOODFORD AERODROME, CHESHIRE

MIDLAND INDEPENDENT TELEVISION STUDIO CENTRE

A junior draughtsman is required for work associated with electronic equipment (valve and transistor circuits), chassis layouts, installation diagrams etc. Experience of Television Equipment is not essential.

Apply in writing to:—

Chief Engineer
Alpha Television Services (B'ham) Ltd.,
Aston Road North, Birmingham, 6

SOLARTRON

TEST ENGINEER

is required for the Test Department for fault finding and testing electronic instruments to specification. In Solartron we believe that consideration for the individual comes first. Our amenities and conditions of employment match this philosophy.

(Ref.: 488/WW)

Please apply to:—

John Delfgou,
Assistant Personnel Officer,
Solartron Laboratory Instruments Ltd.,
Queens Road,
Thames Ditton, Surrey.

MIDLAND INDEPENDENT TELEVISION STUDIO CENTRE

An Engineer and an Assistant Engineer are required at the above Studios. The work is varied and covers the maintenance of studio equipment and the development of interesting new devices (we like transistors!) for use in connection with Television Broadcasting.

Applicants with either studio or design experience should write to:

Chief Engineer,
Alpha Television Services (B'ham) Ltd.,
Aston Road North, Birmingham, 6

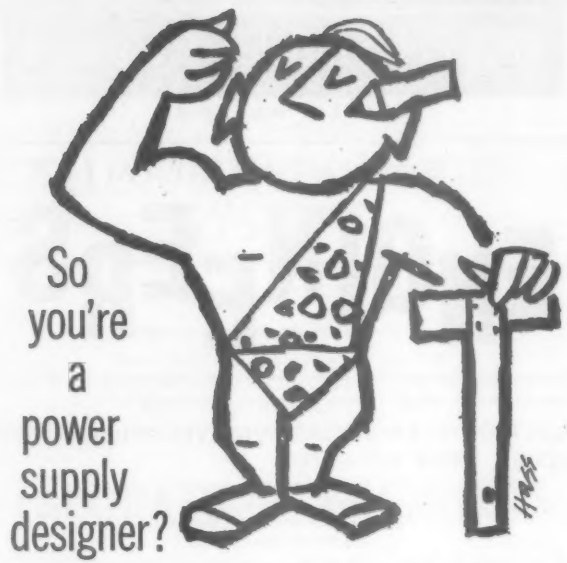

So you're a power supply designer?

Splendid. That's just what we're looking for. We need people to design power supplies for computers. You'll have to be very good, mind you. This is a highly specialised field and you'll have to know about power supply design backwards. Forwards too, of course, because that's the direction Elliotts are going – fast! If you'd like to do an important job for Britain's liveliest company in today's most exciting industry – here's your chance.

Drop us a line now quoting this paper, to:

The Personnel Manager, Elliott Brothers (London) Ltd., Elstree Way, Borehamwood, Herts.

ELLIOTT

assistant acoustics engineer

A major organisation in the Electrical Engineering field has an opening for a young man preferably between the ages of 25/30. A good education with possession of a Degree or Higher National Certificate in Physics and/or Radio, and Mathematics are essential qualifications, and preferred candidates should have had R.A.F. Radio or Radar experience. It is also desirable but not essential that candidates should have pursued an advanced course in Acoustics.

The initial location of the post will be in London but in due course the Unit will move to the West Country. Full transfer allowances would be payable on change of location, and housing may be available in approved cases.

A generous salary is envisaged together with Pension and Life Assurance Benefits.

Applications, stating age, qualifications and experience to Box No. 2889 c/o "Wireless World."

VACANCIES IN GOVERNMENT SERVICE

A number of vacancies offering good career prospects exist for:—

RADIO OPERATORS .. MALE
CYPHER OPERATORS } MALE AND
TELEPRINTER OPERATORS } FEMALE

Write, giving details of education, qualifications and experience to:—

Personnel Officer, G.C.H.Q. (S/E.C.O.), Foreign Office 55, Clarence Street, Cheltenham, Glos.

TECHNICAL PUBLICITY SERVICE

Applications are invited for a progressive position in the above field.

This will present an opportunity for interesting and stimulating work with excellent prospects, in the PUBLICITY DEPARTMENT of a leading valve manufacturer in the London area.

Candidates should be aged between 25 and 40, preferably Graduates or Qualified Engineers, with knowledge of modern thermionic tubes or allied electronic devices.

Qualifications for the post should include:—

(a) Ability to appreciate and interpret, from a Sales angle, technical features of valves and kindred devices for communications and other industrial equipment.

(b) Ability to write sound selling copy and technical articles on the products of the Company.

Some knowledge of commercial practice and modern publicity techniques would be an advantage. Commencing salary up to £1,200 per annum according to qualifications and experience.

Write to: Box No. 2888 c/o "WIRELESS WORLD."

TECHNICAL ASSISTANTS

required for interesting work on special types of electronic valves and microwave devices. Applicants should be studying for an H.N.C. or degree, and should have already reached, at least O.N.C. standard. Previous experience in this expanding field is not essential, as specialised training will be given.

Please write, giving details of previous positions and experience and quoting TA/2 to

Personnel Officer,
M.O. Valve Co. Ltd.,
Brook Green, Hammersmith,
W.6.

ELECTRONIC TESTER

required

for Test and Inspection duties on Electronic Instruments. Candidates should have knowledge of Valve and Transistor Circuits and be capable of designing and making specialised test equipment.

INSTRUMENT SERVICE ENGINEER

to carry out inside service on wide and interesting range of Electronic Instruments.

Apply in writing in first instance stating salary required to:

Messrs.

FARNELL INSTRUMENTS Ltd.,

Light Industrial Estate,

York Rd., WETHERBY

G.E.C.

THE M-O VALVE CO. LTD.

HAVE VACANCIES

FOR VARIOUS LEVELS OF TECHNICAL STAFF

in the following fields:

1. **Development Engineering**
2. **Microwave Engineering**
3. **Applications Engineering**
4. **Circuit Engineering**
5. **Methods & Design Engineering**

APPLICATIONS are invited from Graduates and Qualified Engineers, aged between 23 and 35, preferably with experience in the electronics and associated fields. Salary will be appropriate to the qualifications and experience of the candidate, and prospects for advancement will be excellent.

Write to:— ***Personnel Manager,***

M-O VALVE CO., LTD., BROOK GREEN, LONDON, W.6.

quoting reference DE/PM/60.

Strictest confidence will be observed.

INTERNATIONAL COMPUTORS AND TABULATORS LTD.

Hollerith & Powers Samas Accounting Machines

Electronic Engineers are required to specialize, after training, on Electronic Calculators and Computors installed, or to be installed in Greater London, Midlands and North West England areas.

The following training and experience is required:—

1. **Experience** in the maintenance and servicing of Electronic equipment (Pulse Techniques) either in Industry or H.M. Forces on Radar; in addition the ability to handle bench tools and instruments, with an appreciation of the effect of electrical circuits on complex mechanisms.

2. **Qualifications**
H.N.C. (Electrical or Electronics) or O.N.C. (Electrical) or at least two years' study for the City and Guilds Certificate in Telecommunications. (Advanced G.C.E. in Maths and Physics, with experience on Radar in H.M. Forces will also be considered.)

These are staff vacancies which offer:—

(a) An attractive career
(b) Retirement benefits
(c) An excellent Sick Pay Scheme
(d) Three weeks' holiday after five years.

Applicants who have this training and experience and who are aged 24–32 years are invited to write to:—

The Principal,
Field Engineering Personnel Section,
I.C.T. Ltd., 5/11 Holborn Bars, E.C.1.
(Ref.—W.W.)

UNITED KINGDOM ATOMIC ENERGY AUTHORITY

PRODUCTION GROUP

INSTRUMENT MECHANICS

Windscale and Calder Works, and Chapelcross Works require experienced men with knowledge of electronic equipment and/or industrial instrumentation for fault diagnosis, repair and calibration of a wide range of instruments used in nuclear reactors, radiation laboratories and chemical plant. This interesting work involves the maintenance of instruments using pulse techniques, wide band low noise amplifiers, pulse amplitude analysers, counting circuits, television and industrial instruments used for the measurement of pressure, temperature and flow.

Men with Services, Industrial or Commercial background of radar, radio, television, industrial or aircraft instruments are invited to write for further information. Training Courses in Specialised Techniques are provided for successful applicants having suitable Instrumentation background.

Married men living beyond daily travelling distance will be eligible for housing. A lodging allowance is payable whilst waiting for housing. Working conditions and promotion prospects are good.

Applications to:

Works Labour Manager, Windscale and Calder Works, Sellafield, Seascale, Cumberland

or

Works Labour Manager, Chapelcross Works, Annan, Dumfriesshire, Scotland.

AUTOMATIC TELEPHONE & ELECTRIC COMPANY LIMITED

LIVERPOOL

ASSISTANT EDITOR

for TECHNICAL HOUSE JOURNAL

Applications are invited for the post of ASSISTANT EDITOR of the "A.T.E. JOURNAL." This Journal is primarily concerned with tele communication engineering, with increasing emphasis on advanced electronic circuitry techniques.

Applicants should possess appropriate academic or professional qualifications, and have had several years experience in technical journalism.

The initial salary envisaged is in the range £1,000-£1,400, and assistance with removal and housing would be given if necessary.

Applications, giving full details of age, qualifications and experience should be addressed to:

PERSONNEL MANAGER,
AUTOMATIC TELEPHONE & ELECTRIC CO. LTD.,
Strowger Works, Liverpool, 7.

MORSE CODE TRAINING

Get your Radio Operator's Licence the easy way!

CANDLER has taught MORSE CODE by correspondence for 50 years.
On Land, Sea and in the Air and in every Continent, you will find first-class Radio Operators who have learnt their profession or excelled as Amateurs the CANDLER WAY. *Writ. for the Candler "Book of Facts" without obligation and see for yourself how fascinating the Candler Method of teaching the Morse Code can prove. You may if you wish pay as you learn.*

CANDLER SYSTEM CO.
(55W) 52a ABINGDON RD., LONDON, W.8
Candler System Co., Denver, Colorado, U.S.A.

Senior Engineer

Plessey

required to take charge of the Design Section of the Components Laboratory dealing with

TRANSISTOR I.F. TRANSFORMERS

This is a senior appointment and offers ample scope to an engineer who has considerable aptitude for original design work.

This new appointment presents unusual opportunities for advancement. Technical Library facilities.

Please reply, giving full details to The Personnel Manager, The Plessey Company Limited, Vicarage Lane, Ilford, Essex, quoting Ref. 6952.

AIRCRAFT RADAR/RADIO FITTERS

required for servicing Varsity Aircraft. Applications invited from ex Regular R.A.F. and F.A.A. personnel with recent service experience.

Apply: **Personnel Manager, Western Airways Ltd., Weston Airport, Som.**

GPO

A FIRST CLASS JOB IN THE G.P.O.

Men between the ages of 20-35 are required to work in Central London on installing and maintaining telephone apparatus and transmission equipment. Older men, up to the age of 45, will be accepted, if they have the experience which is particularly suitable. Commencing pay is £9 16s per week rising to £12 2s. Men who show ability to progress, will be given every opportunity to qualify for Technical Officer posts on which the salary is £600 a year rising to £850. Further promotion is available.

Apply in writing stating age and experience to:—
Chief Regional Engineer (Ref. S/D&A(EB)),
London Telecommunications Region,
Waterloo Bridge House,
Waterloo Road,
London, S.E.1.

ASSISTANT TO THE CHIEF ENGINEER
PAINTON & CO. LTD.

Manufacturers of high quality components for the Electronics Industry, are expanding their activities and wish to appoint an Assistant to the Chief Engineer. Applicants must be graduates in Physics or Electrical Engineering, have experience in the design and development of Electronic Components and be able to carry executive authority. This is a staff appointment with superannuation scheme. Applications to the Personnel Officer, Kingsthorpe, Northampton.

PROTOTYPE ELECTRONIC WIREMEN capable of developing new wiring layouts from Designers sketches willing to do a small amount of metalwork. Five day week, Canteen, Superannuation. Please write to the:—
Personnel Officer,
HILGER & WATTS LTD.,
98, St. Pancras Way,
London, N.W.1.
quoting Ref. No. H 39.

RADIO and T.V. ENGINEERS for AMERICA

Ten engineers with four to six years' experience in radio and/or TV design and development are required by an American client. Applicants, who must be of British birth, will be interviewed in London in the near future. Salaries open to negotiation. Send comprehensive details to

Engineering and Scientific Advisers Ltd.,
30 Spring Gardens,
Manchester 2.

PHILIPS ELECTRICAL LIMITED
Medical X-Ray Division,
45 Nightingale Lane, Balham, S.W.12.

TEST ROOM ENGINEER

required for X-ray and Electro Medical apparatus. Applicants must be capable of carrying out final test and inspection. A minimum qualification of O.N.C. (electrical) is desirable or applicants with previous experience would be considered. Write giving full details to the Personnel Officer at the above address.

INDEPENDENT TELEVISION NEWS, LIMITED

REQUIRES

TELEVISION OPERATOR/ENGINEERS

To operate electronic equipment during transmission and act as Engineers outside transmission periods, constructing and maintaining equipment with the minimum of supervision. Sound knowledge of electronic theory with good practical experience required. Development Engineers in radio or electronics could be suitable. Salary £1,294 per annum. Pension scheme. Apply to **Secretary, I.T.N., Television House, Kingsway, W.C.2.**

SOUTHERN RADIO'S WIRELESS BARGAINS

TEST METERS. PORTABLE. 3½ x 3½ x 2½in. D/C. M/C. Ranges 0–5,000 ohms; 0-60 mA; 0–3 volts; 0–1.5 volts. Range can be extended to suit individual requirements by addition of resistances. **NEW AND TESTED.** 12/6 each plus 2/- P. & P. SPECIAL QUANTITY PRICES: 12 for £7. Carriage paid U.K. (ex. sea routes).

METERS. 30-0-30 and 3-0-3 volts combined ranges with prods, 15/-.

ATTACHMENTS for "38" TRANSMITTER-RECEIVERS Mark II. HEADPHONES 15/6 per pair; THROAT MICROPHONES 4/6; JUNCTION BOXES 2/6; AERIALS. No. 1 2/9, No. 2 3/3; WEBBING 4/-; HAVERSACKS 5/6; VALVES. A.R.P.12 4/6, A.T.P.4 3/6; SET OF FIVE VALVES 19/-. Postage on each item except valves 1/6 extra.

RECORDING BLANKS. Brand new Ready for cutting. 13in. 6/- each or 15 complete in metal case, £4.

RESISTANCES. 100 assorted useful values. New wire end 12/6. NEW.

CONDENSERS. 100 assorted Mica; Tubular; etc., 15/-. NEW.

CONTACTOR TIME SWITCHES. 2 impulses per sec., in case, 11/6.

REMOTE CONTACTOR. For use with above, 7/6.

LUFBRA HOLE CUTTERS. Adjustable ⅜in. to 3½in. For Metal, Plastics, etc., 7/-.

MAGNETS. Strong Bar type, 2 x ¼in., 1/6 each.

MORSE TAPPERS. Midget type 2/9; Standard 3/6; Heavy type on base, 5/6. ALL BRAND NEW.

MORSE PRACTICE SET. TAPPER with BUZZER on base. Complete with battery, 12/6. BRAND NEW.

PACKARD-BELL AMPLIFIERS. Complete. BRAND NEW, with valves, relay, etc., etc., 17/6 each.

TRANSMITTER-RECEIVERS. Type 18. Mark III. ALL BRAND NEW COMPLETE with 6 valves in carrying case. £4/17/6. Carr. paid.

ATTACHMENTS for "18" TRANSMITTER-RECEIVERS Mark III. HEADPHONES 15/6 per pair. HAND MICROPHONES 4 a.. 12/6; AERIALS 5/9; MORSE KEY 6/6; VALVES. ARP12 4/6, A.R.8 7/6, A.T.P.4 3/6; SET OF SIX VALVES 25/-. Postage on each item except valves 1/6 extra.

R.109 RECEIVERS. SHORTWAVE 1.8 to 8.5 mc/s. Complete with six valves Vibrator pack for 6 volts. Built-in speaker. In metal case. £5.

BOMBSIGHT COMPUTERS. Recent purchase, ex-R.A.F. Ideal for experimenters. A wealth of gears, motors, blowers, etc., etc. £3/12/6 carriage paid.

QUARTZ CRYSTALS. TYPES F.T. 241/F.T.243. 2-pin, ½in. space. Frequencies (F.T.243) 5,700 kc/s to 8,650 kc/s. (F.T.241) 20 Mc/s to 38.9 Mc/s (54th and 72 nd harmonics). 4/6 each.

BRAND NEW. TWELVE ASSORTED CRYSTALS 45/-. BRAND NEW. HOLDERS FOR BOTH TYPES 1/3. Customers ordering 12 crystals can be supplied with lists of frequencies for their choice.

CRYSTAL CASES. FT..241/243 types. 10/6 per dozen.

STAR IDENTIFIERS. Type I.A-N. covers both hemispheres. 5/6.

COMMAND RECEIVERS. B.C. 454 3-6 Mc/s. B.C. 455 6-9 Mc/s. Complete with 6 valves. New condition. 47/6 each.

DYNAMOTORS FOR ABOVE. 28 volts. 15/-.

VISUAL INDICATORS (10Q/4). Type 3. With 2 meter movements and two neons. New in cover. 12/- each.

TRANSPARENT MAP CASES. Plastic 14in x 10in. Ideal for Maps, Display, etc., 5/6. *Post or carr. extra. Full list Radio Books, etc., 3d.*

SOUTHERN RADIO SUPPLY, LTD.
11, LITTLE NEWPORT STREET,
LONDON, W.C.2. GERrard 6653

LONDON CENTRAL RADIO STORES

TIME SWITCHES, VENNER. 7-day clockwork, 230 v. 1 A. Thoroughly reconditioned and guaranteed. 32/6 including post and packing.
10-WAY PRESS BUTTON INTER-COM TELEPHONES, in Bakelite Case with junction box. Thoroughly overhauled. Guaranteed. 26/15/-.
DESK PHONES. Complete with Hand Set and Dial 0-9 in Bakelite Case. £3/19/6.
PROJECTION LAMPS. Pre-focus 100 v. 200 w. in new condition. 8/6.
P.R. V.H.F. RECEIVERS in metal case. Weight 37 lbs. Size approx. 21½ x 9 x 6½in. 57/6.
AVO UNIVERSAL TEST METERS. Reconditioned, as new. In perfect working order. Model 7, £9/9/-.
C.R. VISION UNITS complete with VCR97. Size approx. 9½ x 9 x 6½in. In metal case. 37/6.
HIGH-SPEED ELECTRO-MAGNETIC COUNTERS. Ex-Govt. 0-9,999 25/50 v. D.C. Size 4 x 1 x 1in. Single coil 2,500 Ω or single coil 500 Ω. 18/6.
VENNER TIME SWITCHES. For switching on/off lighting and power. Reconditioned as new. In ironclad cases. 10 amp., 75/-; 15 amp., 85/-; 20 amp., £5/5/-.
TELEPHONE DIALS. 0-9. Suitable for inter-office and factory installation. 17/6.
4-OHM P.M. SPEAKERS. In good working order, 10in. 27/6; 8in. 9/6; 6in. 9/6; 5in. 11/6. 3½in. P.M. SPEAKERS. 3Ω. 17/6.
SYNCHRONOUS VIBRATORS. 2 v. 7 pin. 8/6.
ELECTRICITY SLOT METERS. (1/- in slot.) for A.C mains. Fixed tariff to your requirements. Suitable for hotels, etc. 10 A., 84/-; 15 A., 94/-; 20 A., 104/-. Other amperages available. Reconditioned as new.
QUARTERLY ELECTRIC CHECK METERS. Reconditioned as new. 10 A., 42/6; 15 A., 52/6; 20 A., 57/6. Other amperages available.
HIGH RESISTANCE EARPIECES. Double with 3ft. length of cord. 10/6 pair.
BALANCED ARMATURE HEADPHONES, with throat tubes. 9/6.
ASSORTED RESISTANCES. Accuracy ±5%. 5/6 per 100.
FREQUENCY METERS. 0-3,500, 25/-, new and boxed.
THROAT MICROPHONES. 3/- each.
SOUND-POWERED HAND SETS. 17/6.

All prices include carriage

23 LISLE ST. (GER 2969) **LONDON, W.C.2**

Closed Thursday 1 p.m. Open all day Saturday

CLEAN AND SILENT D.C. to A.C.

UP TO 100 WATTS

WITH THE FELGATE ELECTRONIC INVERTER MK II

FROM 210/250 VOLTS D.C.
NO MOVING PARTS
FREQUENCY CONTROL
Manufactured by
McCARTHY
RADIO AND ELECTRONICS LIMITED
STUDLAND HALL, STUDLAND STREET LONDON, W.6.

EDDY'S (NOTTM) LTD.

172 ALFRETON ROAD, NOTTINGHAM

GUARANTEED NEW OR SURPLUS VALVES BY RETURN OF POST

CY31 ...	12/6	EZ81 ...	6/9	3D6 ...	4/11
DAF91	4/9	GT1C ...	4/11	3Q5GT	8/6
DAF96	6/11	MU14 ...	7/-	3S4 ...	5/11
DF91 ...	3/11	KT33C ...	6/6	3V4 ...	6/9
DF96 ...	6/11	PCC84	7/3	5R4G ...	9/6
DK91 ...	5/6	PCC89	7/3	5Y3G ...	5/9
DK96 ...	6/11	PCF80	7/3	5Z4G ...	7/6
DL96 ...	6/11	PCF82	7/6	5Z4M ...	11/-
DM70 ...	7/6	PCL82 ...	7/6	6A7 ...	10/-
EABC80	7/6	PEN25...	4/6	6AG5 ...	4/-
EAF42...	8/6	PEN36C	8/-	6AQ5 ...	6/-
EB34 ...	1/3	PEN46...	5/6	6AT6 ...	7/-
EB41 ...	6/11	PL36 ...	10/9	6B8G ...	2/11
EB91 ...	3/6	PL81 ...	9/-	6BA6 ...	5/11
EBC41 ...	7/6	PL82 ...	7/-	6BJ6 ...	5/11
ECC35 ...	6/9	PL83 ...	7/-	6BJ7 ...	5/11
ECC81 ...	5/3	PL84 ...	9/6	6C4	3/6
ECC82	5/11	PY80 ...	7/-	6C4	4/9
ECC83 ...	6/6	PY81 ...	6/3	6F4M ...	7/-
ECC84...	8/3	PY82 ...	6/3	6F33 ...	6/9
ECC85...	7/11	PY83 ...	6/3	6J5G ...	2/9
ECH42	9/11	TY86F...	11/6	6J5GT ...	3/9
ECL80 ...	7/-	U25 ...	12/6	6J5M ...	4/3
ECL82	10/-	UBC41 ...	7/3	6K7G ...	1/11
EF36 ...	3/-	UCH42	7/9	6K8G ...	5/3
EF37 ...	7/11	UF41 ...	7/9	6Q7G ...	5/9
EF42 ...	7/6	UF42 ...	6/3	6SA7M ...	5/9
EF50 ...	1/9	UL41 ...	7/3	6SG7M...	4/9
EF80 ...	5/-	UY41 ...	6/-	6U4GT	10/6
EF86 ...	9/9	UY85 ...	6/3	6V6GT...	6/-
EF89 ...	7/-	VT52(4-pin)		6V6G...	4/11
EF91 ...	3/6		2/6	12A6 ...	5/3
EF92 ...	4/6	VR150/30	5/6	12AT6 ...	7/6
EL41 ...	7/3	1A7GT	11/9	25L6GT	8/11
EL42 ...	9/3	1C5GT...	9/9	35L6GT	8/11
EL84 ...	6/6	1D5 ...	7/6	954	1/6
EL85 ...	10/6	1L4 ...	3/6	955	3/6
EF91 ...	3/6	1N5GT	9/9	956	2/6
EY51 ...	7/11	1R5 ...	5/6	9001 ...	3/11
EY86 ...	7/9	1S5 ...	4/9	9004 ...	3/11
EZ80 ...	6/-	1T4 ...	3/11	9006	3/11

CAR RADIO KITS. 7 Transistors. Long and Medium, 2 watts output. R.F. stage and auto. gain control, 10½ gns. P. & P. 5/-. 6 or 12 v. (state which), supplied with full instructions. Size 7½ x 7½ x 2½in. Speaker extra 17/11.

GUITAR PICK-UPS. Super Hi-Fi non-acoustical, universal fitting, High Output. Complete with lead and plug. Full and easy instructions, 49/11. P. & P. 2/6.

NIFE ACCUMULATORS. 1.25 v. Size: 3 x 2½ x ¼in. 7 amp. hrs. Weight 13 ozs. 1/11 each. P. & P. 1/6 one only, add 9d. per cell.

DYNAMOTORS. 200 v. D.C. to 12 v. D.C. deal for train sets, etc., 19/11. P. & P. 2/6.

POCKET RADIO. 2 Transistors with miniature speaker, 2 wavebands. Complete with all parts, wiring diagram and full instructions, 27/6. Batteries 1/-. P. & P. 1/6.

RECTIFIER/STABILISER. 1.4 volt valves. Midget 3/-. Post 6d.

VIBRATORS. 12 volt 4-pin, 4/11. Post 1/-.

TRANSISTORS. Red Spot 3/6. White Spot, 4/11. Post 6d.

HANDMIKES. Carbon, 7/11. Post 1/9.

2,000 mfd. CONDENSERS. 3 volt working, 1/6. Post 9d.

VALVE FILAMENT TESTER. Pocket size, battery operated, checks valves, circuit continuity, pilot lamps, etc., fully guaranteed, 30/- complete. P. & P. 2/6.

ALL ABOVE ARE NEW AND GUARANTEED.

All parcels insured against damage in transit for only 6d extra per order. All uninsured parcels at customer's risk. Postage and Packing 6d. per valve extra. C.W.O. or C.O.D. only. C.O.D. charge 3/- extra.

S.A.E. with enquiries.

Z. & I. AERO SERVICES LTD.

Head Office: 14 South Wharf Road, London, W.2

Tel.: AMBassador 0151/2 **Cables: ZAERO, LONDON**

A.R.B. Approved Stockists

RETAIL BRANCH (personal callers only): 85 TOTTENHAM COURT ROAD, W.2. Tel.: LANgham 8403

Please send all enquiries, correspondence and Mail Orders to Head Office

AUDIO FREQUENCY EQUIPMENT

B.S.R. TYPE LO-50 Beat Frequency Oscillators. Frequency Range 0-16,000 c/s; output .5 watt; calibration accuracy 1%. Distortion better than 1%. Two-dial differential tuning. Mains operation. Output Impedance 600Ω. Output Voltage 20V. open circuit. P. & P. 15/-. **£30 0 0**

B.S.R. TYPE LO-500B OSCILLATOR. Frequency Range 0-50,000 c/s; output 5 watts max. Calibration Accuracy ±1%. Two-dial differential tuning. Outlets available: Direct Transformer output 15Ω, 1000Ω and 5000Ω; 600Ω attenuated loaded or unloaded output and .6Ω output. Stepped Attenuator 0-100 db. Mains operation. £30. P. & P. 30/-.

FURZEHILL B-C OSCILLATORS: four ranges 40 to 10,000 c/s; output 0.5 watts; output voltage 25V for 600Ω; Impedance 10, 600 and 5,000Ω. Mains operation. £25. P.P. 15/-.

FURZEHILL No. 1 BEAT FREQUENCY OSCILLATOR. 0-10,000 c/s.; Output 2 watts into 10 or 600Ω. Mains operation. P.P. 15/-. **£22 10 0**

HEWLETT PACKARD MODEL 200A. Resistance tuned Oscillator with a frequency range of 25 to 35,000 c/s in three ranges. Max. output 1 watt into 500 ohms with distortion not exceeding 0.5%. Output is not metered. Powre Supplies 115 V. A.C. PRICE. P.P. 15/-. **£28 0 0**

HEWLETT PACKARD MODEL 204AG. Resistance Tuned Oscillator with a frequency range of 20 c/s. to 20 kc/s. in three bands. Output 5 watts into 50, 200, 600 and 5,000 ohms with distortion not exceeding 1%. Output Meter; Input Meter. Calibrated Attenuator. PRICE **£35 0 0**

Packing and carriage £1 0 0

MARCONI TF-1064. BEAT FREQUENCY OSCILLATORS. Frequency Range 0-40,000 c/s. Output 2 watts into 600 and 2,500Ω. Calibration Accuracy ±2% ±2 c/s. Mains operation. P.P. 20/-. **£65 0 0**

MARCONI TF-886A VIDEO OSCILLATOR. Frequency 25 c/s. to 5 Mc/s. sinewave and 50 c/s. to 150 kc/s. squarewave output. Max. output 1W/1,000Ω sinewave, and 32V peak/1,000Ω squarewave. 11-step attenuator calibrated in Volts and dB. 100/125 and 200/250 v. A.C. Mains operation. P.P. 20/-. **£150**

GENERAL RADIO TYPE 700A WIDE RANGE BEAT FREQUENCY OSCILLATOR. Range 50 c/s. to 5 mc/s. in two ranges; Incremental frequency control. Output Impedance 3,500Ω. P.P. 20/-..... **£70 0 0**

DAWE INSTRUMENTS TYPE 400C WIDE RANGE RESISTANCE TUNED OSCILLATOR. Frequency Range .1 to 1000 c/s. in two ranges. Accuracy ± 2% from 1 to 1000 c/s and ± 10% from .1 to 1 c/s. Output 100mW into 10,000 balanced. Total Harmonic Distortion 3%. Monitoring 1in. Cathode Ray Tube. P.P. 15/-. **£70**

MARCONI TF-142E DISTORTION FACTOR METERS. Fundamental Frequency Range 100-8,000 c/s.; Distortion Factor Range 5% and 50%. First reading at .05%. Impedance 600Ω. Power Supplies 200-250V. Mains. operation. P.P. 20/-. **£65 0 0**

DAWE INSTRUMENT TYPE 700A DISTORTION FACTOR METER. Frequency range 100 to 8,000 c/s. on fundamentals; Distortion range .1 to 50% with an accuracy of 10%. Input impedance 600Ω. Sensitivity 1 milliwatt. Battery operation. P.P. 20/-.. **£60 0 0**

R.C.A. TYPE 88C NOISE AND DISTORTION METER. Direct measurements of Noise level from 0 to - 72 dB. and measurements of Distortion from 0.3 to 100%, when used with a low distortion Oscillator Frequency Range from 0 to 40,000 c/s. P. & P. 20/-..... **£55 0 0**

WAYNE KERR TYPE A201 WAVEFORM ANALYSER. Frequency range 20 c/s to 20 kc/s in two bands. Input voltage 50 mV to 25 V approx. Input attenuator. Harmonic measurements range from −55 to +1 db. Mains operation. P.P. 15/-..... **£110 0 0**

GUNN ABSORPTION AUDIO FREQUENCY METERS. Variable Capacitor tuned L-C Resonant Circuit. Detector and Valve Voltmeter Stage. Microammeter resonance indicator. Range 450 c/s. to 22.0 kc/s. in four directly calibrated bands. Power required: dry batteries 1.5 V. and 22.5 V. P.P. 15/-. **£22 0 0**

OSCILLOSCOPES

COSSOR DOUBLE BEAM Type 339 ..... **£30 0 0**

DUMONT SINGLE BEAM Type 186, 5in. Tube. Time Base up to 30 kc/s., 115 V. operation **£25 0 0**

DUMONT SINGLE BEAM Type 241, as above **£25 0 0**

DUMONT SINGLE BEAM Type 208, 5in. tube. Time Base up to 50 kc/s. **£30 0 0**

AIRMEC Type 830 SINGLE BEAM. Time Base range .05 sec. to 1.5μsec. triggered or free-running. Frequency response 30 c/s. to 20 mc/s. on low gain and up to 1 mc/s. on high gain. Adjustable E.H.T. Voltage. Mains operation **£110 0 0**

AIRMEC TYPE 723 SINGLE BEAM. Time Base 1μsec. to 5 millisec sweep, triggered or free-running. Amplifier Frequency Response D.C. to 5 mc/s. for sensitivity of 200 mV/cm. and 30 c/s. to 30 kc/s. for sensitivity of 30 mV/cm. Automatic brilliance control. Adjustable EHT Voltage. Mains operation ... **£75 0 0**

COSSOR TYPE 1035 DOUBLE BEAM. Time Base 15μsec. to 150 millisec. triggered or free running. V1 Amplifier gain 3 to 2,000, with frequency response up to 7.0 mc/s. for low gain and up to 60 kc/s. for high gain. V2 Amplifier directly calibrated in Volts. **£100 0 0**

EMI TYPE 3794TA HIGH SPEED WAVEFORM VIEWING OSCILLOSCOPE. Time Base 1.5μsec to 50 m/sec. triggered or free running. "Y" amplifier provides sensitivity of 2 to 120 mm/V. Time rise .07μsec. Frequency response D.C. to 5 mc/s for 2.5 db down. Time measurements range .1μsec. with an accuracy of ±2%. Voltage measurements range 0-500 V. D.C. or R.M.S. in six ranges, with accuracy of ±3% F.S.D. Mounted on a trolley, with mains power supply unit. P.P. 50/- **£90 0 0**

TS-239/UP HIGH SPEED OSCILLOSCOPE. Single Beam. Sinewave observable to 10 c/s. to 5 mc/s. Minimum rise time .05μsec. Sweep time .5μsec. to 50,000 μsec. triggered or free-running. Calibrating Voltage .1 to 1V peak. Brightness modulated timing marks of .3-1-10-100-500μsec. Sensitivity .1 to 100 V for an image size of .5in. Illuminated graticule with adjustable brightness. 115 V. operation. Complete with accessory cables and probe **£135 0 0**

R.C.A. TYPE 327A SINGLE BEAM 5in. OSCILLOSCOPE. Time Base Range 1 c/s. to 50 kc/s. Sensitivity .1 to 100 V. per 6in. deflection. Identical "X" and "Y" Amplifiers. Push-button "X" and "Y" Attenuators. DC Voltmeter for Voltage measurements. This oscilloscope is especially suitable for demonstration purposes **£35 0 0**

TS-34/AP PORTABLE OSCILLOSCOPE. 2in. Cathode Ray Tube magnified to 3in Field Time Base 10 to 50,000 c/s. free running and 5, 50 and 250μsec. single stroke sweep 1μsec. internal calibrating pulse. Input .3 to 1 V. for 1in. deflection max. 115 V. A.C. operation. Complete with cables and probe .. **£50 0 0**

Packing and carriage £1 per instrument.

"MEASUREMENTS CORPORATION" TYPE 84 "STANDARD" SIGNAL GENERATOR

Range: 200-1,000 Mc/s. Direct Calibration.

Accuracy: 0.5%.
Output Level: 0.1μV-100 mV. continuously variable.
Internal Modulation:—
Sinewave—30% Max. at 400, 1,000 and 2,500 c/s.
Pulse—1 to 50μsec., width delay variable from 0 to 50μsec., p.r.r. 60 to 100,000 c/s.
Output Impedance—50 ohms.
Percentage Modulation Meter.
PRICE, in as new condition, tested before despatch and fully guaranteed **£290 0 0**
Packing and carriage £2 0 0

HETERODYNE WAVEMETERS

TS-175 Heterodyne Crystal Controlled Frequency Meters, range 90 to 450 Mc/s. Individual Calibration Books with numerous crystal check points. Accuracy .005% nominal and .01% interpolation. Power required: dry batteries 6 V. and 135 V. PRICE..... **£190 0 0**

MARCONI TYPE TF-783 PRECISION HETERODYNE WAVEMETER. Range 3 to 18 Mc/s. on fundamentals, extendible to at least 30 Mc/s. by using harmonics. Accuracy better than .005%. Crystal Reference Oscillator giving check points every 20 and 200 kc/s. Direct calibration with linear interpolation. Power supplies 230 V. mains. PRICE..... **£75 0 0**

ALSO BC-221 and LM-14 FREQUENCY METERS. Prices and details on application.

"HIVOLT" TYPE 105PZB HIGH FREQUENCY HIGH VOLTAGE POWER SUPPLY UNIT. This unit will provide H.F. voltage continuously variable from 0 to 30kV. Mains operation. P.P. 20/-. **£65 0 0**

PEN RECORDERS

EVERSHED PORTABLE RECORDING VOLTMETERS.

150V D.C. 3in. chart, clockwork chart drive, two speed, 1in. and 6in. per minute **£30 0 0**

50mV. D.C., ditto **£30 0 0**

150mV. D.C., ditto **£30 0 0**

EVERSHED SWITCHBOARD PATTERN RECORDING MILLIAMMETERS

Single Pen 2.5-0-2.5mA. D.C. Centre zero, electric chart drive, 230 V. A.C. at 3in. per minute. 6in. chart. **£45 0 0**

Single Pen 5mA D.C. Electric chart drive 230V. A.C., 1in. per minute, 6in. chart width; fully rebuilt and guaranteed **£50 0 0**

Single Pen 1 mA. D.C., otherwise as above £53 10 0

Single Pen 1mA or 5mA Range, fitted with "operation" pen to mark the beginning and end of an event, the magnitude of which is recorded by other pen. Operation pen is energised from an internal transformer by shorting the external leads. Fully rebuilt and guaranteed.

1mA. Range **£58 10 0**

5mA. Range **£55 0 0**

Twin Pen 5mA. D.C. Electric chart drive 230V. A.C. Chart speed 1in. per minute, 6in. chart width, fully overhauled and guaranteed **£65 0 0**

Ditto 1mA. D.C. **£72 0 0**

ELLIOTT SINGLE PEN SWITCHBOARD PATTERN RECORDING MILLIAMMETERS

Single Pen 5mA D.C. Electric chart drive 230V. A.C., 6in. chart width, speed 3in. per minute. **£45 0 0**

Ditto 1mA. D.C. **£48 10 0**

CAMBRIDGE 4-decade WHEATSTONE BRIDGES. 10-10-100-1000Ω decades; Ratio Arms 1-10-100-1000Ω. Built-in suspension Galvanometer and Battery and Galvanometer Keys. PP. 15/-..... **£50 0 0**

MARCONI TYPE TF-886A CIRCUIT MAGNIFICATION METER. Frequency Range 15 to 170 mc/s. in four ranges ±2%. Magnification Range 50 to 1,200 in three ranges. Tuning Capacitor 12 to 85μμF with Vernier Tuning Dial. P.P 20/-. **£130 0 0**

B.T.H. "X" BAND PERFORMANCE TESTING RESONATOR (ECHO BOX)

Directly calibrated frequency dia., graduated from 9,170 to 9,470 Mc/s. Graduated Attenuator; Microammeter Resonance Indicator; complete with R.F. Cable and Waveguide Adaptor.

PRICE £28 0 0
P. and carr. 15 0

ALL THE ABOVE EQUIPMENT IS FULLY OVERHAULED TO MANUFACTURERS SPECIFICATION AND FULLY GUARANTEED FOR SIX MONTHS FROM THE DATE OF PURCHASE.

V.H.F. RECEIVER UNITS BC-434

(part of SCR-522 Transmitter-Receiver)

4 Crystal controlled channel. 100-156 Mc/s. (3.0-1.92 metres). Valves: 9002 R.F. stage; 9003 Mixer; Three I.F. stages 12SG7; Det/AVC/Audio 1SC8; Second Audio 12J5GT; Oscillator 2AH7GT, Harmonic Generator 9002; Harmonic Amplifier 9003; Audio Squelch—other section of 12AH-7GT. High and Low Impedance output. PRICE complete with valves, with description and circuit diagram, but without squelch relay 25/-, p.p. 5/-. PRICE, chassis only, less valves 7/6, p.p. 2/6.

ALSO LIMITED QUANTITY ONLY:

TRANSMITTER UNITS BC-625

(part of SCR-522 Radio Set)

Valves: Speech Amplifier 6057; Push-Pull Modulator (use 12A6); Oscillator 6146G; 1st Harmonic Ampl. 12A6; 2nd Harmonic Ampl. 832; Power Ampl. 832. Output 8 watts.

PRICE, complete with valves, description and circuit diagram ..... p.p. 5/- 22/6

Price, chassis only, less valves ..... p.p. 2/6 7/6

Descriptions and circuits available at 6d. each.

RATCHET MOTORS, 12 v

1 Amp. (Impulse Motors) 8.75 ohms ..... 3/6 each

Packing and postage 1/6

D.C. SOLENOIDS

Type 700-28 Push-Pull Type, 24-28V, 1 Amp. holding force 12 lbs.; stroke 5/16in. Flange Mounting: Dimensions: 2¼in. high × 2in. × 2in. ..... 6/6, p.p. 2/-.

Type 127 Push-Pull Type: 26V. 12 Amps; Holding Force approx. 40 lbs.; Stroke ¼in.; Dimensions 3¼in. high × 2¼in. × 2¼in. ..... 8·6, p.p. 2/-.

Type 768-2, Pull Type, 26V. 17.5 Amps; Holding Force approx. 50lbs.; Stroke ¼in. Dimensions 3in. high × 2¼in. × 2¼in. Flange Mounted .... 8·6 p.p. 2/-.

VERNER 8-day clockwork time switches. 24-hour dial with one make and one break. 1 amp. 230V. contacts. Second-hand, good condition, complete with winding key. ..... p.p. 2/- 27·6

P.O. BUZZERS

Post Office Buzzers model T Mk. 1. Minimum operating voltage 3 volts. PRICE (p.p. 1/6). 4/6

3-RANGE MICRO-MILLIAMMETER

Basic movements 50μA D.C. M.C. Ranges of 50μA, 250μA and 1mA switched by a trigger switch in the back, geared with sliding scale having separate graduations for each range. Instrument is fitted with leads for soldering to test prods or crocodile clips (not supplied) 50/-

WESTINGHOUSE SELENIUM RECTIFIER POWER UNITS

Input 115/230V., fully smoothed and fused. Output adjustable from 80 to 140V. D.C. by means of fine and coarse tap switches in the secondary winding. Maximum current 400mA. continuous. Dimensions: 17¼in. × 10¼in. deep × 8¼in. high ..... p.p. 7/6 40/-

AVO CR BRIDGES

Portable Mains Operated Serviceman's Component Bridge. Ranges of measurements: Capacity from 5mm.F. to 50 mF.; Resistance from 5 ohms to 50 megohms. Valve Voltmeter from 0 to 15 V. RMS: Neon Leakage Indicator. Power Factor measurements in %.

PRICE ..... p.p. 10/- £9

NEW FOREIGN MADE POCKET MULTIMETERS



Basic Movement 200μA. Sensitivity 1,000Ω/V. A.C. and D.C. Ranges: 10-50-250-500-1,000V. D.C. and A.C. 1-100-500mA. D.C. 2K/200K ohms. Accuracy: 3% FSD and D.C., 5% FSD on A.C. 10% on Resistance scale. Dimensions: 5¼in. × 3¼in. × 2¼in. Complete with test leads with prods and 1.5V cell, fully guaranteed 80/-.

REVERSIBLE 12 V. D.C. MINIATURE MOTORS

Power approx. 5 watts at 7,000 R.P.M. Dimensions 1¾in. long × 1¼in. dia. Shaft .077in. dia. × 4in. long. Centre of reversing switch integral with the motor. Self-lubricating sintered bronze bearings. PRICE, brand new, 13/6 post free.

PORTABLE METERS

EX-A.M. 150 Volts D.C. M.C., in bakelite cases, with side terminals. Dimensions: 4¼in. × 4¼in. × 3¼in. deep. PRICE ..... 35/-, p.p. 2/6.

500μA D.C., M.C.: 3¼in. Sq. Fl. Meter mounted in a waterproof die-cast case fitted with rubber feet and carrying handle. Phone jack connection. Dimensions 6in. wide × 6in. high × 3¼in. deep. Unused. P.P. 2/6. £3

180V AC/DC M.I. MIRROR SCALE, dimensions 9in. × 6in. × 3¼in. Unused ..... p.p. 5/- £5.

TURNER MODEL 22 6in. RD.FL. METERS, mirror-scale, mounted in wooden boxes with leads; dimensions 8¼in. × 9in. × 4¼in.:

1 mA. D.C.	£8 0 0
10 mA. A.C. Rectifier	£8 0 0
100 mA. D.C.	£6 0 0
250 mA. A.C. Rectifier	£8 0 0
10A and D.C.	£6 0 0
17. D.C.	£8 0 0
50 V. A.C. Thermocouple	£10 10 0
100 V. A.C. Thermocouple	£10 10 0
200 V. A.C. Thermocouple	£10 10 0
300 V. A.C. Thermocouple	£10 10 0

Packing and Postage 7/6.

WESTON MODEL 155 M.I. MIRROR SCALE, dimensions 7¼in. × 6¼in. × 3¼in. Range 150 Amps. p.p. 5/- £5

AIRMEC TYPE 868 STABILIZED POWER SUPPLY UNIT. This power unit will provide all the necessary voltage for a klystron. Cathode-Volts 1.0 to 2.4 kV.; Grid-to-Cathode: 0 to 220 V.; Reflector-to-Cathode 0 to 550 V.; Cathode current 18 mA. max.; Heater supplies 4 V. at 1.5 A. max.; Internal modulation square-wave at 2 to 4 kc/s., 70 V. peak-to-peak, sawtooth 100 to 600 c/s., 0 to 30 V. peak. Ripple 10 mV. H.T. and 150 mV. L.T. Mains operation 210-250 V. A.C. p.p. 20/-. £50 0 0

TESTED AND GUARANTEED VALVES

OA2 .. 6/-	5T4 .. 9/-	6L5G 8/-								AC/SP3 4/6	KL35 15/-
OC3/VR105 5/6	5U4G 5/-	6L6 .. 9/-								ACT-19 90/-	KL84 7/-
OD3/VR150 5/6	5V4G 9/-	6L6G 7/-								ARD36 1/6	KT2 10/-
	5Y3GT 6/-	6L7 .. 5/-	24G 30/-	801A/801 .. 22/-	832 .. 15/-	1625 6/-	5517 6/-	5725 7/-		ARP34 4/-	KT61 9/-
	5Y4G 5/6	6L7G 4/6	25Z6GT 6/-	832A 35/-	1616 .. 7/-	5651 6/-	5763WB			ARP35 4/-	KT66 10/-
1A3 .. 3/-	5Z3 .. 7/-	6N7G 5/-	28D7 7/-	807(UK) 9/-	2050 7/6	5654 10/-				ARTB9 7/-	KT88 25/-
1AH4 5/-	5Z4G .. 5/-	6Q7G 5/-	39/44 3/-	931A 60/-	4033A 15/-	5678 7/-	5786 200/-			ATP4 5/-	KTW61 9/6
1L4 .. 3/6	6A8 .. 5/-	6R7G 5/-	41 .. 7/-	956 .. 12/6	4033L 30/-	5687 10/-	5787 10/6			AW3 4/6	KTZ41 1/6
1Q22 100/-	6AB4 5/-	6S7G 6/-	42A .. 3/-	958 .. 4/-	4042 15/-	5688 20/-	5814 9/-				KT8SC 6/-
1R4 .. 7/-	6AC7 2/-	6SA7 6/-	64G(HK) 5/6	811A 30/-	4062 15/-	5692 25/-	5829 5/-			ATR257 70/-	KT63 6/-
1R5 .. 6/-	6AG5 3/6	6SA7T 7/-	813 .. 70/-	866 .. 9/-	4061A 12/6	5702 15/-	5839 5/-				KT66 12/6
1S5 6/-	6AG7 6/-	6SC7 7/-	815 .. 40/-	957 .. 5/-	5702 15/-	5718 6/-	5930 25/-				KT81 17/6
1T4 .. 5/-	6AK5 5/-	6SG7 6/-		1005 35/-	4342A 35/-					C3R14 10/-	KT2S3 9/-
1U5 .. 6/-	6AL5 4/-	6SH7 4/-								CK522AX 10/-	LA8 6/-
1V2 .. 4/-	6AM5 5/-	6SJ7 5/-								DAF96 7/6	MH4 6/-
2C26 9/-	6AM6 4/6	6SK7 5/6								DF96 7/6	MHL4 5/6
2C26A 5/-	6AQ5 7/-	6SN7GT								DH63 6/-	ML6 6/-
2C34 4/6	6AQ6 7/-	4/-								DL94 6/6	PEN44 20/-
2C39A 5/-	6AR5 4/-	6SQ7 6/-								DL96 7/6	PL81 10/-
100/-	6AT6 5/6	6SR7 5/6								DL98 7/-	PL82 12/-
2C40 40/-	6AU6 7/-	6X4 .. 5/-								DL96 7/6	PL83 8/6
2D21 6/-	6AV6 6/-	6X5GT/G 5/-								DAL90 8/-	PL81 10/-
2X2 4/-	6B4G 4/-	5/-								DAC32 11/-	PL83 8/6
2A4 .. 5/-	6B7 .. 6/-	6V6GT 5/6								EA50 4/-	PT15 15/-
2A5 .. 5/-	6B8 .. 6/-	6Z4 .. 6/-								EAC91 4/-	PT81 6/6
3B23 20/-	6B8G 3/6	7A4 .. 4/-								EB91 5/-	PY81 6/6
3B24 3/6	6BE6 5/-	7AG7 5/-								ECC81 6/-	PY82 7/-
3B26 20/-	6BN6 7/-	7C7 .. 5/-								ECC82 6/-	QQV03-10 40/-
3B29 30/-	6C4 .. 2/-	7E5 .. 5/-								ECC83 7/-	X66 10/-
3C45 30/-	6C6 .. 4/-	7F7 .. 5/6								ECC84 8/-	CV25 15/-
3D6 .. 4/-	6C8G 7/-	7W7 .. 6/-								ECC85 8/-	CV29 30/-
3D21 20/-	6C9G 7/-	11E3 20/-								ECF80 10/6	CV-92 40/-
3E29 60/-	6D4 10/-	11E3 20/-								ECC91 3/6	CV117 30/-
3Q4 .. 7/-	6F6 .. 5/-	12AH7GT								ECF82 10/6	CV-303 10/-
3S4 .. 5/-	6F8G 6/6	4/6								ECL80 10/-	CV233 3/-
3TF7 7/6	6G6G 2/6	12AT7 6/-								EF40 6/-	CV1039 30/-
4B26 15/-	6H6 1/6	12AU7 6/-								EF50 1/6	CV2206 5/-
4C35 60/-	6J5 4/6	12AX7 7/-								EF50 5/-	CV4014 10/-
4E27 60/-	6J5G 3/-	12C8 8/-								EF85 7/-	CV4025
5B21 20/-	6J6 3/6	12H6 3/-								EF91 4/6	U19 17/6
5B/502A 80/-	6K7 .. 5/-	12J5GT 1/6								EF92 3/6	UF89 7/6
5R4GY 9/-	6K7G 4/-	12SH7 3/-									
	6K8 .. 9/-	14A7 6/-									

U14 8/-													
VGT138 10/-													
VR21 2/6													
VR35 5/-													
VR53 4/-													
VR54 1/6													
VR65 4/-													
VR92 1/-													
VR-100 7/-													
VR133 2/6													
VR136 4/-													
VR137 5/-													
VS60 4/6													
VT91 50/-													
VT98 4/6													
VT61 7/-													
VT501 3/-													
VU39 7/-													
VU111 4/-													
VU-120 4/6													
VX3208 5/6													
VX5190 5/6													
VX5143 5/6													
Z21 10/-													
X66 10/-													
CV25 15/-													
CV29 30/-													
CV-92 40/-													
CV117 30/-													
CV-303 10/-													
CV233 3/-													
CV1039 30/-													
CV2206 5/-													
CV4014 10/-													
CV4025 10/-													

CATHODE RAY TUBES

Type	dia.	V_h	V_{a1}	V_{a2}	V_g	Screen	Ded.	Focus	Price
3ACP2	3in.	6.3	545V	2,000V	66V	Gr.	ES	ES	20/-
3BP1	3in.	6.0	575V	2,000	60	Gr	ES	ES	17/6
5FP7	5in.	6.3	350V	7,000V	45	Gr/Y	EM	EM	12/6
5SP7*	5in.	6.3	450V	1,500V	38	Gr/Y	ES	ES	140/-
7BP7	7in.	6.3	330	7,700V	45	Gr/Y	ES	EM	45/-
7BP7A	7in.	6.3	770	8,800V	70	Gr/Y	EM	EM	60/-
10UP21	10in.	6.3	770	13,000V	70	Y/R	EM	EM	70/-
12SP7	12in.	6.3		9,000V	300	G/Y	EM	EM	40/-
CV961	7in.	4.0	450	500	70	Gr.	ES	ES	25/-
CV956**	12in.	4.0	1,700	1,200	90	Gr.	ES	ES	15/-

STEEL SCREENS FOR 3in. TUBES ..... 5/- P.P. 9d.

*Twin Gun

**Complete with mu-metal screen.

Packing and carriage 2/- in £ subject to a minimum of 2/6.

KLYSTRONS

Type	V_b	V_{res}	P_{res}	Output	Freq.	Price
417A	6.3	1,000	50W	25mW	9.1-11.5cm	40/-
723A/B	6.3	250		20mW	8,702-9,548mc	50/-
CV129	4.0	1,500	16W	75mW	9,375mc mean	90/-
CV233	4.0	250	5W	100mW	3,030mc mean	40/-
CV35	4.0	1,250	10W	10mW	3,033mc mean	100/-
CV317	4.0	1,250	10W	15mW	9,738mc mean	40/-

MAGNETRONS

5J30, Vh 2.9Va 2,500 peak, 1,500 gauss, output 150 Watts, frequency 375mc mean, liquid cooled, 40/-.

714A/Y, Vh 6.3V, Va 22kV pk., 2350 Gauss, mean frequency 3300mc/s. 200/-.

7C .. 5/-	
83 .. 10/-	
83V .. 9/-	
349B 25/-	
723A/B 6.3 250 20mW 8,702-9,548mc 50/-	
417A 6.3 1,000 50W 25mW 9.1-11.5cm 40/-	
CV129 4.0 1,500 16W 75mW 9,375mc mean 90/-	
CV233 4.0 250 5W 100mW 3,030mc mean 40/-	
CV35 4.0 1,250 10W 10cmW 3,033mc mean 100/-	
CV317 4.0 1,250 10W 15cmW 9,738mc mean 40/-	
350A 15/-	
357A 80/-	
559 3/-	
702A 20/-	
705A 15/-	
717A 4/-	

1625 6/-	
1616 .. 7/-	
2050 7/6	
4033A 15/-	
4033L 30/-	
4042 15/-	
4061A 12/6	
4342A 35/-	
5517 6/-	
5651 6/-	
5654 10/-	
5678 7/-	
5687 10/-	
5688 20/-	
5702 15/-	
5718 6/-	
5725 7/-	
5763WB	
5786 200/-	
5787 10/6	
5814 9/-	
5829 5/-	
5930 25/-	

5852 10/-	
5899A 10/-	
5963 7/-	
6064 10/-	
6065 10/-	
6213 15/-	
7193 2/-	
8016 5/-	
9001 4/-	
9003 5/6	
9003 6/-	
EF50 1/6	
EF50 5/-	
EF85 7/-	
EF91 4/6	
EF92 3/6	
UF89 7/6	

We have hundreds of other types in stock. Please send s.a.e. for current price list. Please add 2/6 in £ for packing and postage.

WE URGENTLY REQUIRE AND PAY HIGHEST PRICES FOR MODERN TEST EQUIPMENT (e.g., Signal Generators, Oscillators, Microwave Test Sets, etc.). COMMUNICATIONS RECEIVERS (especially U.H.F. and E.H.F. Ranges), AIRCRAFT RADIO COMMUNICATION AND RADIO NAVIGATION EQUIPMENT, SPECIAL VALVES, MAGNETRONS, KLYSTRONS, ETC.

EX A.M. RECEIVERS TYPE R-1359, HALLICRAFTER 527C RECEIVERS (Range 130-210 Mc/s) AND UNMODIFIED BC-348 RECEIVERS REQUIRED IMMEDIATELY.

Z. & I. AERO SERVICES LTD.

RETAIL BRANCH: 85 TOTTENHAM COURT ROAD, W.2. Tel.: LANgham 8403

Head Office: 14 SOUTH WHARF ROAD, LONDON, W.2. Tel.: AMBassador 0151/2

Please send all correspondence and Mail Order to the Head Office.

TV TUBES

EXACT PLUG-IN REPLACEMENTS

ALL makes and ALL types from stock

12" - - - £4-15-0
14" - - - £5- 9-0
15"-17" - - £5-15-0

COD or CWO. Carriage and Ins. 7/6.

10/- GLADLY REFUNDED ON 14", 15", 17" SIZES IF YOU RETURN YOUR OLD TUBE.

FACTORY REPROCESSED AND COMPLETELY AS NEW

12 MONTHS' NEW TUBE GUARANTEE

NEW GETTERS RE-GRAPHITED

MICRO-FINE ALUMINISED

FITTED NEW MULLARD MAZDA EMISCOPE ETC. ELECTRON GUNS

NEW SILVER ACTIVATED SCREEN

ALL MATERIALS AND COMPONENTS USED IN THE MANUFACTURE OF THESE TUBES ARE COMPLETELY NEW EXCEPT THE GLASS ENVELOPE WHICH PRIOR TO MANUFACTURE WAS CAREFULLY INSPECTED TO MEET THE STANDARD OF THE ORIGINAL NEW ENVELOPE.

LAWSON TUBES

156 PICKERSLEIGHS ROAD
MALVERN, WORCS. MAL. 3798

DAMAGED METER?

Have it repaired by Glasers

Reduce overheads by having your damaged Electrical Measuring Instruments repaired by L. Glaser & Co. Ltd.

We specialise in the repair of all types and makes of Voltmeters, Ammeters, Microammeters, Multirange Test Meters, Electrical Thermometers, Recording Instruments, etc.

As contractors to various Government Departments, we are the leading Electrical Instrument Repairers in the Industry. For prompt estimate and speedy delivery send defective instrument by registered post, or write to Dept. W.W.

L. GLASER & CO. LTD.

96-100, Aldersgate Street, London, E.C.1
Tel.: Monarch 6626

POST PAID—CUT PRICE TOOLS

WHIT. OPEN END SPANNERS, drop forged and plated, set 6, ¼in. to ½in., 13/6. **POCKET NEON TESTER,** with retractable screwdriver, 5/-. **6in. SIDE CUTTERS, 5/6. 6in. PLATED ROUND NOSE TAPERED PLIERS, 5/6. 7in. FLAT NOSE BOX JOINT TAPERED PLIERS, 8/6. 7½in. COMBINATION PLIERS, 6/-. TUB. HACKSAWS** (Eclipse Type), 11/6. **H.S. TWIST DRILLS.** Set 7, ¼in. to ½in., 4/-. Full size in wallet, 6/-. Set of 13—9/6. **OUR FAMOUS TRANSFORMERS.** Input 200/250. Output tapped 3 to 30 v. 2 a. or tapped 5, 11, 17 v. 5 a. Each 24/6. P.P. **F.W. METAL RECTIFIERS.** 12/6 volt, 1 a., 7/6; 3 a., 13/-; 4 a., 17/6; 6 a., 27/6; 24 v 2 a., 23/6. **TOGGLE SWITCHES** DPDT 3/6. SP 1/9. **MICRO SWITCHES.** Make and Break, 5/6. **MAINS TRANSFORMER AND RECTIFIER** giving 12 v 1 a. D.C. Output 19/6. P.P. And with Output 30 v. 2 a., 23/6. P.P. **NICKEL MIFE BATTERIES.** 1.2 volt 2.5 amp Size 3×2½×1in. Practically everlasting. 6/- or 3 for 16/-. 4 for 21/-. **Ex.W.D. MORSE KEYS.** 3/3, 6/- and 8/6. **1,000 NEW S.T.C. FREQ. CRYSTALS.** 10,555 k/c to 19,872 k/c 5/6 each. Lists available. **PAXOLIN TUBING.** 1¼in. O.D. ⅛in. thick, 6ft. lengths. 17/6 P.P. Ideal for aerial masts. Stronger than steel. **PAXOLIN PANELS** 12×6×⅛in. 3/6 P.P.

W.W. RHEOSTATS. 1 a., 2/6.

AMERICAN P.V.C. TAPE. Finest quality. 800ft. reels, 19/-.

12 v. MINIATURE RELAYS. 1½×1½×1in. Wgt. 1½ ozs. S.P.C.O. 9/3. S.P.C.O & 3M. 10/6. **UNISELECTOR SWITCHES.** 50 v. D.C. 6 bank 25 way and 3 bank 50 way, all tested and guaranteed, 30/- each, in lots of 25 or more plus carriage. Or 37/- each P.P.

10,000 STROWGER RELAYS. Open to offers. 12 v D.C. **RELAYS.** 2 make 6/-, 2 for 11/6. **Lists sent on request. All post paid.**

THE
RADIO & ELECTRICAL MART

P.O. BOX 9 G.P.O., TUNBRIDGE WELLS, KENT

GUIDE TO THE SPACE AGE

By C. W. Besserer and Hazel C. Besserer

- "Guide to the Space Age" is a comprehensive presentation of the terminology of space technology in dictionary form. Terms are authoritatively defined covering as broad an area as possible and many cross-references, drawings and diagrams are included. First published in America this book will provide a valuable insight into the technical background necessary to understand and evaluate the scientific developments in this new and exciting field. 47/6 net.

From all booksellers

PITMAN

Parker St., Kingsway, London, W.C.2.

SERVO & ELECTRONIC SALES LTD.

SURVIC HOT WIRE VAC SWITCH RELAY CONTROLLERS. F102-3 230 v., load 2 kw., 20/- (3/-). F203-8 230 v., load 7 kw., 45/- (3/-). **2.5 KW. SIEMERSTATS** 15/- (1/6). **HRT RECTIFIERS** 36EHT10 300 v., 4/-, 36EHT20 600 v., 5/-, 36EHT60 1.8 Kv., 10/-, 36EHT160 5.2 Kv., 25/-, 36EHT268 8.5 Kv., 35/-, all at 2 mA. (1/-). **HRT TRANSFORMERS** 230 v. A.C. to 9.5 Kv., 2 mA., herm. sld., 55/- (3/6). **HRT CAPACITORS** Visconol 0.02 full kV., 12/6 (2/6). 0.1μF. 11 Kv., 17/6 (3/6). **ELECTROSTATIC VOLT METERS** 0-15 Kv., E61, mounted in oak carrying case, Everett Edgcumbe, brand new, 27/10/- (3/6). 0-10 Kv. 3½in. flush, TURNER M.23 26/10/- (2/6). **A.C. AMMETERS** 2½in. 0-40 amps., 50 cpe MI, 12/6 (2/-). **MILLIAMMETERS** 0-200 mA., 2½in. flush, 10/- (3/-). **COMMUNICATION RECEIVERS.** Type R.107 1.3 to 17.5 Mc/s. In 3 ranges, 9-valve superhet. 3 Kc/s. or 7.5 Kc/s. bandwidth, 100-250 v. 50 cps or 12 v. D.C. supply. Sensitivity 2-6μv. In exc. cond., £14/10/- (25/-). Type R.206 50 Kc/s. to 30 Mc/s. cont. in 9 ranges, 15-valve superhet, 0.7, 2.5 or 8Kc/s. bandwidth, 100-250 v. 50 cps or 12 v. D.C. supply. Sensitivity 2-4μv. A superative receiver in exc. cond., £30 (35/-). CRTs Type 5CP1, 20/- (8/-). 5FP7 15/- (5/-). **CANADIAN MARCONI TRANSMITTER RECEIVERS.** Type TR9, 12 v., I/P cover, 1.85 to 5 Mc/s. Complete set of units comprising Transmitter Power Unit and Receiver, new cond., £14/10/- (£2). **HRO POWER UNITS,** 12 v. D.C., I/P 25/-, new and boxed (3/6). **ADVANCE SIGNAL GENERATORS,** Type 49 230 v. A.C., I/P, 20 to 110 Mc/s., 1μV. to 10 mV. (with 100μA. carrier meter), in 5 ranges with int. mod., exc. cond., £10 (10/-). **SPRAGUE MOTOR SUPPRESSION CONDENSERS.** 0.004 mfd., 1,000 v. A.C., insulated case, 1/3 ea., 12/- doz., 70/- 100, £25 1,000 (1/-, 2/6 and cp., resp.). **24 v. DESYNN BLANK** dial indicators, 25/- (1/6). **DRAYTON TYPE RQ MOTORS,** 37 r.p.m., 230 v. A.C., 75/- (4/-). **New INDICATOR UNIT** AFW 99224A, 1-VC397, 2-VR91, 2-VR54, 1-CV1285, 1-VT61, mumetal shield, focus and brill. controls, 8 pots, ideal for 'scope conversion or CRT display unit, new with cct., 37/6 (5/-). **MAGNETIC CLUTCH,** 20 v., 0.575 A., torque rating 3ft. lb., 85/- (5/-). **SIZE 11 SYNCHROS IN STOCK.** Control Transformers, type 26 v.-11CT4A, brand new. **SIZE 11 SERVO MOTORS,** 115 v., 400 cps. and 24 v. 400 cps., control phase type, 11M47A, brand new, together with our normal range of **MAGSLIPS, SELSYNS, IPOTS,** etc., and all other components for electrical computation and controls. Please add carriage in brackets.

Post orders to **1, Hopton Parade, Streatham, High Road, London, S.W.16.**
Callers to **42 High Street, Orpington, Kent.** Tel.: Orpington 31066 and Streatham 6165.

TERMS: nett C.W.O. or monthly approved accounts.

TELEPRINTERS
PERFORATORS
REPERFORATORS
TAPE READERS

Pen Recorders, Terminals and V.F. Telegraph multi-channel units; Testing Equipment, Test Frames, Telephone Carriers and Repeaters; Signalling Rectifiers and Relays, Transformers, Transmit and Receive Filters; Repeating and Retardation Coils; Racks, Relay Bases, Uniselectors, Remote Control Transmitters, British, American and German Equipment.

BATEY & CO., GAIETY WORKS,
Akeman Street, Tring, Herts.
Tel.: TRING 2183 and 2310

PROVED

The finest method for cleaning records

Already over 200,000 enthusiastic users

THE "Dust Bug"

AUTOMATIC GRAMOPHONE RECORD CLEANER

PATENT No. 811,598

Price reduced to 17/6 (plus 5/10 purchase tax)

from your local dealer or

CECIL E. WATTS LTD.

Consultants and Engineers Sound Recording and Reproduction

Derby House, SUNBURY-on-THAMES, MIDDX

ELECTRIC MOTORS

Suitable for gramophone units, tape recorders, animated displays, fans, etc.

at 12/6 each

plus 2/- postage.

Dual Voltage range 110 v. and 230 v. A.C., open frame, 1,200 r.p.m. nominal rated at 12 VA continuous giving 5 oz. ins. torque.

SHEENDALE PRODUCTS LTD.

Derby Road, East Sheen, London, S.W.14. Trade enquiries invited.

Wireless World Classified Advertisements

Rate 9/- for 9 lines or less and 4/6 for every additional one or part thereof, average lines 6 words. Box Numbers 2 words plus 1/-. (Address replies: Box 0000 c/o "Wireless World" Dorset House, Stamford St., London, S.E.1.) Trade Discount details available on application. Press Day March 1961 issue, Thursday, February 23rd, 1961. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components and valves which may be offered for sale through our displayed or classified columns carry no manufacturers' guarantee. Many of these items will have been designed for special purposes making them unsuitable for civilian use, or many have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such items purchased.

NEW RECEIVERS & AMPLIFIERS

DUAL push-pull 10W AM/FM stereo quality chassis, inc. pre-amp tape and 2 High-flux speakers, leaflet.—Bell Sound Products, Marlborough Yard, Archway, London, N.19. [0186

THE world-famous "Globe King" kit; new and improved version, complete with all parts, chassis, coils and valve, together with "Easy-Build" charts and instructions; a highly efficient one valve short wave radio with band spread tuning; hundreds of testimonials. 79/6, postage paid.

H.P. RADIO SERVICES, Ltd., 42-51, County Rd., Liverpool. 4. Estab. 1935. [0203

RECEIVERS AND AMPLIFIERS—SURPLUS AND SECONDHAND

RECEIVERS A.R.88, excellent; from £35.—L. Soliman, Ltd., Beaufort St., Manchester, 3. Tel. Bla. 4571. [9345

HRO Rx's, etc., AR88, CR100, BRT400, R.G209, S640, etc., etc., in stock.—R. T. & I. Service, Ashville Old Hall, Ashville Rd., London, E.11 Ley. 4986. [0053

NEW TEST EQUIPMENT

HEATHKITS can now be seen in London and purchased on easy terms; free brochure.—Direct TV Replacements, Ltd., Dept. W.W. 31/12, 138, Lewisham Way, S.E.14. Tideway 6666. [9240

HETERODYNE frequency meter, BS-221, 1.25Kc/s-20Mc/s, TS-174, 20Mc/s-250Mc/s, TS-175A, 85Mc/s-1,000Mc/s Receiver-Indicators, APN-9A, Receivers, S-36A, 27Mc/s-145Mc/s, S-27CA, 125Mc/s-220Mc/s, R.D.O., 38Mc/s-4,000Mc/s. AR-88S, Eddystone 358X, 40Kc/s-32Mc/s; £16/10, etc.—F. V. Wright, 4a, Nepal Ave., Atherton, Manchester. [0019

TEST EQUIPMENT—SURPLUS AND SECONDHAND

B.C.221, as new, with charts, £50; camera gun, G.45, £5.—Box No. 3514. [9362

SOLARTRON oscilloscope type CD.523.S, D.C.-10Mc/s, as new, £175; Solartron regulated power supply 25-500v. 0-300M/a, type SRS151, £65.

MICOVAC elec. test meter, model 22B, £25; Mullard bridge type CM4146, £25.

COSSOR D.B. scope, model 1035, £50.

MARCONI signal generators, type 390G, 16-150Mc/s, £10; type TF517F, 150-300Mc/s, £10; type TF144G, 15Kc/s-25Mc/s, £40.

MARCONI universal impedance bride, type TF378D, £35; Marconi impedance comparison bridge, type TF202E, £40; Marconi valve voltmeter TF428B, £15.

BRAND new ex-Govt. sig. gen. CT212 No. 1, 85Kc/s-32Mc/s, AM-FM, 110/250V A.C. or 12V D.C., complete with all leads, £20.—110, Luton Road, Chatham, Kent. [9366

SIGNAL generators, oscilloscopes, output meters, wave voltmeters, frequency meters, multi-range meters, etc., etc., in stock.—R. T. & I. Service, Ashville Old Hall, Ashville Rd., London, E.11. Ley. 4986. [0056

TEST EQUIPMENT WANTED

OSCILLOSCOPE type 13A urgently required; highest price paid.—P.C.A. Radio, Beavor Lane, Hammersmith, W.6. [0261

NEW COMPONENTS

PLUGS and sockets.

MORE than 1,000,000 in stock, covering over 50 different ranges, British and American; stock list on application to—SABCO., Nutfield, Surrey. Tel. Rednill 5050. [9223

LINE output transformers and scan coils for most makes, exact replacements, from 25/-; used, and 45/- new; send s.a.e. for imm. quote; just a few examples from our extensive range in stock; add 2/6 for p. & p.; telephone orders sent same day c.o.d.

NEW L.O.P.T.s for Pye V4/VT, VT4/VT7, 52/6; scan coils for above, 62/6. Ferranti L.O.P.T. 14T3/4, 17T3/4, 43/-; Ferguson 992/6/8 L.O.P.T., 69/6; Murphy A40/250 L.O.P.T., 62/6; Bush TV24, 67/6; TV48, 67/6 L.O.P.T.s.

T.C.S. Ltd., 26, Brockley Cross, S.E.4. Tid. 5394, and 112, Camberwell Rd., S.E.5. [0354

There's no short cut to HI-FI

More than 25 years' experience and much painstaking development and research are behind the Partridge Transformers you can use today. Save yourself time, trouble and money by building this "know-how" into your equipment.



Illustrated is a "C" Core Transformer recently developed for electronic equipment. Transformers of similar construction are available for High Fidelity reproduction.

Make sure you have the newest Partridge Catalogue information. Post the coupon today.

Partridge

Partridge Transformers Ltd.
Roebuck Road, Chessington, Surrey
Details of newest Partridge Types please

NAME .....

ADDRESS .....

..... WW/1/61

COMPONENTS—SURPLUS AND SECONDHAND

SEND for catalogue No. 14—800 illustrated items; 2/6 post free.—Arthur Sallis Radio Control, Ltd., 93 (c) North Rd., Brighton [0195

TV spares, new, used, L.O.T.S. from 20/-, valves from 2/6, rebuilt tubes, all sizes, 12 months' guarantee; s.a.e. for quotation.—B.L. & Co., 121, Shepperton Rd., London, N.1. [9365

NEW GRAMOPHONE AND SOUND EQUIPMENT

RECORD stampers supplied within 21 days.—Radiophoto, 43, Clarendon St., Dublin.

GLASGOW.—Recorders bought, sold, exchanged, cameras, etc., exchanged for recorders or vice versa.—Victor Morris, 343, Argyle St., Glasgow, C.2. [0301

HIFI equipment tape recorders, record players; no arguments; we will make a deal with you.—The High-Fidelity Centre, 61, West St., Dorking [9364

CINE-VOX disc recording mechanisms for L.P. or standard operation from 30gns.-56gns.; also complete tape-disc or direct channels from 50gns.-112gns.

DEMONSTRATIONS can be arranged in London.—For full details write to K.T.S., Ltd., "Coplow," Park Rd., Braunton, N. Devon. Callers by appointment only. [0210

'EROICA' RECORDING STUDIOS (Est. 1949).—For the better class tape recorders for industry, research, music and private use: Ferrograph, Brenell, etc.; complete recording service; music for industry, tape/disc.—31, Peel St., Eccles, Manchester. Eccles 1694, Studio, Director Thurlow Smith, A.R.M.C.M. [0212

TAPE recorders; Ferrograph, Vortexion, Brenell, Telefunken, Reflectograph, & Fi ford. TAPE Decks; Wearite, Brenell, Truvox, Bradmatic. Amplifiers & Tuners: Quad, Leak, R.C.A., Dynatron, Dulci & Chapman. Microphones: Reslo, Lustraphone, Grampian & Telefunken. All tapes & accessories. Specialists in Audio & Sound Recording.
HIRE purchase fecilities available.
LAMBDA RECORD COMPANY, Ltd., 95, Liverpool Road, Liverpool, 25, Great Crosby 4012. [9014

LEE ELECTRONICS, The Tape Recorder and High-Fidelity Specialists, 400, Edgware Rd., Paddington, W.2, have purchased the entire Audiomaster range of tape and high fidelity equipment, and these units are offered as follows:—Monaural Power Amplifier complete with pre-amplifier, chassis mounting, provision for direct tape connection and all types of pick-ups, 25watts output—one of the finest amplifiers of its kind available; listed £59/10—offered at £29/10, new and boxed; carriage 8/6. AUDIOMASTER Monaural tape adaptor—self-powered separate record and playback amplifiers for 3 head monitoring; listed at £26—offered at £16, p. and p. 3/6.
AUDIOMASTER Stereo Recording Amplifiers—self-powered, suitable for use with Telefunken, Marriott Minifux, etc., stereo heads; listed at £33/15—offered at £19/10, p. and p. 3/6.
FULL descriptive leaflets available on all above items.
TRADE and export enquiries invited.
SEND for free lists of other bargain offers. [9360

GRAMOPHONE AND SOUND EQUIPMENT—SURPLUS AND SECONDHAND

FERROGRAPH 3A/NH, in London; £50; excellent cond.—Box 2810. [0132

RECORDING tape; save up to 30%; send for list; also 50 second-hand recorders in stock.—E. C. Kingsley & Co., 132, Tottenham Court Rd., London, W.1. Eus. 6500. [0253

WEARITE tape deck 230/250 a.c., speeds 3¾/7½, very little used; cost new, £35. Offers.—Price, Grimston House, Tollerton Lane, Notts. [9392

CONNOISSEUR varigrove disc cutting equipment, 78 and l.p.; heated stylus, suction swarf remover and Connoisseur pre-amplifier; all in new condition; price complete with qurntity of blanks, nearest £200, or h.p. terms.—P.W.B. Audio, 41, Call Lane, Leeds, 1. Tel. 28559. [9383

PRE-RECORDED TAPES

PRE-RECORDED tapes.—Unique 40-page catalogue listing all makes, mono, stereo. 7½ and 3¾ l.p.s.; send 2/6, refundable on first tape record purchased.—Dept. TR5, Teletape Ltd., 35, Edgware Rd., W.2. Pad. 1942. [0020

TAPE RECORDING, ETC.

ASK your dealer for American Ferrodynamics "Brand Five" recording tapes; the best tape value! [0258

RENDEZVOUS RECORDS offer comprehensive 78/45/33 tape to disc recording facilities.—Leaflet from 19, Blackfriars St., Manchester, 3. [9356

TAPE to disc recording, microgroove LP, from 27/6, 45 rpm EP 20/-, 78 rpm 11/-; 48-hour return service; finest quality; s.a.e. for comprehensive leaflet to—A. D. Marsh ("Decca" Sound Service), 53, West Bank Lane, West Bank, Lancaster. Tel. Hb. 2444. [9281

EXCLUSIVE OFFERS

★ Philips Electronic 5 digit Counter £22 10
★ Erskine D.B. Oscilloscopes £35 0
★ Murphy Pulse Amplitude Analyser .. £275 0
★ R.M.I. Waveform Monitors £185 0
★ Edwards Speedivac Pumps, 200 v. AC.. £18 10
★ Muirhead Ipots..... £12 10
★ 5ft. P.O. Racks £3 10
★ Dowty High Speed Registers £6 0
★ Ave Geiger Counters £12 10
★ American Teletype Tables £4 0
★ 50 watt Rack Mounting Power Amplifiers 200/250 v. A.C. £1 15
★ Precimon Mains Filters 10/-
★ 15 kVA Constant Current Transformers £35 0
★ Tryton Lattice Ladder Towers, 60ft. high £60 0
★ 26ft. 3½in. dia. Steel Tubular Masts .. £50 0
★ R.981 Triple Diversity Receivers £125 0
★ Ferranti 7 kVA Automatic Voltage Regulators £35 0
★ T-1131 Transmitters £35 0
★ Westinghouse 30 kV, 100 mA, Cabinet Rectifiers variable from 8 kV..... £75 0
★ AM-8/TRA-1 250 watt Amplifiers..... £8 0
★ DFG-30 Direction Finders £22 10
★ TCJ Transmitters, 400 watts £30 0
★ RCA 5-element Yagi Arrays, 420 Mc/s.. £3 0
★ 75ft. Plywood Masts, 9in. dia. £35 0
★ RCA 25-watt Projector Speakers £14 0
★ RCA Twin Channel Broadcasting Control £195 0
★ R.H.T. Power Supply, 3 kV, 0.5 amp. in cubicle £35 0
★ Standard Business Machines, Video type Tape Recorders, 3in. tape £250 0
★ 12in. Bowl Desk Inspirascope £3 0
★ Power Supply Units, 1,250 v. 200 m/a. £8 0
★ R.H.T. Power Supply, 7,500 v. 3.5 amps., in cubicle £950 0
★ R.H.T. Power Supply, 1,000 v. 5 amps., in cubicle £190 0
★ Sets 2 kW Constant Voltage Transformers....." £10 0
★ 300 Amp Ironclad T.P. Switch Fuses.. £10 0
★ Airport Runway Floodlights 1 KW.... £10 0

AERIAL EQUIPMENT. Whips, Beams and Microwave. Poles and Masts up to 150ft., 70 different types in stock.

RECEIVERS from 15 Kc/s to 650 Mc/s, 60 kinds available.

TRANSMITTERS, 50 types, Mobile and fixed, up to 2 kilowatts.

CABINETS and RACKS. American and British, open and closed, 30 patterns from 12in. to 9ft.

POWER SUPPLIES. Over 100 varieties giving up to 30,000 volts from standard and off standard inputs.

TRANSFORMERS. 200 patterns in stock of all sizes to 20 kVA for power and 5 kW for Radio, Audio and Modulation up to 2 kW also, lists available.

TELEGRAPH and TELEPHONE APPARATUS of all kinds include Printers and Perforators for Morse, 5, 6, 7 unit code also Transmitters and Converters and Carrier and Channeling equipment. Filters, Repeaters and Power supplies for all the above in British and American versions.

48-page List of over 1,000 items in stock available —keep one by you.

RELAYS and CHOKES. 12 tons of American post-war just arrived—a pleasure to use and look at—ask for special list—others in stock include Miniature, Polarised Post Office, aircraft, Control and Starting Relays, Chokes, open and potted, vary from one inch mumetal to 100-amp. power types—list available.

NUCLEAR GEAR—includes Scalers, Counters, Registers, Ratemeters, Dosimeters, Probes, Monitors, etc. Special list on request.

TEST EQUIPMENT. 200 different Items of British and American test gear and hundreds of types of Meters available.

We have a large quantity of " bits and pieces " we cannot list—please send us your requirements as we can probably help—all enquiries answered.

P. HARRIS

ORGANFORD - DORSET

WESTBOURNE 66461

TAPE RECORDING, ETC.

BRAND new recording tape. 7in reels 1,800ft Long Play 21/-, 5½in 1,200ft L/P 22/6, 5in 900ft L/P 17/6; other grades. 7in×1,200ft 16/6, 5½×850ft 13/3, 5in×600ft 12/-; Super quality. 7in 19/3, 5½in 15/3, 5in 13/9; P. & P. 1/- per reel.
EMPTY plastic reels. 7in 2/10, 5½in 2/8, 4in 2/- each; P. & P. paid.
GUARANTEED satisfaction.—A. Marshall & Son, Ltd., 18, Cricklewood B'way, London, N.W.2. Gladstone 0161/2. [9253

TAPE/DISC/TAPE transfer editing; copying; L. If quality and durability matter (especially with L.P.s from your precious tapes), consult Britain's oldest transfer service; new tape recorders supplied with a 2-year free service guarantee; latest American tape (Columbia, Ferrodynamics), 1,800ft., 35/-, now available.—Sound News Productions, 10, Clifford St., London, W.1. Reg. 2745. [0192

VALVES

VALVE cartons by return at keen prices; send 1/- for all samples and list.—J. & A. Boxmakers, 75a, Godwin St., Bradford 1. [0172

ANOTHER special valve offer from Walton's, of Wolverhampton. Any 12 (or 12 of one type) of the following valves for only 20/-, carriage paid.
Z77, TDD4, PEN46, 6B8, HD4, EF80, EF50, 6D6, VR16, EF91, 6P1, VR22, 2C34, EL32, 6AM6, 10P1, PEN220A, Y63, VU111, 6AL5, 6K7, EB34, KT33C, CV54, 6BW6, AC2 PENDD, VU120A, 6C6, EB91.
ALL these valves are boxed and are new or ex equipment, in which case they are electronically tested before despatch.—Walton's Wireless Stores, 15, Church St., Wolverhampton. [0105

RECLAIMED valves, tested and perfect, huge stocks, modern and obsolete, all one price, 5/- plus 6d postage each; delivery by return.—Lewis, 46, Woodford Ave., Gants Hill, Ilford, Essex. [9377

VALVES WANTED

NEW valves wanted any quantity, best cash price by return.—Stan Willetts, 43, Spon Lane, West Bromwich, Staffs. Tel. Wes. 2592. [9180

ALL types of valves, British or American, transmitting and receiving; keenest cash prices paid. What have you to offer?—Write or call Lowe Bros., 9a, Diana Place, Euston Rd. N.W. Te. Euston 1636-7. [9124

WANTED, EXCHANGE, ETC

WANTED, quad v.h.f., old Elizabethan, 700L and 3D recorder, tapes, Sale Tufnol sheets, 10/-.—99, Beaufort St., Derby. [9370

A PROMPT cash offer for your surplus brand new valves, speakers, components, test instruments, etc.—R.H.S., 155, Swan Arcade, Bradford, 1. [0190

WANTED, all types of communications receivers and test equipment.—Details to R. T. & I. Service, Ashville Old Hall, Ashville Rd., London, E.11. Ley. 4986. [0163

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. Gerrard 2504. [9171

WANTED, good quality communication RYS tape recorders, test equipment, domestic radios, record players, amplifiers, valves, components, etc., estab. 18 years.—Call, send or 'phone Ger 4638, Miller's Radio, 38a, Newport Court, Leicester Square, W.C.2. [9173

PROMPT cash for the purchase of surplus stocks of televisions, tape recorders, radios, amplifiers and domestic electrical appliances of every description, substantial funds available.—Spears, 14, Watling St., Chudehill, Manchester. Blackfriars 9432 (5 lines). Bankers: Midland Bank, Ltd. [0216

REPAIRS AND SERVICE

BOULTON'S OF BRADFORD.
LOUDSPEAKER, pressure unit, and microphone repairs, D.C.B., cone assemblies and field coils in cartons, service and satisfaction guaranteed.—D. C. Boulton, 134 Thornton Rd., Bradford, 1. Tel. 22838. [0171

MAINS transformers wound to any specification.
MOTOR rewinds and complete overhauls; first-class workmanship; fully guaranteed.
P.M. ELECTRIC Co., Ltd., Potters Bldgs., Warser Gate, Nottingham. Est. 1917. Tel. 54898. [0113

WE undertake the manufacture of transformers singly or in quantities to any specification; all work guaranteed for 12 months.
LADBROKE Transformer Co., Ltd., 820a, Harrow Rd., London, N.W.10. Tel. Ladbroke 0014. [0222

TRANSFORMERS.—Suppliers to B.B.C., I.T.A., and leading radio manufacturers, single or long runs, prompt delivery, home and export, rewinds to all makes.
FORREST TRANSFORMERS, Ltd., Shirley, Solihull, Warwickshire. Telephone Shirley 2493. [0128

TRANSFORMERS to any specification. Singles, rewinds, small or large batches; quick and efficient service, competitive prices, estimates by return of post from:
MESSRS. Newman & Son, 1, Grove Crescent, South Woodford, E.18. [0330

SPEAKER repairs, cones fitted, fields and clock coils wound, guaranteed satisfaction, prompt service.—L. S. Repair Services, Pluckley, Ashford, Kent. [0223

Ersin MULTICORE

SAVBIT SOLDER

Savbit for the small user

The popular Size 1 Carton is now supplied in 3 specifications: 53 ft. of 18 s.w.g. 30 ft. of 16 s.w.g. or 20 ft. of 14 s.w.g. 5/- each (subject).

Home Constructors Pack

Contains 19 ft. of 18 s.w.g. 60/40 alloy wound on a reel or, for soldering printed circuits, 40 ft. of 22 s.w.g. 60/40 alloy also wound on a reel. 2/6 each (subject).

Size 2 Carton

Contains 3 ft. of 40/60 Ersin Multicore 5-Core Solder—enough for about 200 average joints. The low price ensures a quick turnover. 6d.

Tape Solder Card

A real tin/lead solder containing cores of Ersin Flux. Needs no soldering iron or extra flux. Sufficient solder for 100 average joints. 1/-.

Bib Wire Stripper and Cutter

This efficient tool strips insulation, cuts wires cleanly and splits plastic twin flex. It is adjustable to most wire thicknesses. 3/6 each (subject).

Bib Recording Tape Splicer

Recording enthusiasts can effect considerable tape economies with this splicer. It makes the accurate jointing of tape so simple and quick that every scrap can be used. 18/6 each (subject).



Send stamped addressed envelope for free Copy of folder "How to Edit Tape Recordings".

See also MULTICORE advertisement on back cover

If you have any difficulty obtaining any of these items, they will be sent post free.

MULTICORE SOLDERS LIMITED
HEMEL HEMPSTEAD, HERTS



Give Your Records a Christmas Present

It is vitally important that the stylus pressure should be correct when playing modern records. The Garrard Stylus Pressure Gauge has been designed to provide an inexpensive and simple method of measuring this pressure. The gauge is elegantly styled and has an easily readable scale visible through a clear plastic window. It is accurate through the entire scale, 0-12 grammes. Supplied complete with 5 gramme checking weight.

GARRARD STYLUS PRESSURE GAUGE MODEL SPG3 19/6 INC. TAX

Garrard

THE GARRARD ENGINEERING & MANUFACTURING CO. LTD.
NEWCASTLE STREET, SWINDON, WILTS.
TEL. SWINDON 5381 (5 Lines). TELEX 44-271

MISCELLANEOUS

ELECTRICAL connectors.

MORE than 1,000,000 in stock, covering over 50 different ranges, British and American; stock list on application to—SASCO., Nutfield, Redhill, Surrey. Tel Redhill 5050. [9234

TRANSLATIONS, Russian, German, French, Spanish, Polish.—Box 2672. [9374

METALWORK, all types cabinets, chassis, racks, etc., to your own specification, capacity available for small milling and capstan work up to 1in bar.—PHILPOTT'S METAL WORKS, Ltd., Chapman St., Loughborough. [0208

ADVERTISING records (cardboard and P.V.C.) and sound-postcards to specifications.—Soundcraft (Electronics), 43, Clarendon St., Dublin. [9379

CABLE, full or random coils, 10% to 20% under list prices; conduit, 5% to 10% under list; request new catalogue.—British Distributing, 591, Green Lanes, London, N.8 [9381

NOTICES

THE ASSOCIATION OF PROFESSIONAL RECORDING STUDIOS, Ltd. To protect and encourage the interests of member studios engaged in electrical sound recording.—Write to the General Secretary, A.P.R.S., Flat 4, 34A, Arterberry Rd., London, S.W.20. [0173

BUSINESS & PROPERTY

RADIO and TV business for sale in main shopping area in small, busy, N.W. Yorkshire town; double-fronted shop on lease; £500. —Details Box 2655. [9373

RADIO and TV business for sale, established 25 years, in excellent trading position in busy market town in Westmorland; main agencies; premises comprise double-fronted shop, store rooms and workshop, together with living accommodation; price £3,000 (with option of taking over H.P. and rental balances).—Details Box 2652. [9372

AN opportunity for partnership or outright purchase. Two prosperous lock-up shops in E. Kent. T/O £20,000 p.a. expanding. Modest but profitable private rental scheme for Radio TV. Trade includes bicycles, prams & all electrical appliances and at one site enjoys monopoly. Secure Leases, £7,000 (s.a.v.). Urgent sale essential.—Crofts, Philp & Dann, 814, Brighton Rd., Purley. Tel. Uplands 8482. [9391

CAPACITY AVAILABLE

ELECTRONICS engineers to the industry. Production with 100% inspection.—RADIO-AIDS, Ltd., 29, Market Street, Watford (25988), Herts. [0214

RADIO components made to order.—Bel Sound Products, Marlborough Yard, N.19. [0185

COMPETITIVE quotations given for prototype and production runs with quality control.—Cave, Smith & Co., Ltd., Hereford. [9350

CAPACITY available for the development and/or production of mechanical and electronic assemblies.—M.S.S. Recording Co., Ltd., Foyle Trading Estate, Colnbrook, Slough, Bucks. Tel. Colnbrook 2431 (8 lines). [9369

SITUATIONS VACANT

LOUIS NEWMARK, Ltd.

LEADING company in the design of auto pilots for helicopters are expanding their facilities at their development laboratories at Croydon and have the following vacancies to be filled immediately.

ENGINEERS and Assistant Engineers with degree or H.N.C. and experience in the field of light electrical engineering electronics, electro mechanical devices or semi conductors, to work on the development, installation and flight testing of automatic pilots. Salary commensurate with experience. Pension scheme.—Apply in writing giving full particulars to: Personnel Officer, Louis Newmark, Ltd., Prefect Works, Purley Way, Croydon, Surrey. [0333

TEST and prototype engineers.

WANTED by a Company of Industrial Electronic Engineers for work on building and testing a variety of novel industrial control units, knowledge of electronics, keenness, enthusiasm, and initiative of most importance.—Please send full details of experience, etc., and salary required to Technical Director, Elcontrol Ltd., Wilbury Way, Hitchin, Herts [9352

WIRELESS OPERATOR, ANTARCTICA.

REQUIRED by the Government of the Falkland Islands for one tour of 24-30 months service in South Georgia. Salary according to age and experience in scale £420 rising to £540 a year. Free accommodation, messing, fuel and light provided. Gratuity at rate of £10 for each month of resident service. Free passages.

CANDIDATES, under 40 years of age, must be able to transmit and receive morse at 25 w.p.m. and should be familiar with H.F. and M.F. transmitters and receivers. Candidates should be capable of keeping a radio watch.

APPLY to Crown Agents, 4, Millbank, London, S.W.1 for application form and further particulars, stating age, name, brief details of qualifications and experience and quoting reference M3A/51108/WF. [9368

Armstrong

HIGH QUALITY RADIOGRAM CHASSIS

JUBILEE Mk. 2 MODEL. 29 GNS.



This is the new and improved version of the well-known Jubilee chassis. An AM/FM chassis with nine valves and two diodes and including a high fidelity amplifier providing 8 watts push-pull output with a frequency response of 20-30,000 c.p.s. ± 2dB. Full VHF band (87-108 m/cs) with automatic frequency control and medium and long wavebands. Inputs for tape recording and playback and for all types of pick-ups; a booster unit is available for low output pick-ups. Separate wide range bass and treble controls. Adjustable ferrite rod aerial on AM bands and magic eye tuning. Alternative matching for any loudspeakers.

AF208 MODEL. 22 GNS.



An AM/FM chassis providing 5 watts output and covering the full VHF and medium wavebands. Although this is the most economically priced chassis we have ever produced, the hand-built construction, superior finish and high quality components are the same as those used for our more expensive models. Inputs for all types of crystal pick-ups and for tape recording and playback. Separate wide range bass and treble controls and alternative matching for any loudspeakers.

See also our advertisement on page 64 for details of our high fidelity stereo chassis.

Post this coupon or write for descriptive literature or call at our Holloway showroom for full demonstration. Open 9-5 including Saturdays.

NAME .....

ADDRESS .....

..... WJC

ARMSTRONG WIRELESS & TELEVISION CO. LTD.
Warlters Road, London, N.7
Telephone: NORth 3213

COYNE'S NEW

PIN-POINT SERIES TAKES HEADACHES OUT OF ALL SERVICING PROBLEMS!

No. 1

Pin-Point

TV troubles in 10 minutes

Find the exact sound or picture trouble in ANY TV set from 700 possibilities! **Latest edition now has 332 pages of solid TV servicing information; 300 diagrams, check charts! 31/6.** Postage 1/-.

SPECIAL OFFER

Circle Book No. 1 on coupon, send only **16/3** after 7 days, and **16/3** in 30 days, making a total of **32/6** including postage.

No. 2

Pin-Point

Transistor troubles in 12 minutes

Trouble-shoot every type of circuit in ALL transistorized equipment! 525 pages; hundreds of illustrations; 120 check charts. **47/6,** postage 1/6. Circ.: Book No. 2 o.r coupon.

Simple Check Chart System Saves Time

These amazing practical handbooks with an

ENTIRELY NEW METHOD

show you how to find the trouble in ANY TV, or transistor circuit FAST! Index tells you where to look; famous Check-Charts help you to pin-point the exact trouble in minutes! These on the job books quickly pay for themselves in profitable new business and valuable time saved!

TRY ANY FOUR BOOKS ON *NO RISK* FREE TRIAL OFFER

No. 3. Application of Radio and T.V. Principles. 290 pages **20/-**
No. 4. Radio, Television and F.M. Receivers. 403 pages **20/-**
No. 5. Radio & T.V. Circuits. 334 pages **20/-**
No. 6. Latest Instruments for servicing Radio-T.V. 367 pages **20/-**
No. 7. Practical Television Servicing and Trouble Shooting Manual. 406 pages **34/-**
No. 8. Television Servicing Cyclopedia. 868 pages **47/6**
No. 9. Transistor Circuits. 410 pages **39/6**
No. 10. Coyne Technical Dictionary **16/-**
No. 11. Television and Radio Handbook **22/-**

SEND NO MONEY, USE TIME PAYMENT PLAN AT NO EXTRA COST IF YOU WISH

Just mail coupon for free trial. After 7 days send only low price or return books and pay nothing! If you keep more than one book, send £1 after 7 days and £1 each month until completed (maximum four books). **To buy one book send one half in 7 days, one half in 30 days.**

MAIL COUPON NOW FOR FAST RETURN SERVICE

TO:

SIM-TECH BOOK COMPANY,
Mail Order Division, DEPT. W.4, Gaters Mill, West-End, Southampton, Hants.

☐ Rush the books circled below for 7-day **FREE TRIAL** as per offer.

1 2 3 4 5 6 7 8 9 10 11

Name .....

Address .....

City ..... County .....

☐ Tick here if enclosing full price, we pay postage. Same 7 day money-back guarantee.
Postage 42 or less 1/-, 43 or more 1/6d.

OVERSEAS ORDERS, PLEASE PAY FULL AMOUNT, MONEY BACK GUARANTEE IF NOT SATISFIED.

SITUATIONS VACANT

PLYMOUTH and Devonport Technical College.—PRINCIPAL: E. Bailey, B.Sc., F.R.I.C., A.M.I.Chem.E.
REQUIRED as soon as possible, assistant lecturer Grade A, for Radio Officers' courses with opportunities for taking other radio and electrical courses within the Electrical Engineering Department. Candidates should hold P.M.G. Wireless Telegraphy certificate and Ministry of Transport Radar Maintenance certificate. Sea-going and/or teaching experience are added qualifications.
SALARY £520×£27/10 to £1,000 per annum, with additions for approved experience, qualifications and training.
FORMS and particulars (s.a.e.) from Clerk to the Governors, Education Offices, Cobourg St., Plymouth, to whom they should be returned as soon as possible. [9388

LONDON COUNTY COUNCIL, Norwood Technical College, Knight's Hill, S.E.27.—REQUIRED, assistants Grade B in the Department of Telecommunication and Electronics to fill vacancies due to promotion. The Department conducts full-time courses in telecommunication and electronics, radio operating and radar, part-time courses additional include radio and television servicing, television technology and other specialist subjects. Duties would include taking classes in one or more of these branches of study and possibly certain administrative responsibilities. Salary £738–£1,486, depending on qualifications and experience; appointments temporary in the first instance.—Application forms from the Principal, enclose self-addressed foolscap envelope. Please quote (FE3a/WW/2968/1). [9333

CENTRAL London firm requires competent organiser of postal and equipment sales. Age immaterial, refs. wanted. Part-time application considered.—Box 2462. [0133

SERVICE engineer, familiar with professional recording and audio equipment generally, also construction and wiring, studio post, North London.—Box No. 2551. [9365

SERVICE manager required; must be first class, and able to organise field and bench work, service office and transport; salary £1,000 to £1,250, according to ability.—Box 2757. [9380

RADIO mechanics.—Permanent and pensionable vacancies exist for young men experienced in the assembly, installation and testing of HF and VHF telecommunications equipment, preferably in connection with aviation ground services.
STAFF will be based at the Engineering Division of the Company, address below, but their main duties will take place overseas for varying periods installing telecommunications equipment. Whilst overseas a generous daily allowance is paid.
EX-SERVICES personnel of fully skilled categories are particularly welcome to apply.
APPLICATIONS to the Personnel Officer, International Aeradio, Ltd., Hayes Rd., Southall, Middlesex. [0263

AIRCRAFT Radio and Electrical Engineer required to take control of Servicing Workshops, Installations and Modifications in British and American Aircraft.—Apply: Personnel Manager, Western Airways, Ltd., The Airport, Weston-super-Mare. [9389

ELECTRONICS engineers: Men or women with at least O.N.C. or equivalent experience to do final tests and inspection on a wide range of high accuracy instruments. These are permanent staff positions with pension fund and club room facilities.—Electronic Instruments, Ltd., Richmond 6434. [0124

PRODUCTION Engineer required, experienced press shop, general machines, age 23-27. Salary commensurate with experience and qualifications. Please write in first instance with brief details to Works Manager, Technograph Electronic Products, Ltd., Upper St., Fleet, Hants. [9390

RADIO and Radar technicians required for operation and maintenance of the radars, ground control and airborne radio equipment (including telemetry) associated with the operation of pilotless aircraft.—Apply, stating experience, to: Short Brothers & Harland, Ltd., The Aerodrome, Llanbedr, Merioneth. [0260

TEST engineers.—Applications are invited from test engineers with previous industrial experience of testing radio communications receivers and transmitters; successful applicants will be offered positions on the company's permanent staff; starting salaries commensurate with qualifications and experience.—Apply in writing, giving full details, to Personnel Officer, Redifon, Ltd., Broomhill Rd., S.W.18. [0252

CIRCUIT Designers and Circuit Laboratory Engineers required for design and testing of automatic telephone exchange systems and other similar projects. Candidates should have had previous experience of this work and preferably have at least an O.N.C., or an intermediate grouped C. & G. certificate. Knowledge of Crossbar switching or totalisators would be an advantage. Good salary paid to selected applicants. Pension scheme after qualifying period.
WRITE giving full details of qualifications and experience to the Personnel Manager, Ericsson Telephones, Limited, Beeston, Nottingham, quoting Ref. DA/1. [0267

Sonic V Portable TAPE RECORDER

- Manufactured with finest British materials.
- All frequencies within the range of 40-12,000 c/s.
- Can be used as a straight amplifier having two speakers to which 5.3 watts are delivered (max. rating 9.5 watts).
- 3-speed recording on four-track tape.
- Erase head can be switched off to enable superimposing of recordings, etc.

Price of twin track, complete with crystal microphone, tape, spare spool, telephone adaptor, and lead with jack plugs for recording radio or records. **47 GNS.**

FOUR TRACK MODEL **50 GNS.**

GENERAL SONIC RADIOS
92, Caledonian Road, N.1—Ter. 0322

METERS

All makes of Single and Multi-range instruments repaired and recalibrated.

★ *Prompt Service*
★ *All work guaranteed*
★ *Priority for urgent orders.*

A NEW RANGE OF METERS 2½" TO 5" SCALED TO REQUIREMENTS. DELIVERY 10-14 DAYS.

E.I.R. INSTRUMENTS LIMITED
329 Kilburn Lane, London, W.9 *Tel: LAD 4168*

ADJUST. HOLE DOUBLE CUTTERS



with No. 3 Morse Taper Shank or Straight Shank ¼" Capacities: from 1" to 9" diameter. Send for illust.ated Price List.

LUDFRY LTD
8 Hanway Place, London, W.1. Tel. MUS 7472

NO* DOUBTS FOR DUODE USERS

Duode owners have no doubts. They know that they possess the most NATURAL, satisfying source of sound anyone can wish for. They know that their Duode is the finest investment possible, because it is never entirely out of date and as each group of improvements takes shape as a new model, their own unit can at a very reasonable cost be brought right up to the latest standards.

A customer who has just tried a new Duode under our home test plan writes—"I put it into my cabinet in place of my existing 12 inch unit and the difference was astonishing. Here is a Money Order for the balance due, and my thanks for the opportunity of discovering here at home what good reproduction should be."

If you also want good sound, long lasting pleasure and the satisfaction of knowing that your investment is gilt edged, write now for details.

DUODE SOUND REPRODUCERS

24, Dingwall Rd., Croydon, Surrey

"AS-NU"

REGUNNED T.V. TUBES

Supplied from stock, and despatched by British Railways same day. COMPLETE NEW GUNS fitted in every tube and fully guaranteed for TWELVE MONTHS.

	Mullard	Mazda
12in. ...	£4 10 0	£4 10 0
14in. ...	£4 15 0	£5 10 0
15in. ...		£6 0 0
16in. ...	£6 10 0	—
17in. ...	£5 10 0	£5 17 6
21in. ...	£8 10 0	£8 10 0

Plus 10/- carr. and ins.

Other types available. Please contact:

J. P. WRIGHT

Ia Shotton Street, Doncaster.

Sole Distribution Agent

Phone: DON 2636 or 66252.

SITUATIONS VACANT

OVERSEAS. Electronic technicians are required by an oil exploration company with headquarters in the U.K. Men should be single on joining. Work will include the maintaining and operating of field equipment often under conditions of desert, jungle and swamp. The equivalent of an H.N.C., with practical experience in electronics, is essential. Tours overseas are of up to two years, followed by home leave.—Write with full particulars, covering any time spent in the Forces, to Box 2228. [0331

VACANCIES for pensionable Radio/Radar Technicians ("Technical Officers") in the Department of Transport and Power, Dublin. Age limit: 40 years. Salary scale: £455 (at 21 years of age) to £790. Entry up to £630 in certain circumstances. Practical experience in the maintenance of V.H.F. radio and/or radar equipment is essential.—Application forms, etc., from Secretary, Civil Service Commission, 45, Upper O'Connell St., Dublin. Latest time for receiving completed application forms: 5 p.m. on 24th January, 1961. [9375

INTERNATIONAL AERADIO Ltd., has periodic vacancies overseas for Radio Technicians, City and Guilds Intermediate Telecoms. an advantage but not essential if applicant has considerable experience installation/maintenance H.F./V.H.F. low/medium power comms. Equipment; applications ex-service personnel of fully skilled categories welcomed; posts are permanent and pensionable; normally accommodation is provided with tax free emoluments equated to local conditions; additional marriage and child allowances; free air passages and insurance, kit allowance; generous U.K. leave. apply in writing.—Personnel Manager, 40, Park St., W.1 [0262

AIR Ministry require 2 engineers Grade III at Headquarters Signals Command, R.A.F. Medmenham, Marlow, Bucks, to work in team responsible for installation design of radio communication on radio navigational aid systems and design of ancillary equipment for such systems; quals. recognised engineering apprenticeship or equiv. training, and corporate membership of I.E.E., or equivalent or exempting quals., with sound knowledge of principles of radio engineering; salary scale £760 (at 25 years)—£1,220 p.a. (provincial-male).; forms from Ministry of Labour, Technical and Scientific Register (K), 26, King Street, London, S.W.1, quoting D776/0A; closing date 21 January, 1961. [9387

MINISTRY OF AVIATION require electrical engineers as assistant signals officers. Posts mainly in London, but some in provinces. Duties include planning, evaluation, installation and supervision of operation and maintenance of civil aviation telecommunications and navigational aids at airports and telecommunication centres. Quals.: 1st or 2nd Class Hons. degree in Physics or Engineering, A.M.I.E.E. or A.F.R.Ae.S. Candidates with Parts I, II and III of A.M.I.E.E., or Parts I and II of A.F.R.Ae.S. or equivalent or of high professional attainment without these quals. considered. Salary Scale: £690 (at age 23) to £1,300. Slightly lower for women and for posts outside London. Promotion prospects.—Further details and forms from Ministry of Labour, Technical and Scientific Register (K), 26, King St., London, S.W.1, quoting D.161/0A. [0315

SITUATIONS WANTED

FOREMAN aerial rigger, driving licence, references, etc.—Box No. 2570. [9367

ENGINEER, experienced radio, TV/Audio/V.H.F. radio telephone/cinema sound seeks situation, pref. field; own transport.—Box 2785. [9385

YOUNG man, 32, public school education, several years experience of TV servicing, previous travelling experience, requires position as sales rep. to radio or component firm.—Marshall, 223, Dobcroft Rd., Sheffield. [9371

TECHNICAL TRAINING

RADIO and television servicing.

HOME-STUDY courses with special schemes of practical work are available from the Pembridge College
(1) Introductory course for beginners.
(2) More advanced course covering new R.T.E.B. Intermediate Certificate.
(3) Advanced course covering R.T.E.B. Final Certificate (in preparation).
DETAILS from: The Pembridge College of Electronics, 34A, Hereford Rd., London, W.2. [0256

TRAINING in radio and television servicing.

NEXT full-time one-year course commences on January 3rd. Recognised by R.T.E.B. for new radio and television servicing certificate examinations.—Details from: The Pembridge College of Electronics, 34A, Hereford Rd., London, W.2. [0257

LEARN Radio and Electronics the New Practical Way! Very latest system of experimenting with and building radio apparatus—"as you learn"—Free brochure from Dept. W.W.10, Radiostructor, 40, Russell St., Reading, Berks. [0041

CITY & GUILDS (electrical, etc.) on "No Pass—No Fee" terms, over 95% successes.—For details of modern courses in all branches of electrical engineering, applied electronics, automation, etc., send for our 148-page Handbook—Free and post free—B.I.E.T. (Dept. 388A), 29, Wright's Lane, London, W.8. [0017

CABINETS, ENCLOSURES AND EQUIPMENT BY STAMFORD

To Goodmans Specification

Speakers supplied. See "EQUIPMENT" listed below.

S.81. Corner Enclosure in three sizes.

(a) For Axiette. Price £10/18/6 or 43/8 deposit and 9 pymts 20/11 mthly.
(b) For Axiom 110 and 112. Price £13/13/- or 54/6 deposit and 9 payments 26/1 monthly.
(c) For Axiom 200 or the 3-Way system including ARU No. 175. Price £17/15/8 or 71/- deposit and 9 pymts 34/- monthly.

HI-FIDELITY EQUIPMENT

Only 5% interest charged on Credit and H.P. Terms for equipment.

	Cash Price £ s. d.	H.P. Dep.	18 m/s
SPEAKERS			
Goodmans 8" Axiette	5 12 1	23/6	6/4
" 8" Trixiette	13 10 0	54/-	13/10
" 10" Axiom 110	5 0 0	20/-	4/10
" 10" Axiom 112	8 10 0	34/-	8/2
" 12" Axiom 200	11 5 0	45/8	10/10
" Trebax 5K/30XL	7 0 0	28/-	6/9
" Midax 600	3 10 0	30/-	9/1
Wharfedale 8" Column 8/145	6 19 11	28/-	6/8
" 8" Super 8/PB/AL	6 19 11	28/-	6/8
" 10" Golden/PSB	8 6 7	33/4	8/-
Whiskeys WB 10" HF 1012	4 15 0	19/-	4/7
" WE 10" HF 1016	7 12 4	30/6	7/6
Elac 4 speaker HPF/2	10 16 8	43/8	10/5
LOUDSPEAKERS—COMPLETE SYSTEMS			
Goodmans AL/100	23 10 0	94/-	22/7
" AL/120	29 10 0	118/-	28/4
" Sherwood I	32 11 0	130/-	31/2
Wharfedale W2	29 10 0	118/-	28/4
" W3	39 10 0	158/-	37/11
" SPB/3	39 10 0	158/-	37/11
GRAM UNITS ETC.			
Lenco GL 58/580	23 15 8	95/4	22/10
Garrard 301 Strobe	25 18 4	98/8	23/-
Garrard 4 HF (Mono)	18 9 9	74/-	17/9
Garrard TA Mk. II (Mono)	8 19 9	34/-	8/2
Garrard 4 HF (Stereo)	19 4 8	79/11	18/6
Garrard TA Mk. II (Stereo)	9 11 7	37/-	8/11
Garrard 210	13 13 5	53/8	12/8
Collaro RP 594 (Stereo)	11 18 6	47/8	11/6
Decca FF88 Pick-up	21 0 0	84/-	20/2
AMPLIFIERS			
Leak TL 12 Plus/Vari III	34 12 0	138/8	33/5
Rogers Junior	17 0 0	68/-	16/4
Leak Stereo 20/Vari III	55 9 0	221/10	53/3
Quad 22 and 2 Amps.	70 0 0	280/-	67/2
Jason 22 10	40 19 0	163/10	39/4
TUNERS			
Leak Trough Line Mk. II	25 15 0	103/-	24/6
Acoustical Quad F.M.	28 17 6	115/6	27/6
Rogers Junior Switched	13 1 10	60/7	14/7
CHASSIS			
Armstrong Jubilee Mk. II	30 9 0	121/10	29/3
" Stereo 55	26 12 0	104/8	25/6
" Stereo 12 Mk. II	44 1 0	178/6	42/4
TAPE			
Brenell 3-Star Recorder	60 18 0	243/7	58/5
" Mk. V Deck	29 8 0	117/7/	28/2
" Mk. V Amplifier	24 0 0	96/-	23/-

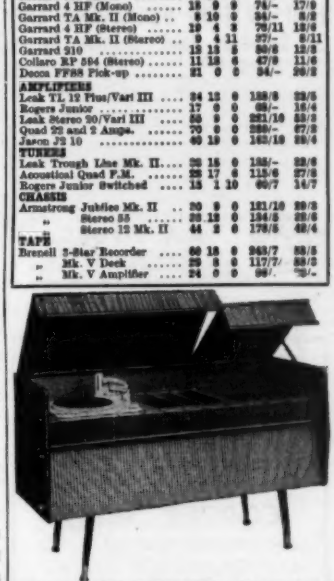

GP76 FOR STEREO OR MONAURAL. 4ft. wide Record storage. Deck 17 x 16in. Control Panel 15 x 16in. Tygan Grille, also supplied with full length motor board, omitting record storage. Price £22/10/- or 90/- deposit and 9 payments 41/6.

Write for lists for Equipment, Cabinets and Enclosures. We specialise in supplying any equipment currently available. Demonstrations at our Weymouth Terrace Showroom. Our Products are supplied in oak walnut and mahogany veneers finished in shade required. Delivery 12/6 England and Wales. 25/- Scotland.

Visit our Hi-Fidelity Showrooms at: 94/96/98 Weymouth Terrace, off Hackney Road, LONDON, E.2. Telephone: SHO 6063
Showroom hours: Monday-Saturday, 9.30 to 5.30.
Late night Wednesday, 7 p.m.
Directions: No. 6 bus from Liverpool Street Station to the Odeon, Hackney Road, walk back two turnings.

A. L. STAMFORD LTD. (DEPT. G4)

SOLDERING EQUIPMENT BY LITESOLD

(REGD TRADE MARK)

PRECISION INSTRUMENTS

Comprehensive range. Robust and Reliable. Light weight - Rapid heating - Bit sizes 3/32 in. to 3/8 in. - "PERMABIT" or Copper bits - All voltage ranges 6/7 v. to 230/250 v. - Prices from 19/6.

ALSO

- PLASTIC CABLE STRIPPERS.
- MINIATURE SOLDER POTS.
- HEAT GUARDS.
- LONG LIFE BITS.

ADAMIN

The new range of micro-soldering instruments. Weights from ¼-oz. Bit dia. 1/32in. Have you had details?

Brochure 33 on request from the sole proprietors and manufacturers with 28 years' experience in this field.

LIGHT SOLDERING DEVELOPMENTS LTD.
28 Sydenham Road, Croydon, Surrey
Phone: CROydon 8589 Grams: Litesold Croydon

To our many friends in Communications, Electronics, Educational and Medical Establishments here and abroad, we wish Hi-Fi and Prosperity throughout 1961.

A.A. TOOLS
197A WHITEACRE ROAD, ASHTON-UNDER-LYNE, LANCS

RESISTANCE WIRES

EUREKA-CONSTANTAN

Most Gauges Available

NICKEL-CHROME MANGANIN

COPPER WIRE

ENAMELLED. TINNED, LITZ, COTTON AND SILK COVERED

SMALL ORDERS PROMPTLY DESPATCHED

B.A. SCREWS, NUTS, WASHERS, soldering tags, eyelets and rivets, EBONITE and BAKELITE PANELS.

TUFNOL ROD, PAXOLIN TYPE COIL FORMERS AND TUBES, ALL DIAMETERS

SEND STAMP FOR LIST TRADE SUPPLIED

POST RADIO SUPPLIES
33 Bourne Gardens, London, E.4
Phone: CLissold 4688

TECHNICAL TRAINING

STUDY radio, television and electronics with the world's largest home study organisation: Brit.I.R.E.; City & Guilds; R.T.E.B., etc.; also practical courses with equipment; no books to buy.—Write for free prospectus, stating subject, to I.C.I. Intertext House, Parkgate Rd., (Dept. 419), London, S.W.11. [0539

TUITION

ROYAL TECHNICAL COLLEGE, SALFORD.

DEPARTMENT of Electrical Engineering.
HEAD of Department: J. H. Calderwood, M.Eng., Ph.D., M.I.E.E., F.Inst.P.
A COURSE of six lectures on ELECTRICAL Insulation will be given on Tuesdays at 7 p.m. commencing on 7th February, 1961. The fee for the course is £1 11s 6d. Further details may be obtained from the Head of the Electrical Engineering Department. [9364

FULL-TIME courses for P.M.G. Certificates, C.G.L.I., Telecommunications and Radar Maintenance Certificates.—Information from College of Technology, Hull. [0111

TV and Radio—A.M.Brit.I.R.E., City and Guilds, R.T.E.B. Cert., etc., on "No Pass —No Fee" terms, over 95% successes.—For details of exams. and home training courses (including practical apparatus) in all branches of radio, TV and electronics, write for 148-page Handbook—free—B.I.E.T. (Dept. 397A), 29, Wright's Lane, London, W.8. [0016

FIND TV set troubles in minutes from that great book, The Principles of TV Receiver Servicing, 10/6, all book houses and radio wholesalers.—If not in stock from Secretary, I.P.R.E., 20, Fairfield Rd., London, N.8. [0089

FREE from the I.P.R.E.: Syllabus of famous radio and TV courses; membership conditions booklet, 1/-; sample copy The Prac. Radio Engineer, 2/- post free.—Secretary, 20, Fairfield Rd., London N.8. [0088

WIRELESS.—See the World as a radio officer in the Merchant Navy; short training period, low fees, scholarships, etc., available boarding and day students' stamp for prospectus.—Wireless College, Colwyn Bay. [0018

RADIO and TV servicing, all aspects from basic principles, guaranteed coaching for City & Guilds, R.T.E.B. Cert., Brit.I.R.E., etc. Study at home under highly qualified tutors. No books to buy.—Write for free prospectus stating subject, to I.C.S., Intertext House, Parkgate Rd. (Dept. 442A), London, S.W.11. [0033

"HOW and Why" of Radio and Electronics made easy by a new, no-maths, Practical Way. Postal instructions based on hosts of experiments and equipment buildings carried out at home. New Courses bring enjoyment as well as knowledge of this fascinating subject.—Free brochure from Dept. W.W.12 Radiostructor, 40 Russell Street, Reading, Berks. [0240

A.M.I.Mech.E., A.M.Brit.I.R.E., City & Guilds, G.C.E., etc., bring high pay and security: "No Pass—No Fee" terms: over 95% successes.—For details of exams. and courses in all branches of engineering, building, electronics, etc., write for 148-page Handbook—free.—B.I.E.T. (Dept. 387B), 29, Wright's Lane, London, W.8. [0116

BOOKS, INSTRUCTIONS, ETC.

BACK issues of "Wireless World," almost complete, from 1947 to 1958; offers? Buyer collects from 54, Hillfield Rd., N.W.6. [9382

TELECOMMUNICATION Technician Textbooks; Telecomm Principals A and B, 9/6 p.f.; Telecomm Maths. A and B, 9/6 p.f.—Riddiford, 384 Tilehurst Rd., Reading, Berks. [9215

HOW to use ex-Gov. lenses and prisms. Nos. 1 & 2, 2/6 ea.; lists free for s.a.e.—H. W. English, 469, Rayleigh Rd. Hutton, Brentwood, Essex. [9542

SELL by post—receive cash by post! Learn mail order trading, unlimited trade expansion; Mailmethods Manual shows how; details, s.a.e.—Mailmeth.ds (M.15) Co., 170, Old Christchurch Rd., Bournemouth. [9330

"INTRODUCTION to Valves." By R. W. Hallows, M.A. Cantab., M.I.E.E., and H. K. Milward, B.Sc.Lond., A.M.I.E.E. Describes the principles, construction, characteristics and uses of most types of radio valves. The approach is simple and, as far as possible, non-mathematical, so the book provides the student with a thorough understanding of valves and how they work. 8/6 net from all booksellers. By post 9/4 from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

"ABACS or Nomograms." By A. Giet. Translated from the French by H. D. Phippen and J. W. Head. Most engineers have made use of nomograms at some time in their careers, and are fully alive to the fact that they are a very convenient tool when the same formula has to be solved repeatedly for several sets of variables. It is fair to say, however, that only a small proportion of even those who habitually employ nomograms know how to construct them for their own use. Most of the comparatively small literature on the subject is written for mathematicians and is extremely difficult for the practical engineer to comprehend. This book is essentially practical, and not only demonstrates the many and varied applications of the abac or nomogram, but shows how even those without highly specialized mathematical knowledge may construct their own charts. 35/- net from all booksellers. By post 36/- from Iliffe Books Ltd., Dorset House, Stamford St., London, S.E.1.

SERVOMECHANISMS

An introduction to the practice and theory of closed-loop position-control systems, with an account of methods of data transmission and computation.

By P. L. Taylor.

42/- Postage 1/6.

PRACTICAL TV TROUBLE-SHOOTING. 18/6. Postage 9d.

THE ANTENNA by L. Thourel. 70/-. Postage 1/6.

SOLUTION OF PROBLEMS IN TELECOMMUNICATIONS by C. S. Henson. 25/-. Postage 9d.

USING TRANSISTORS by D. J. W. Sjobbema. 15/-. Postage 6d.

BASIC MATHEMATICS FOR ELECTRONICS by N. M. Cooke. 50/-. Postage 1/6.

ELECTRONIC COMPUTERS. Principles and Applications, by T. E. Ivall. 25/-. Postage 1/-.

REFERENCE DATA FOR RADIO ENGINEERS. 4th ed. 54/-. Postage 2/-.

RADIO VALVE DATA. 6th ed. Compiled by "W.W." 5/-. Postage 9d.

THE MODERN BOOK CO.

BRITAIN'S LARGEST STOCKISTS of British and American Technical Books

19-21 PRAED STREET LONDON, W.2

Phone: PADdington 4185
Open 6 days 9-6 p.m.

NYLON · P.T.F.E.

No quantity too small. List on application.

BRASS · COPPER · BRONZE
ALUMINIUM · LIGHT ALLOYS
H. ROLLET & Co. Ltd.
6 Chesham Place, S.W.1. *BELgravia 4300*
ALSO AT LIVERPOOL, BIRMINGHAM, MANCHESTER, LEEDS.

TAPE RECORDER SOUND HEADS

Monaural.	R/P & Erase.
2 Track Stereo.	R/P & Erase.
4 „ „	R/P & Erase.

HOME & EXPORT

Full specifications, technical data, with samples available to the Trade on request :—

BRADMATIC PRODUCTIONS LTD
124, ALBERT ROAD
BIRMINGHAM, 21
ENGLAND

"RECO" TRANSISTOR KITS

"RECO" TRANSONA-3 (3 transistors)

M/L waves. Ferrite rod aerial. Tuning condenser. Home, Light and Radio Luxembourg too. Complete kit with easy-build plans and "Sonotone" miniature earpiece. 55/-. Post etc. 2/6.

NEW! **"RECO" PUSH-PULL SIX KIT (6 transistors and 2 diodes).** M/L waves. Sensitivity of a super-het (2 HF stages) Tonal quality of a TKr. Performance as Transigen-3 but full loudspeaker strength. 9,000 lines 3in. loudspeaker with full-tone output. Without doubt the finest value in transistor kits today. Competitively priced at 6o/19/6, post etc. 2/6. (Case 6½ x 4½ x 1½in. approx.)

"RECO" TRANSIGEN-3 (3 transistors). M/L waves and T.B. High-gain ferrite rod aerial XA104 (Ediswan) RF stage. On test (50 miles London) tuned in Home, Light, Third, AFN, Radio Luxembourg and many others at good headphone strength. A really fine transistor kit complete with easy-build diagrams, and "Sonotone" min earpiece 49/6. Post etc. 2/6. (Case 6½ x 4½ x 1½in.)

"RECO" PUSH-PULL FOUR (4 transistors) M/L waves with 2 S/W coils free upon request. 3in. HIGH-GRADE speaker affording fine tonal quality Ferrite rod aerial. Bias sensitivity volume control. Complete kit with easy-build diagrams £4/19/6. Post etc. 2/6. (Uses 4½v. flash-lamp battery.)



"RECO" PUSH-PULL FIVE (5 transistors). M/L waves and T.B. Indoors or outdoors this brilliant radio brings Home and Continental stations to your finger tips. 3in. Golden-Tone Speaker. Ferrite Rod Aerial. EDISWAN XC101's (350 mw). Push-pull output stage. Gleaming pale blue styrene case with speaker grille in red. Complete kit with easy-build diagrams £5/19/6. Post etc. 2/6. Dorset customer writes:—"Makes fine car radio."

"RECO" SUPER TRANSIGEN-4 (4 transistors) as Transigen-3 but with 3in. speaker. Complete kit £4/19/6. Post etc. 2/6. (XA104, XB113, XC101, XC101.)

"RECO" AMAZON-3 3 transistors). Medium waves with 2 S/W coils upon request. Tonal quality above average. Sensitive reflex circuit. Complete kit with super B.A. reproducer and attractive plastic case 55/-, post etc. 2/6.

All transistors used in our kits are EDISWAN FIRST GRADE.

Overseas customers please add 3/6 extra for post.

Circuits only and parts price list 2/6 for 6.

AFTER SALES SERVICE

RADIO EXCHANGE COMPANY

27 HARPUR STREET, BEDFORD.
(Opposite Co-op). Phone 2367
Closed Sat. 1 p.m.

BOOKS, INSTRUCTIONS, ETC.

"RADIO Designer's Handbook." Editor, F. Langford-Smith, B.Sc., B.E., Senior Member I.R.E. (U.S.A.), A.M.I.E. (Aust.) a comprehensive reference book, the work of 10 authors and 23 collaborating engineers, containing a vast amount of data in a readily accessible form; the book is intended especially for those interested in the design and application of radio receivers or audio amplifiers. Television, radio transmission and industrial electronics have been excluded in order to limit the work to a reasonable size. 55/- net from all booksellers. By post 57/3 from Iliffe Books Ltd., Dorset House, Stamford St., S.E.1.

"SECOND Thoughts on Radio Theory." By Cathode Ray of "Wireless World." Forty-four articles reprinted from popular "Wireless World" series, in which the author examines various aspects of elementary radio science, explains them clearly, and shows that there may be more behind them than is apparent from the usual text-book. This volume deals with basic ideas; circuit elements and techniques; circuit calculations; and some matters in lighter mood. An entertaining and helpful text-book for the student, refresher course for the engineer, and reference book for all combined; 25/- net from all booksellers. By post 26 4 from Iliffe Books Ltd., Dorset House, Stamford St., S.E.1.

INSTRUMENT REPAIRS

DON'T WAIT. TAKE ADVANTAGE OF OUR QUICK SERVICE, COMPETITIVE PRICES AND GUARANTEED REPAIRS.

We specialise in the repair and conversion of the following:-

MULTI-RANGE METERS.
AMP-VOLT-WATTMETERS.
ELECTRONIC AND ALL ALLIED MEASURING EQUIPMENT.
SPC. LABORATORY EQUIPMENT.

LEDON INSTRUMENTS LTD.
96, Deptford High St., London, S.E.8.
TIDEWAY 2689

COVENTRY RADIO LTD.

183/191 Dunstable Road, LUTON
Audio & Component Specialists Est. 1925

If you are unable to visit us at Luton, send for a copy of our

HI-FI CATALOGUE

of 300 items 70 pages.
Price 1/- plus 6d. postage.

JASON KITS

Everest Portable Radio
£13/19/6—6 Transistor.
£15/18/6—7 Transistor.

Tuner FMT1	£5	5	0
Tuner FMT3	£9	19	9
Tuner Mercury 2	£13	14	0
Stereo Amplifier JSA2	£13	19	0
Tuner JTV2K	£12	19	0
Tuner Argonaut AM/FM Tuner	£19	10	0
Tuner Argonaut Radio Receiver	£11	11	0

LUTON'S HI-FI CENTRE
Telephone Luton 7388/9

LEWIS have the CABINET for YOU

EXTENSIVE RANGE OF CABINETS FROM £4-7-6

THE CONTEMPORARY
Price £11.11.0

This beautifully designed Contemporary Cabinet can be supplied in Oak, Walnut or Mahogany veneer and has a waxed semi-matt finish. This cabinet can be fitted with any of the latest Hi-Fi units.

THE GROSVENOR
Price £19.19.0

This elegant cabinet is available in veneered figured walnut and polished to a high gloss in a medium shade. Gold embellishments are an attractive feature of the design. 9in. block legs are normally fitted. A three sliding door system reveals ample storage room and space for equipment.

TWO NEW LEWIS CATALOGUES:—

FREE! **The Cabinet Catalogue**
The Equipment Comparator Catalogue

(Designed to assist your choice of cabinet and equipment).
Please send me details of your two new catalogues

Name .....
Address .....
.....
BLOCK CAPITALS PLEASE WW21.

LEWIS radio

100 CHASE SIDE, SOUTHGATE, N.14
Telephone: Palmers Green 3733

HARRINGAY SUPPLIES
345 HORNSEY ROAD, N.19

ARC 4/07

TELEPHONES "y" TYPE
Complete in fitted case, portable, range up to 5 miles suitable for factories, building sites, offices, etc. 2 complete sets—£8/10/-. Carr. 5/-.

RE-ENTRANT LOUD HAILERS
Dia. 15in. Heavy Duty All Metal, new and unused £3/10/-. Carr. 10/-.

SMALL MODEL MAKERS MOTORS 24v. AC/DC.
Reduction geared, new. Size 1¼in. × 1in. × 2¾in. long. 12/6 each.



p/p 1/6. Other types of small 12 or 24 v. motors in stock.



TRANSFORMERS
210/250 v in, 275-0-275 v. 90 mA 6.3 CT. 2 A. out. 17/6. 210/250 in 300-0-300 v. 125mA 6.3 CT.4A 6.3 CT. 2.5 A. 5 v. 3 A. out, 22/6. 220/240 v. in, 4 v. 6.34 A. Postage 2/- in the £1 on all.

Pots 10K, 10k Wire, 2.5K 2 m. 25K Lin and Log. .05/.25M 2/- each, post 6d. Tygan Free 2/- sq ft.
TRANSFORMERS—Step Down 200/250 v. in, 30 v. 100 watt out 17/6, post 2/-. 200/250 v. in, 110 v. 100 watt out 17/6, post 2/-. 200/250 v. in, 110 v. 3.04 amps. out 24/10/-, post 5/-.
AC/TO DC RECTIFIER UNITS, 200/250 v. in, 100/120 v DC out at 2.5 amp. £9/0/0.
"DISTRIBUTION BOARDS" 12" x 6" fitted with 200-250v. AC volt meter, two 15 amp fuses, two 3 pin output sockets, 1 mains input socket 18/6, post 3/6.

radio masts and aerial equipment

with TECHNICAL SERVICES *for*

Standard Tubular Steel Masts
V.H.F. Installations
Rhombics
Dipoles
Folded Dipoles
Vertical Radiators
'T' Aerials, Single & Multiwire
Transmission Line Equipment
Terminating Resistance Units
Lead-in Insulator Panels
Radial Earth Systems
System Planning and Installation

As supplied to:

Government Depts.
Overseas Administrations.
Major Oil Companies.
Leading Manufacturers of Communications Equipment.

South Midlands Construction Limited
ROMSEY RD., CADNAM, SOUTHAMPTON

FOR SOLDERING THAT'S CERTAIN...
HENLEY SOLON
Trade Mark
Best electric soldering irons in the business — first choice with industry for over 25 years. Full range available. 25 watt model illustrated. For leaflet write:
AEI CABLE DIVISION
Associated Electrical Industries Limited
Distribution Equipment Sales Department, 145 Charing Cross Road, London, W.C.2 Tel: GERrard 8660.

REBUILT TV TUBES
FULLY GUARANTEED 12 MONTHS
Complete New Gun fitted in every Tube
12" 14" .. .. £5.0.0 | 17" £6.0.0
15" .. .. £5.10.0 | 21" £8.0.0
Immediate Delivery
Carriage and Insurance 10/- extra
NU-GUN TELETUBES LIMITED
3 The Mews, Duckett Rd., Harringay London, N.4.
Telephone: MOUntview 2903

RACKS & PANELS
All types, open and enclosed, to G.P.O. or customer's specification
SOUND SALES LTD.
Works & Laboratories.
West Street, Farnham Surrey
Farnham 6461

WALTRAK pocket audio oscillator, transistorised, 1,000 c.p.s., supplied complete with battery, probe, etc. Excellent technical reviews, ideal for circuit checking, etc. £6/10/- subject.
WAL GAIN transistorised pre-amplifiers, many applications, supplied complete with battery, phono plugs, screened lead, etc. Mono £5, Stereo £7/10/- subject.
Full technical literature.
WELLINGTON ACOUSTIC LABORATORIES LTD.
Farnham, Surrey Farnham 6461

Instrumentation at its best . . .

SIFAM ELECTRICAL INSTRUMENT CO. LTD.
WOODLAND ROAD, TORQUAY Tel. 63822/3/4

REBUILT T/V TUBES
12"-14" £4 15 0 15"-17" £5 5 0
21" £7 15 0
ALL TUBES GUARANTEED FOR 12 MTHS. 15/- ALLOWED ON YOUR OLD BULB. CARRIAGE AND INSURANCE EXTRA.
VACUUM ELECTRONIC LTD.
35 SACKVILLE ST., LONDON, W.1.
Phone REG. 6404

A.D
LOUDSPEAKER ENCLOSURES AND AMPLIFIER CONSOLE CABINETS
A. DAVIES & CO. (Cabinet Makers)
3 PARKHILL PLACE (off Parkhill Road LONDON, N.W.3 GULLIVER 5775
Few minutes walk Belsize Park Underground

LYONS RADIO LTD.

POCKET MULTIMETERS. Specially imported multi-range compact instruments of a high order of accuracy housed in dust-proof bakelite case with 3in. rectangular clearly calibrated dial, single selector switch on front panel. Ranges: Volts A.C and D.C. 0-10-50-250-500-1,000 v. (1,000 ohms per volt). D.C. current: 0-1-100-500 mA. Resistance: 0-2,000 and 100 to 200 K/ohms. Includes full instructions, test leads and battery. PRICE ONLY £4.
T.C.C. MANSBRIDGE CONDENSERS. 8 mfd. 500 v. wkg. at 60° C., inverted mtg., type 8J I.M. PRICE 5/6. 4 mfd. 1,500 v. wkg. at 60° C., type 121B inverted mtg. PRICE 4/6. 4 mfd. wkg. at 60°C., type 92. PRICE 4/-. All above guaranteed as new and unused. For less than 6 add 1/6 post, over post free.
VALVES. Special this month—Mullard EF50 (Red), 2/9 ea. EF55, 4/6 ea. 5U4G, 4/6 ea. Mazda 6F12, 3/6 ea. All as new and guaranteed. Post free.
BATTERY CHARGER or MODEL RAILWAY COMPONENTS.
RECTIFIERS. Full wave bridge types for outputs up to 12 v. D.C. 1 amp., 5/3. 2 amp. 8/9. 4 amp. 12/6.
TRANSFORMERS. Pri. 200/250 v. Sec. tapped 3.5, 9 and 17 v. for producing a D.C. output, when used with above rectifiers, of 2 v., 6 v. and 12 v. respectively. 1 amp. size 11/3. 2 amp. 15/3. 4 amp. 19/6. Postage up to value 16/6 add 1/9, over add 2/6. Wiring diagram supplied if requested.
INVERTERS. Known as Motor Generator type 7, Air Min. Ref. 5U/2226. Input 22 24 v., D.C. Output 80 v. at 1,600 cycles, 240 v.A. Carbon pile V/R and filter unit incorporated. In good condition. PRICE ONLY £ 45/-, carriage 5/-.
3 GOLDHAWK ROAD, SHEPHERDS BUSH, LONDON, W.12
Telephone: SHEpherds Bush 1729

THE HIGH-FIDELITY MAIL ORDER SPECIALISTS
GOODS DESPATCHED BY RETURN
Carriage, Packing & Insurance (U.K.) FREE !!
AMPLIFIERS TUNERS · SPEAKERS MOTORS · PICK-UPS · MICROPHONES CABINETS · TAPE RECORDERS
Quad, Leak, Rogers, Dulci, Armstrong, Chapman, Jason, Wharfedale, T.S.L., Goodmans, Garrard, G.E.C., Connoisseur, W.B., Collaro, Lenco, Acos, B.J. Philips, Lustraphone, Record Housing, Ferrograph, Vortexion, Brenell, Wearite, Tannoy, Lowther, Ronette, Hi-sord, etc.
Hire Purchase Terms available • "Comparator" Demonstrations
WORLD WIDE EXPORTERS
★ OVERSEAS ORDERS SENT FREE OF PURCHASE TAX AND SHIPPED PROMPTLY AT MINIMUM COST ★
C. C. GOODWIN (SALES) LTD.
(Dept.W.14) 7, THE BROADWAY, WOOD GREEN, LONDON, N.22 Callers Welcomed Tel. BOWes Park 0077/8.

ELECTRONICALLY STABILIZED POWER SUPPLIES



TYPE 800. Output 300V +ve 200 mA. Valves: 2 of GZ32, 3 of 12E1, 1 of 6AM6, 2 of 85A2, 1 of STV30/20. Power components rated 500 mA. Size 19in. × 9in. × 12in. deep.

PRICE £19-10-0



TYPE 800. Output 200V −ve 120 mA. Valves: 1 of GZ32, 1 of 12E1, 1 of 6AM6, 2 of 85A2, 1 of STV30/20. Power components rated 200 mA. Size 19in. × 7in. × 9in.

PRICE £8-10-0

The outputs of both power units are well stabilized against load and mains fluctuations, ripple under 10 mV. Nominal input 230V. 50 cycles.

The units are as new and robustly constructed with "C" core transformers, paper dielectric smoothing condensers and incorporate a load isolating relay.

The output voltage is adjustable over a narrow range, but they can be modified quite easily for a fully variable output.

All units are supplied in perfect working order, complete with leads, circuits and plug; are easily mounted in a 19in. rack, and are suited to most laboratory requirements.

Further information including full performance data free on request.



LOW VOLTAGE POWER UNIT TYPE 15 D.C. unregulated power unit providing two separate smoothed outputs of −50V. 4A. each (+ wired to chassis). Output impedance 4.3 ohms, ripple 1 Volt R.M.S. at full load Input 230V. 50 cycles. Switched metering of current, output voltage on each channel and also A.C. input voltage. Size 13½in. × 12in. × 20½in.

PRICE £19-10-0

All Instruments post and packing free in U.K.

PRECISION CONDENSERS. Silver Mica by L.E.M. or Johnson Matthey. 200V. wkg. Ideal for bridges, etc. All brand new and full list on request.

0.5 mf. 1%, 4/6; 0.5 mf. 5%, 2/6; 0.25 mf. 1%, 3/3; 0.25 mf. 2%, 2/-; 0.2 mf. 2%, 2/-; 0.1 mf 1%, 2/6; 0.02 mf. 2%, 1/-; 0.01 mf. 2%, 1/-. P.P. on single condenser, 6d., 3 or more post free.

PORTLAND ELECTRONICS LTD

29 PORTLAND PLACE
STALYBRIDGE CHESHIRE
STA 2148

SOUTH SUPPLIES

(ELECTRICAL) LTD.)

95, OLD KENT ROAD, LONDON, S.E.1.
99, HIGH STREET, EDGWARE, MIDDX.
124, JUNCTION ROAD, LONDON, N.19
72 BOROUGH HIGH STREET S.E.1.

SMITH'S SECTRIC CLOCKS

all at 25% OFF maker's prices.

With full manufacturer's guarantee. 200-250 v' 50 cycles.



	List	Our Price
BESWOOD	105/-	78/6
CROMER	95/-	71/-
DRAYTON	92/6	69/6
DEBENHAM	73/-	54/6
HAND WIND		
SEAFARER	29/6	21/6

Plus Postage and Packing 2/-.

AMPLIFIER & SPEAKER in Cabinet

Ex-Rental. Tested and in good working order. deal Guitar Amplifier. Complete with valves.

37/6 Plus 3/- post and packing.

R.C.A. AUTO CHANGERS

4 speed Ronette head. Brand new. A snip for the specialist.

£7.19.6



12-CHANNEL TURRET TUNER

BRAND NEW. Fitted with coils 1 to 5 and 8 to 9. 34/38 Mc/s. Complete with P.C.F. 80 and P.C.C. 84 Valves. Manufacturer's price £7/7/-.

OUR PRICE **33/-** Carriage paid.

FREE with every order for a BLACK & DECKER D.500 DRILL at £6.19.6

we supply the following attachments

ABSOLUTELY FREE

● 13 DRILLS ● HOLE SAW
● RUBBER DISC ● 6 SANDING DISCS
● LAMBSWOOL BONNET

ELECTRIC CLOCK, AUTO COOKER TIMER & TIME SWITCH

BRAND NEW. Modernise and add pounds to the value of your electric cooker Ideal for automatic cooking, or any heat or current control Complete with handsome electric clock. 200/250 v. 30 Amp. Full fitting instructions. Plus 2/6 P. & P.

OUR PRICE **£3.17.6**

Smith's of EDGWARE ROAD

COMPONENT DISTRIBUTORS

Guaranteed components— made specially for us :—

1% tol. SILVER MICA CAPACITORS
84 standard values always in stock.

5-1000pF	9d.	1200-3000pF	1/-
2200-3000pF	1/3	3260-5000pF	1/6

P.V.C. COV'D ELECTROLYTIC CAPACITORS
Bias 1/6 to 2/3. Smoothing 1/7½ to 3/3
Dual 4/3 to 6/-. Full List No. 16.
1½in. dia. CAN TYPES 350/500 V. from 4/-

1½in. dia. POTENTIOMETERS 5in. shaft 10K, 25K, 50K, 100K (linear), 250K, 500K, 1M, 2M (log.) 3/-. With switch 4/6.

MINIATURE MAINS TRANSFORMER
Pri. 0-200-220-240 v. Sec. 250 v. 40 mA., 6.3 v. 1.5 amp
Stack size 2½ × 1½ × 1¼in., 14/6.

CELLULOSE WADDING for resonance damping. 40 ply 36in. wide, 5 yd. roll 18/-, post 2/-.
Sole distributors for this area.

IMPORTED HIGH STABILITY RESISTORS
Miniature half-watt 5% "Preferred value" range (144 values—12 to 10MΩ). Very popular line 6d. ea.

WIMA "TROPYDUR" PAPER CAPACITORS
Flat oval shape. Small size. Glazed surface.

mfd.	tol.	250V	500V	mfd.	tol.	250V	500V
.01	20%	6d.	7d.	.15	10%	1/1	1/3
.015	20%	6d.	7d.	.22	10%	1/3	1/4
.022	20%	6d.	9d.	.33	10%	1/3	1/4
.033	20%	8d.	9d.	.35	10%	1/3	1/6
.047	20%	9d.	10d.	.47	10%	1/6	1/9
.05	20%	9d.	10d.	.68	10%	1/7	2/3
.068	20%	10d.	11d.	1.0	10%	2/1	2/6
.1	10%	1/-	1/1				

"SURPLUS" HIGH STABILITY RESISTORS
Best makes. Largest selection available. 145 standard values plus many others.

5% ½W. 7½d.	½W. 9d.	1W. 10½d.
2% ½W. 10d.	½W. 1/-	1W 1/3
1% ½W. 1/3	½W. 1/6	1W. 1/9

Ordinary Carbon Resistors ½W. 3d., ½W. 4d. Also Carbon and Wire wound to 200W. Full list No. 5.

AND, OF COURSE, OUR OWN PRODUCTS

Precision-made ALUMINUM

BLANK CHASSIS

Commercial quality, half-hard 16 s.w.g. Same day service. ANY SIZE to nearest 1/16in. 2, 3 or 4 sided.
Max. length 17in., depth 4in.
Specials dealt with promptly. ¼in., ⅜in. or ½in. flanges (inside or outside). 6d. each extra.
Riveted or soldered corners 6d. each extra.

Price Guide (normal chassis only):—
Total area of material including waste:

48 sq. in. 6/-	176 sq. in. 9/-	264 sq. in. 12/-	
80 sq. in. 5/-	208 sq. in. 9/-	336 sq. in. 13/-	
112 sq. in. 6/-	240 sq. in. 10/-	368 sq. in. 14/-	
144 sq. in. 7/-	272 sq. in. 11/-	and pro rata	

post 1/3 post 1/6 post 1/9
Quantity and trade discounts. Finishes arranged for quantities of 25 or over.

PANELS
Any size up to 3ft. at 4/6 sq. ft.
Postage (sq. in.):—72 9d.: 108 1/3; 144 1/6; 432 1/9; 576 2/-.

THE WELL-KNOWN

COOPER-SMITH HI-FI AMPLIFIERS

Each the best in its class— yet you can build it yourself!

	KIT	BUILT
STEREO Control Unit	£12 12 0	£15 0 0
STEREO Main Amplifier	£13 13 0	£16 0 0
Mk. II Control Unit	£7 17 6	£10 17 6
R.P.I. Main Amp. 10/12 W.	£12 7 0	£14 6 0
20W. Power Amplifier	£21 5 6	£23 13 6
'PRODIGY' 6/9W. Integrated	£12 10 0	£16 15 0
'BANTAM' 3/4W. Integrated	£7 10 0	£8 5 0

Building instructions 2/6 each.
(Bantam 1/6; 20W. 5/-.)

Please add postage for all orders under £2

H. L. SMITH & CO. LTD

287/289 EDGWARE ROAD LONDON, W.2
Telephone Paddington 5891/7595

INDEX TO ADVERTISERS

PAGE

A.A. Tools ... 166
Acoustical Mfg. Co., Ltd. ... 29
Adcola Products, Ltd. ... 52
Advance Components, Ltd. ... 26, 93
Airmec, Ltd. ... 105
Alpha Radio Supply Co., Ltd. ... 120
Alpha Television ... 173
Anders Electronics, Ltd. ... 8
A.N.T.E.X., Ltd. ... 50
Appointments Vacant ... 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176
Arcolectric Switches, Ltd. ... 80
Ardente Acoustic Laboratories, Ltd. ... 50
Armstrong Wireless & Television Co., Ltd. ... 64, 103
Associated Electrical Industries, Ltd. ... 75, 77, 79, 81, 96, 103, 104, 188
Associated Rediffusion, Ltd. ... 36, 37
Audix, B. B., Ltd. ... 150
Automatic Telephone & Electric Co., Ltd. ... 107, 176
Aveley Electric, Ltd. ... 23
Avo, Ltd. ... 1, 82

Batey, W., & Co. ... 180
Belling & Lee, Ltd. ... 101
Benson, W. A. ... 150
Bentley Acoustic Corporation, Ltd. ... 144
Berry's Radio ... 94
Borough Polytechnic ... 168
Bradmatic Productions, Ltd. ... 186
Brenell Engineering, Ltd. ... 4
Brimar, Ltd. ... 33
Britain, Chas. (Radio), Ltd. ... 129
British Institute of Engineering Technology ... 171
British Insulated Callenders Cables, Ltd. ... Cover ii
British Relay Wireless, Ltd. ... 170
Brookes Crystals, Ltd. ... 88
Broom & Wade, Ltd. ... 66
Bulgin, A. F., & Co., Ltd. ... Edit. 49
Bullers, Ltd. ... 64

Candler System Co. ... 176
Cardross Engineering, Ltd. ... 90
Cathodeon Crystals, Ltd. ... 15
C.G.S. Resistance Co., Ltd. ... 116
Channel Electronic Industries, Ltd. ... 56
Clyne Radio, Ltd. ... 134, 135, 136
Cosmocord, Ltd. ... 100
Coventry Controls, Ltd. ... 95
Coventry Radio ... 167
Crawshay, P. B. ... 150
C.R.E.I. (London) ... 169

Daly (Condensers), Ltd. ... 76
Danavox ... 47
Davies, A. J., Co. ... 188
Davis, Jack (Relays), Ltd. ... 116
Days'rom, Ltd. ... 9, 10, 11
De Havilland Propellors, Ltd. ... 167
Denco (Clacton), Ltd. ... 92
Dependable Radio Supplies, Ltd. ... 154
Derritron Electronic Group ... 83
Dickinson's of Pall Mall ... 164
Direct T.V. Replacements, Ltd. ... 43
Drayton Regulator & Instrument Co., Ltd. ... 40
Dubilier Condenser Co. (1925), Ltd. ... 59
Duke & Co. ... 145
Duode Natural Reproducers ... 185

Eddy's (Nottm.), Ltd. ... 177
Egen Electric, Ltd. ... 90
E.I.R. Instruments, Ltd. ... 154
Electro-Acoustic Industries, Ltd. ... 45
Electro-Methods, Ltd. ... 24
Electronic & Mechanical Eng. Co., Ltd., The ... 124
Electronic Components ... 74
Electronic Precision Equipment, Ltd. ... 113
Electronic Tubes, Ltd. ... 46
Electronics (Croydon), Ltd. ... 113
Electronics (Pinsbury Park), Ltd. ... 113
Electronics (Fleet Street), Ltd. ... 113
Electronics (Manor Park), Ltd. ... 113
Electronics (Ruislip), Ltd. ... 113
Electro-Winds, Ltd. ... 154
Elliott Bros. (London), Ltd. ... 27, 174
Empire Rubber Co., Ltd. ... 2
Engineering & Scientific Advisors, Ltd. ... 176
English Electric Aviation, Ltd. ... 170
English Electric Valve Co., Ltd. ... 42
English Electric Valve Co., Ltd. ... 161
Enthoven Solders, Ltd. ... 86
Eta Tool Co., Ltd. ... 84

Fane Acoustics, Ltd. ... 116
Farnell Instruments, Ltd. ... 175
Ferranti, Ltd. ... 87, 112
F.N.I.E. ... 114
Fringevision, Ltd. ... 58

PAGE

Gardners Radio, Ltd. ... 56
Garrard Eng. & Mfg. Co., Ltd., The ... 51, 183
Gee Bros. (Radio), Ltd. ... 155
General Electric Co., Ltd. 40, 52, 89, 99, 172, 175
General Sonic Radios ... 184
Gilfillan, R., & Co., Ltd. ... 124
Gilson, R. F., Ltd. ... 90
Gladstone Radio ... 150
Glaser, L., & Co., Ltd. ... 180
Goodmans Industries, Ltd. ... 7
Goodwin, C. C. (Sales), Ltd. ... 188
Govt. Communications H.Q. ... 173, 174
G.P.O. ... 176
Gramophone Co., Ltd., The ... 12
Grampian Reproducers, Ltd. ... 114
Grayshaw Instruments ... 154

Hall Electric, Ltd. ... 51
Harmsworth, Townley & Co. ... 22
Harridge, H. C. ... 164
Harringay Photographic & Electrical Supplies, Ltd. ... 188
Harris Electronics (London), Ltd. ... 121
Harris, P. ... 182
Harverson Surplus Co., Ltd. ... 148, 149
H.B. Trading ... 170
Henry's (Radio), Ltd. ... 118, 119
Hewlett Packard ... 117
Hilger & Watts, Ltd. ... 176
Hivac, Ltd. ... 28
H.P. Radio Services, Ltd. ... 86
Hunton, Ltd. ... 58

Iliffe & Sons, Ltd. ... 78
Imperial Chemical Industries, Ltd. ... 91
Independent Television, Ltd. ... 176
International Computers and Tabulators ... 175
International Correspondence Schools ... 165, 168, 170
Irongate (M.O.) Co. ... 160

Jackson Bros. (London), Ltd. ... 62

Kenure, Holt & Co., Ltd. ... 114
Keyswitch Co., The ... 21
Kodak, Ltd. ... 172

Lasky's Radio, Ltd. ... 126, 127, 128
Lawson Tubes ... 180
Leak, H. J., & Co., Ltd. ... 111
Ledon Instruments ... 187
Lee Products ... 76
Levell Electronics ... 94
Lewis Radio Co. ... 187
Light Soldering Developments, Ltd. ... 186
Linear Products, Ltd. ... 88
London Central Radio Stores ... 177
Ludfry, Ltd. ... 184
Lyons Radio, Ltd. ... 188

Malvyn Engineering Works ... 164
Marconi-Canada ... 166
Marconi Instruments, Ltd. ... 53, 68
Marriott, P. A., & Co., Ltd. ... 164
McCarthy Radio, Ltd. ... 177
McMurdo Instrument Co., Ltd. ... 18
Mills, W. ... 156
Ministry of Aviation ... 168
Minnesota Mining & Mfg. Co., Ltd. ... 102
Modern Book Co. ... 186
Modern Electrics (Retail), Ltd. ... 82
M. O. Valve Co., Ltd. ... 174
Morgan Crucible Co., Ltd. ... 83
M. R. Supplies, Ltd. ... 86
M. S. Radiopost ... 152
Mullard, Ltd. ... 3, 13, 98
Mullard, Ltd. ... 16B, 16C
Multicore Solders, Ltd. ... 182, Cover iv
Multitone Electric Co., Ltd. ... 168

National Cash Register Co., Ltd. ... 172
National College of Heating ... 168
Neoflex, Ltd. ... 92
Neo Mail Order Supplies ... 164
Newmarket Transistors, Ltd. ... 57
Nu-Gun Teletubes ... 188

Oddie Bradbury & Cull, Ltd. ... 164
Oliver Socket Screws, Ltd. ... 82

PAGE

Painton & Co., Ltd. ... 34, 176
Parker, A. B. ... 122
Partridge Transformers, Ltd. ... 181
P.C. Radio ... 152, 154, 163
Pembridge College of Electronics ... 171
Permagon Press ... 74
Philips Electrical, Ltd. ... 176
Philips, N. V. ... 30, 31
Phenix Telephones, Ltd. ... 25
Pitman, Sir Isaac, & Son, Ltd. ... 160
Pressey Co., Ltd. ... 110, 178
Plessey International, Ltd. ... 166A
Portland Electronics ... 189
Post Radio Supplies ... 186
Precious Metal Depositors ... 94
Preformations, Ltd. ... 115
Premier Radio Co. ... 138, 139
Proops Bros., Ltd. ... 130, 131, 132, 133
Pye, Ltd. ... 14, 19, 166

Quartz Crystal Co., Ltd. ... 164

Radio & Electrical Mart ... 180
Radio & T.V. Components (Acton), Ltd. ... 157
Radio Clearance, Ltd. ... 125
Radio Component Specialists ... 137
Radio Exchange Co., The ... 187
Radiospares, Ltd. ... 88
Radiostructor ... 106, 168
Radio Supply Co. (Leeds), Ltd. 142, 143, 144
Rank Cintel, Ltd. ... 5
Redifon, Ltd. ... 108
Reida Radio, Ltd. ... 151
Roe, A. V., Ltd. ... 173
Rollet, H. & Co., Ltd. ... 180
Royal Aircraft Establishment ... 164

Salford Electrical Instruments, Ltd. ... 35, 60
Samsons Surplus Stores ... 162
Sanders, W. H., Ltd. ... 92
Service Trading Co. ... 140, 141
Servo & Electronic Sales ... 180
Shawndel Fayers, Ltd. ... 78
Sheendale Products, Ltd. ... 180
Sifam Electrical Instruments, Ltd. ... 188
Sim-Tech Book Co. ... 184
Smith, A. K., & L. O., Ltd. ... 164
Smith, G. W. (Radio), Ltd. ... 122, 123, 124
Smith, H. L., & Co., Ltd. ... 189
Solartron Electronic Group, Ltd. ... 16, 173
Sound Sales, Ltd. ... 120
Southern Instruments, Ltd. ... 72
Southern Radio Supply, Ltd. ... 177
Southern Technical Supplies ... 116
South Midland Construction, Ltd. ... 188
South Supplies (Electrical), Ltd. ... 189
Stamford, A. L. ... 185
Standard Telephones & Cables, Ltd. ... 65, 67, 69, 71, 73
Steatite Insulations, Ltd. ... 85
Stern Radio, Ltd. ... 146, 147
Suffix, Ltd. ... 17
Sugden, A. R., & Co. (Engineers), Ltd. ... 54
Swindon Condenser Co., Ltd. ... 43

Technical Suppliers, Ltd. ... 158
Technical Trading Co. ... 156
Telegraph Condenser Co., Ltd. ... Cover iii
Telemechanics, Ltd. ... 66
Telenq, Ltd. ... 55
Telequipment, Ltd. ... 44
Tele-Radio (1943), Ltd. ... 80
Teletron Co., The ... 164
Thermo-Couple Components (London), Ltd. ... 6
Thomas, Richard, & Baldwins, Ltd. ... 38
Torel Industrial Corp. ... 60
Trix Electrical Co. Ltd. ... Edit. 47
T.R.S. Radio ... 159
Twickenham Technical College ... 170

U.K.A.E.A. ... 172, 175
Unicates, Bliss & Co., Ltd. ... 152
Universal Book Co ... 164
Universal Electronics ... 158

Vacuum Electronics, Ltd. ... 188
Vacwell Engineering Co., Ltd. ... 32
Va.radio, Ltd ... 84
Venner Accumulators, Ltd. ... 20
Venner Electronics, Ltd. ... 41
Vitality Bulbs, Ltd. ... 116
Vortexion, Ltd ... 109
V.Z. Electrical Service ... 164

Walcom, Ltd ... 62
Wilmore Electronics, Ltd. ... 70
Watts, Cecil E. ... 180
Webber, R. A., Ltd. ... 82
Webb's Radio ... 84
Wellington Laboratories ... 188
Western Airwave, Ltd. ... 176
Weymouth Radio Mfg. Co., Ltd., The ... 92
Wharfedale Wireless Works, Ltd. ... 39
Wilkinson L. (Croydon), Ltd. ... 153
Wirecomp Electronics ... 119
Wright, J. F. ... 185

Z. & I Aero Services, Ltd. ... 178, 179

Printed in Great Britain for the Publishers, ILIFFE ELECTRICAL PUBLICATIONS LTD., Dorset House, Stamford St., London, S.E.1, by CORNWALL PRESS LTD., Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd., Eastern News Co., 306 West 11th Street, New York 14. UNITED STATES: William Dawson & Sons (U.S.A.), Ltd.

TCC Tantalum Condensers

These have the advantages of high capacity values for small size and have been recognised by designers as a contribution towards solving the many problems arising from the replacement of the larger or bulkier paper dielectric condensers by electrolytics.

The Tantalum Foil construction permits the use of an Electrolyte that is substantially neutral, thus precluding the possibility of corrosion to surrounding parts should the Condenser suffer direct mechanical damage whilst in operation.

The extended shelf life of Tantalum Condensers is such that preliminary re-ageing is unnecessary, even after long dormant periods, and the reliability remains unimpaired.

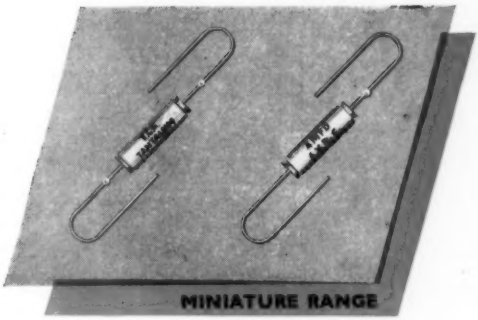

MINIATURE RANGE (– 40°C to +85°C)

Capacities from 4 μF at 6v. to 0·2 μF at 150v.

Small size, light weight and reliability, particularly with regard to long shelf life. Suitable for Transistor circuitry, Airborne equipments, communications, high quality Hearing Aids and Timing Circuits.

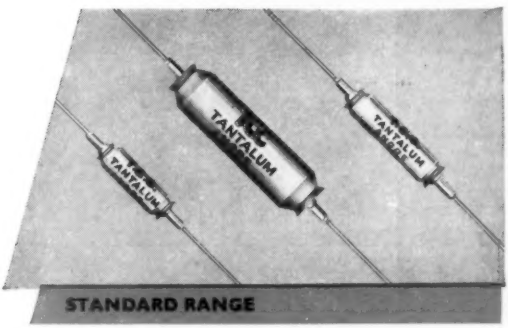

STANDARD RANGE (– 50°C to +85°C)

Capacities from 200 μF at 6v. to 15 μF at 150v.

For equipments where low temperature conditions are met, and for apparatus working for prolonged periods without the need for servicing. Airborne and miniature transistorised assemblies are some of the latest applications.

HIGH TEMPERATURE RANGE (– 55°C to + 125°C)

Capacities from 16 μF at 6v. to 16 μF at 150v.

Ideal for use in equipments where extremes of temperature are encountered, such as aircraft, guided missiles, etc., and into specialised apparatus operating for long periods without attention.

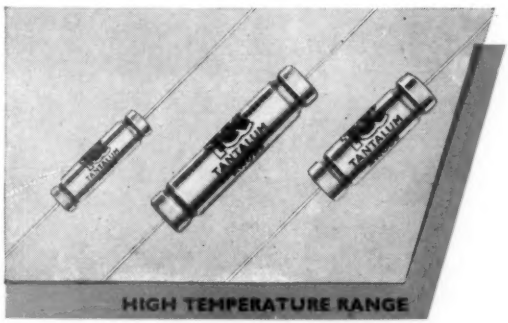

General Characteristics

Type of construction: Polarised or non-polarised plain foil.

Capacity tolerance: –20%+50% (Miniature) ±20% elsewhere.

Power factor: 8% at 50 c.p.s. but 12% below 15v. working.

Max. leakage current: 2 μA after 10 mins. at working voltage (Miniature); elsewhere ·01 μA/μF/Volt, or 2 μA, whichever is the greater.

Technical Bulletins Nos. 58, 63 and 71, giving full details of these condensers, are available on request.

CONDENSER SPECIALISTS SINCE 1906

THE TELEGRAPH CONDENSER CO LTD

RADIO DIVISION · North Acton · London · W3 · *Tel: Acorn 0061*

10 times longer Bit life with

ERSIN Multicore SAVBIT ALLOY

Developed after prolonged research in the Multicore Laboratories, Ersin Multicore Savbit Type 1 Alloy lengthens the life of copper soldering iron bits by up to ten times. It incorporates a small percentage of copper, and this prevents absorption of copper from the bit into the solder alloy. By keeping the bits in good condition, the use of Ersin Multicore Savbit Alloy speeds soldering and increases efficiency. Savbit Alloy has been proved on the production lines of leading manufacturers throughout the world. Ersin Multicore Savbit Type 1 Alloy is made under sole British Licence of Patent No. 721,881.

SAVBIT FOR FACTORIES

Ersin Multicore Savbit Alloy containing 5 cores of non-corrosive flux is supplied to factories at bulk prices on 7 lb. reels. The popular 16 and 18 s.w.g. diameters are suitable for most soldering processes. Supplies are also available on 1 lb. reels.

PUBLICATIONS

Laboratory engineers and technicians are invited to write on their company's letter heading for the latest edition of Modern Solders, which contains a wealth of information on melting points, gauges, alloys, etc.

See advertisement on inside page for details of Multicore packs for Service Engineers and Home Constructors.

MULTICORE SOLDERS LIMITED · MULTICORE WORKS · HEMEL HEMPSTEAD · HERTS · Telephone: BOXMOOR 3636

, 1961

ch
rsin
ring
ge
se
f
ut
er

oy con-
rrosive
ries at
ls. The
meters
ldering
o avail-